


PNEUMATIC AUTOMATION COMPONENTS



MEAD

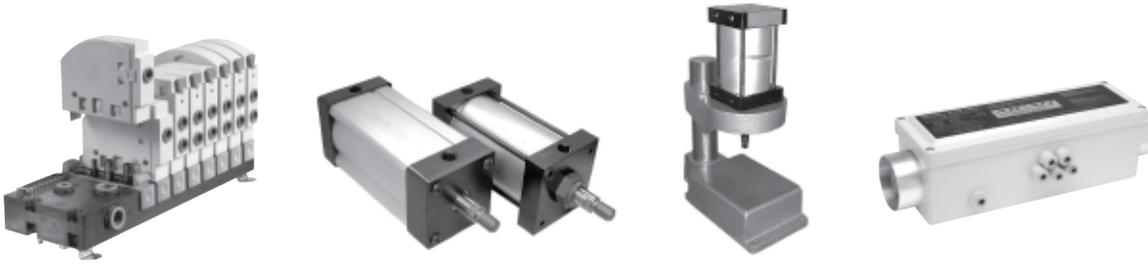

MEAD

a *BIMBA* company

Table Of Contents

1-3 Reference

- 1 Cylinder Finder
- 2-3 Valve Finder

4-31 Control Valves

- 4-9 Isonic® MOD3 V3000 V5000
- 11-19 Isonic® V1000, V2000 and V4000
- 20-21 Nova
- 22-23 Capsula
- 24 Dura-Matic
- 25 Light-Touch
- 26-27 LTV
- 28-29 MV
- 30-31 Foot, Hand & Button Valves

32-56 Cylinders

- 32-33 Small Bore Tie Rod
- 34-39 DM1 & DM2 NFPA Interchangeable
- 40-47 HD1 NFPA Heavy-Duty
- 48-49 Large Bore HD NFPA Heavy Duty
- 50-51 Round Body
- 53 SpaceSaver™ Compact
- 54 Single-Acting
- 55-56 Miniature

57-58 Specialty Valves

- 57 Slide Lock
- 57 Hand Lever
- 58 Binary
- 58 Mini Solenoid

59-63 Specialty Valves (Continued)

- 59 Air Timers
- 59 Impulse Relays
- 60 Stroke Completion Sensors
- 60 Air to Electric Switches
- 61 Panel Mount/PTO
- 62 Flow Controls
- 63 Two-Hand Control Units

64-67 Production Devices

- 64-66 Air Presses
- 67 Collet Fixtures
- 67 Air Hammer

68-69 Accessories

- 68 RAF & RAFK; Right Angle Flow Controls
- 68 Female DIN Solenoid Connectors
- 68 Manifold
- 69 Quick Exhaust
- 69 Shuttle Valves
- 69 Air Silencers & Breathers

70-72 Index

- 70 Custom Products
- 71-72 Product Index

MEAD

Mead Fluid Dynamics, Inc.

Mead USA

4114 N. Knox Ave.
Chicago, IL. 60641
773.685.6800
773.685.7002 Fax
Customer Service Toll Free Number
877-MEAD USA (877-632-3872)
sales@mead-usa.com

**Downloadable:
PDF Files and CAD Drawings
Exploded Views
Please visit www.mead-usa.com**

PNEUMATIC AUTOMATION COMPONENTS
Edition MMIX

Mead offers a wide selection of cylinder styles.

Dyna-Mation (DM/DM1/DM2)



NFPA Interchangeable Extruded Body Design
1 1/2" Through 4" Bore Sizes
3/4" & 1 1/8" Tie Rod Models Avail.

Heavy-Duty (HD1)



External Rod Bearing
NFPA Interchangeable Tie Rod Design
1 1/2" Through 6" Bore Sizes

Large Bore (HD)



NFP Style Cylinders Tie Rod Design
Bore Sizes: 5, 8, 10, 12

Centaur (C)



Heavy Duty Round Non-Lube Cylinder
Easy To Mount
1 1/8" Through 3" Bore Sizes

Space Saver (SS)



Highly Compact Low Profile Cylinder
3/4" Through 4" Bore Sizes

Air Clamps (H)



Single-Acting Cylinders Adjustable Stroke
Models Available
1" Through 6" Bore Sizes

Miniature (M)




Fractional Stroke Cylinders Universal Mounting
1/4", 3/8" & 1/2" Bores

Bore	Model Number	Rod Diam. (In.)	Port Size (NPTF)	Stroke Availability (In.)	Double or Single Acting	Output at 100 PSI (lbs.)	Max. Air Inlet Pressure (PSI)	Max. Oil Inlet Pressure (PSI)	See Pages
1/4"	MA-250	.561	10-32	To 2	DA/SA	5	125	No	56
	MF-250	.561	10-32	To 2	DA/SA	5	125	No	55
3/8"	MA-375	.687	10-32	To 2	DA/SA	11	125	No	56
	MF-375	.687	10-32	To 2	DA/SA	11	125	No	55
1/2"	MA-500	.812	10-32	To 2	DA/SA	20	125	No	56
	MF-500	.812	10-32	To 2	DA/SA	20	125	No	55
3/4"	DM-075	5/16	1/8	Any	DA	44	250	1,000*	32-33
	SS-075	5/16	10-32	To 2	DA	44	250	No	53
1"	H-1	5/16	1/8	1 1/16	SA	68	150	No	54
	HOXO1	5/16	1/8	0 to 2	SA	62	150	No	54
1 1/8"	DM-112	5/16	1/8	Any	DA	100	250	1,000*	32-33
	C-112	5/16	1/4-28 or 1/8	Any	DA	100	250	250	50-51
	SS-112	1/2	10-32	To 3	DA	100	150	No	53
1 1/2"	DM1-150	5/8	1/4	Any	DA	177	250	1,000	34-39
	DM2-150	5/8	1/4	Any	DA	177	250	1,000	34-39
	HD1-150	5/8 or 1	1/4	Any	DA	177	250	1,000	40-47
	C-150	1/2	1/4	Any	DA	177	150	250	50-51
	SS-150	1/2	10-32	To 3	DA	177	150	No	53
2"	DM1-200	5/8	1/4	Any	DA	314	250	1,000	34-39
	DM2-200	5/8	1/4	Any	DA	314	250	1,000	34-39
	HD1-200	5/8 or 1	1/4	Any	DA	314	250	1,000	40-47
	C-200	5/8	1/4	Any	DA	314	150	250	50-51
	SS-200	5/8	1/8	To 3	DA	314	150	No	53
2 1/4"	H-41	1/2	1/8	1	SA	316	150	No	54
	H-42	1/2	1/8	2	SA	353	150	No	54
	H-43	1/2	1/8	3	SA	351	150	No	54
2 1/2"	DM1-250	5/8	1/4	Any	DA	491	250	1,000	34-39
	DM2-250	5/8	1/4	Any	DA	491	250	1,000	34-39
	HD1-250	5/8 or 1	1/4	Any	DA	491	250	1,000	40-47
	C-250	3/4	1/4	Any	DA	491	150	250	50-51
	SS-250	5/8	1/8	To 3	DA	491	150	No	53
3"	C-300	1	1/4	Any	DA	707	150	250	50-51
	SS-300	3/4	1/8	To 3	DA	707	150	No	53
	H-71, -72, -73	3/4	1/4	1, 2, 3	SA	682	150	No	54
3 1/4"	DM1-325	1	1/2	Any	DA	829	250	700	34-39
	DM2-325	1	1/2	Any	DA	829	250	700	34-39
	HD1-325	1 or 1 3/8	1/2	Any	DA	829	250	700	40-47
4"	DM1-400	1	1/2	Any	DA	1,257	250	650	34-39
	DM2-400	1	1/2	Any	DA	1,257	250	650	34-39
	HD1-400	1 or 1 3/8	1/2	Any	DA	1,257	250	650	40-47
	SS-400	3/4	1/8	To 3	DA	1,257	150	No	53
	H-122	3/4	3/8	2 5/8	SA	1,204	150	No	54
5"	HD-500	1 or 1 3/8	1/2	Any	DA	1,964	250	900	48-49
6"	DM-600	1 3/8	3/4	Any	DA	2,827	250	435	34-39
	HD-600	1 3/8 or 1 3/4	3/4	Any	DA	2,827	250	435	48-49
	H-283	1/4	1/2	3	SA	2,763	150	No	54
8"	HD-800	1 3/8 or 1 3/4	3/4	Any	DA	5,027	200	500	48-49
10"	HD-1000	1 3/4 or 2	1	Any	DA	7,854	200	400	48-49
12"	HD-1200	2 or 2 1/2	1	Any	DA	11,310	200	400	48-49

* Specify "FOR HY USE" when ordering

Available Mounting Styles

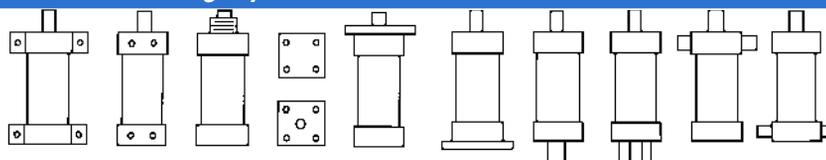

Foot	Flush	Nose	Flush	Flange	Flange	Pivot	Clevis	Trunnion	Trunnion
------	-------	------	-------	--------	--------	-------	--------	----------	----------

Mechanically Actuated

Actuator	Model Number	Port Size	Flow (Cv)	Return Flow	Flow Pattern	See Pages
Straight Plunger	MV-5	1/8	0.11	Spring	3-Way	28-29
	MV-45	1/8	0.11	Spring	3-Way	28-29
	LTV-5	1/8	0.18	Int. Air	4-Way	26-27
	LTV-45	1/8	0.18	Int. Air	4-Way	26-27
	FC-51	1/8	0.81	Spring	3-Way	30-31
	3C-1	1/4	0.48	Spring	3-Way	30-31
	FC-101	3/8	1.15	Spring	3-Way	30-31
Straight Leaf	MV-10	1/8	0.11	Spring	3-Way	28-29
	MV-70	1/8	0.11	Spring	3-Way	28-29
	LTV-10	1/8	0.18	Int. Air	4-Way	26-27
Roller	MV-15	1/8	0.11	Spring	3-Way	28-29
	MV-90	1/8	0.11	Spring	3-Way	28-29
	MV-25, MV-30	1/8	0.11	Spring	3-Way	28-29
	MV-75	1/8	0.11	Spring	3-Way	29-29
	LTV-15	1/8	0.18	Int. Air	4-Way	26-27
	LTV-25, LTV-30	1/8	0.18	Int. Air	4-Way	26-27
	LTV-75	1/8	0.18	Int. Air	4-Way	26-27
One-Way	MV-20	1/8	0.11	Spring	3-Way	28-29
Roller	MV-80	1/8	0.11	Spring	3-Way	28-29
	LTV-20	1/8	0.18	Int. Air	4-Way	26-27
	LTV-80	1/8	0.18	Int. Air	4-Way	26-27
Extended Rod	MV-85	1/8	0.11	Spring	3-Way	28-29
	LTV-85	1/8	0.18	Int. Air	4-Way	26-27
Ball	MV-40	1/8	0.11	Spring	3-Way	28-29
	LTV-40	1/8	0.18	Int. Air	4-Way	26-27
Fingertip Lever	MV-50	1/8	0.11	Spring	3-Way	28-29
	LTV-50	1/8	0.18	Int. Air	4-Way	26-27
	N2-HL	1/4	1.00	Spring	4-Way	20-21
	FT-101	3/8	1.15	Spring	3-Way	30-31
	FT-4	1/8	0.16	Spring	4-Way	30-31
Low Stress	LTV-PBG(F)	1/8	0.18	Int. Air	3 or 4-Way	25
Straight Lever	C2-7	1/4	0.75	Spring	4-Way	22-23
	C5-7	1/2	3.17	Spring	4-Way	22-23
	C2-8	1/4	0.75	Hand	4-Way	22-23
	C5-8	1/2	3.17	Hand	4-Way	22-23
	4B-1	1/4	0.48	Hand	4-Way	30-31
Push Button & Palm	MV-140	1/8	0.11	Spring	3-Way	28-29
	LTV-125	1/8	0.18	Int. Air	4-Way	26-27
	LTV-140	1/8	0.18	Int. Air	4-Way	26-27
	PC-51	1/8	0.81	Spring	3-Way	30-31
	MV-MH	1/8	0.11	Spring	3-Way	28-29
	LTV-MH	1/8	0.18	Int. Air	4-Way	26-27
	MV-EH & MV-FH	1/8	0.11	Spring	3-Way	28-29
	LTV-EH & LTV-FH	1/8	0.18	Int. Air	4-Way	26-27
	MV-ES	1/8	0.11	Spring	3-Way	28-29
	MV-EMS	1/8	0.18	Detent	3-Way	28-29
	LTV-ES	1/8	0.18	Int. Air	4-Way	26-27
Double Button	N2-PB	1/4	1.00	Button	4-Way	20-21
Knob (Push-Pull)	LTV-130	1/8	0.18	Knob	4-Way	36-27
	PC-51A	1/8	0.81	Knob	3-Way	30-31
	ACV-16	5/32	0.053	Knob	4-Way	61
	ACV-25	1/4	0.12	Knob	4-Way	61
Flip Toggle	MV-35	1/8	0.11	Toggle	3-Way	28-29
	LTV-35	1/8	0.18	Toggle	4-Way	26-27
Twist (2 Pos.)	MV-TP	1/8	0.11	Twist	3-Way	28-29
	LTV-TP	1/8	0.18	Twist	4-Way	26-27

	Actuator	Model Number	Port Size	Flow (Cv)	Return Flow	Flow Pattern	See Pages
Electrically Actuated	Single Solenoid	LTV-115DD	1/8	0.18	Int. Air	4-Way	26-27
		N2-SCD	1/4	1.00	Spring	4-Way	21-20
		C2-4DCD	1/4	0.75	Spring	4-Way	22-23
		C5-4DCD	1/2	3.17	Spring	4-Way	22-23
		V1 (Isonic)	5/32 Tube	0.02	Spring	3-Way	11-12
		V2 (Isonic)	1/4 Tube	0.01, 0.02, 0.05	Spring or Ext. Air	3-Way	4-9
		V3 (Isonic)	1/4 Tube	0.03, 0.06, 0.11	Spring or Ext. Air	3-Way	4-9
		V4 (Isonic)	1/4 Tube	0.8	Spring	4-Way	16-19
		V5 (Isonic)	1/4 Tube	0.8	Spring or Ext. Air	4-Way	4-9
		MB12-3CSC	1/8	0.035	Spring	3-Way	58
		MB12-3USC	1/8	0.035	Spring	3-Way	58
		MB25-3CSC	1/4	0.035	Spring	3-Way	58
		MB12-2CSC	1/4	0.035	Spring	3-Way	58
		MB12-2CSC	1/8	0.035	Spring	2-Way	58
	MB25-2CSC	1/4	0.035	Spring	2-Way	58	
	Double Solenoid	LTV-120DD	1/8	0.18	Solenoid	4-Way	26-27
		N2-DCD	1/4	1.00	Solenoid	4-Way	20-21
		C2-5DCD	1/4	0.75	Solenoid	4-Way	22-23
		C5-5DCD	1/2	3.17	Solenoid	4-Way	22-23
		C2-6HDCD	1/4	0.75	Solenoid	4-Way	22-23
C2-6RDCD		1/4	0.75	Solenoid	4-Way	22-23	
V5 (Isonic)		1/4 Tube	0.8	Spring or Ext. Air	4-Way	4-9	
Air Actuated	Single Pressure	LTV-60	1/8	0.18	Int. Air	4-Way	26-27
		LTV-60L	1/8	0.18	Int. Air	4-Way	26-27
		L-10	1/8	0.11	Int. Air	4-Way	24
		K-10	1/8	0.18	Int. Air	4-Way	24
		N2-SP	1/4	1.00	Spring	4-Way	20-21
		V4 (Isonic)	1/4 Tube	0.8	Spring	4-Way	16-19
		W-10	1/4	0.63	Int. Air	4-Way	24
		C2-3	1/4	0.75	Spring	4-Way	22-23
		C5-3	1/2	3.17	Spring	4-Way	22-23
		MV-60	1/8	0.11	Spring	3-Way	28-29
	Double Pressure	MPE-BZ	1/8	-	Spring	Spec.	60
		MPE-BZE	1/8	-	Spring	Spec.	60
		LTV-110	1/8	0.18	Ext. Air	4-Way	26-27
		N-10	1/8	0.11	Ext. Air	4-Way	24
		M-10	1/8	0.18	Ext. Air	4-Way	24
		N2-DP	1/4	1.00	Ext. Air	4-Way	20-21
		V4 (Isonic)	1/4 Tube	0.8	Ext. Air	4-Way	17-19
		X-10	1/4	0.63	Ext. Air	4-Way	24
		C2-1	1/4	0.75	Ext. Air	4-Way	22-23
		C5-1	1/2	3.17	Ext. Air	4-Way	22-23
Single Bleed	T-10	1/8	0.11	Int. Air	4-Way	24	
	O-10	1/8	0.18	Int. Air	4-Way	24	
	Y-10	1/4	0.63	Int. Air	4-Way	24	
	404A	1/8	-	Spring	2-Way	24	
	405A	Spec.	-	Spring	2-Way	24	
Double Bleed	V-10	1/8	0.11	Ext. Bleed	4-Way	24	
	U-10	1/8	0.18	Ext. Bleed	4-Way	24	
	Z-10	1/4	0.63	Ext. Bleed	4-Way	24	
	N2-DB	1/4	1.00	Ext. Bleed	4-Way	20-21	
Foot Actuated	Pedal	2060400	1/4	0.11	Spring	3-Way	29
		N2-F4	1/4	1.00	Spring	4-Way	20-21
	Foot Treadle	4W-1	1/4	0.48	Foot	4-Way	30-31
		201	3/8	1.15	Foot	3-Way	30-31

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices


Accessories

Index

With an innovative concept and a pioneering approach to valve design, Mead's new technology has directly challenged the conventions of traditional valve manufacturers. In doing so, Mead has overcome many of the restrictions and limitations of conventional valve manufacturing, resulting in a unique design that minimizes valve size, reduces air turbulence and lowers valve costs.

Features & Benefits

- Fast Response
- Simultaneous Electrical / Pneumatic Connection to Manifold
- Thermoplastic - Non Metallic
- Compact & Lightweight
- Low Power Consumption
- High Resistance to Chemicals
- Aerodynamic Flow Passages
- Quick-Change Valve System
- 1/4" or 6mm Integral Push-In Fittings
- Pre-Wired Serial (15 or 25 Pin) Manifold Socket
- No Tools or Lubrication Needed
- Optional Separate Main & Air Pilot Air Feed
- Mount Free Standing, DIN Rail or Panel
- CSA/CE Listed

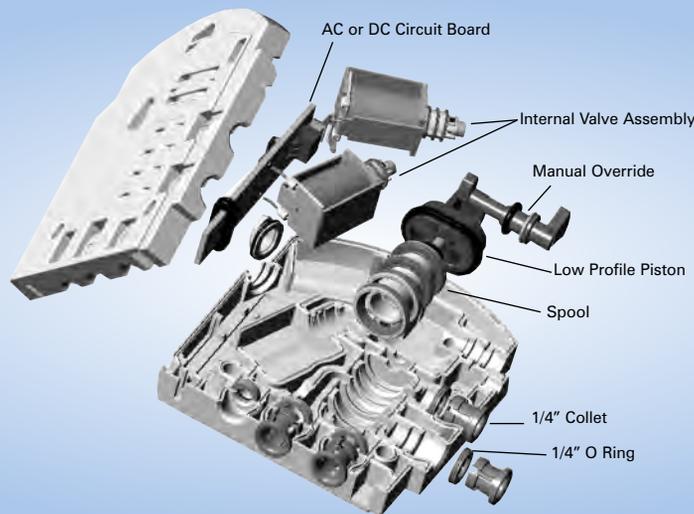


"Half Shell" Design

The heart of the *Isonic*® concept is its patented "Half Shell", design. Composed of two mirror image halves, *Isonic*® allows its flow channels and internal component compartments to be designed directly into these molded body sections. Assembly is achieved by simply inserting the various valve elements into their corresponding "half-shell" pockets. Internal components are easily positioned to make optimal use of space. The valve is completed by ultrasonically welding the two valve segments, creating a strong bond and hermetic seal. This design totally eliminates the need for fasteners, adhesives, gaskets and inserts.

Maximum Air Flow

Instead of the angular passages of most conventional valves, *Isonic*® internal channels are aerodynamically shaped for maximum air flow and minimal internal friction. Eliminating sharp corners and abrupt changes in direction reduces air turbulence and energy loss. Normally round air passages are replaced by thin, deep, tape-like channels that conserve space and optimize air flow.



De-Energize

Rugged Construction


Molded from a high performance thermoplastic, *Isonic*® is listed with CSA, making this system suitable for many environments.

The 2 Second Push-On Manifold and Valve System

The *Isonic*® MOD 3 manifold system has been designed to virtually eliminate downtime, eliminating all end plates, screws, o-rings and gaskets customarily found in manifold systems. With this "plug-in" design, replacing an individual valve can be accomplished in seconds - simultaneously making an electrical and pneumatic connection, without the aid of any tools!

The *Isonic*® valve series can naturally be implemented as either part of a manifold system or stand alone and have option of either internal or external pilot pressure.

To Remove Valve Press Manifold Release



To Install simply Push Valve onto Manifold


Edge connector requires no wiring and the Valve Ports need no fittings, the MOD 3 modular system is engineered to Push-On, saving time and money on traditional installation.

Versatile

Available in four or eight station segments, the *Isonic*® MOD 3 manifold's unique modular design creates a versatile, expandable control base. The *Isonic*® MOD 3 manifold will accept any combination of different function valves. For larger manifolds, two or more segments can be easily combined to fulfill any needs. The manifold has separate mains and pilot air feed and also allows easy isolation of segments for applications with differential pressures.

Edge Connector

The Slot-In electrical Edge Connector reduces the time and expense needed for wiring and connectors.

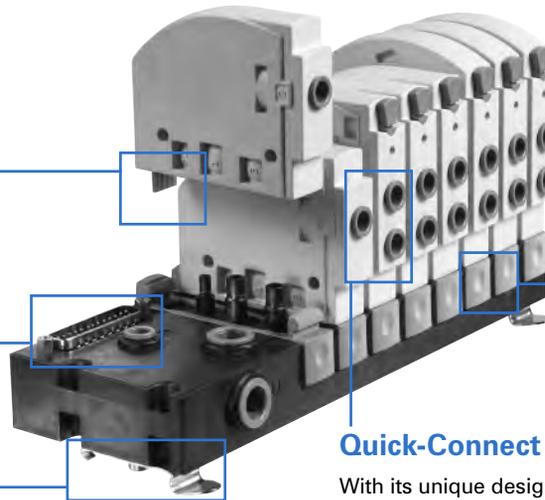

Manifold Release

Press to Release valve from manifold.

Quick-Connect Collets - No Fittings Needed

With its unique design *Isonic*® MOD 3 eliminates the need for tube fittings. Built-in, push-to-connect collets allow for fast and easy tube and manifold connections.

Panel or DIN Rail Mounting

Panel Mounted with front or rear screws and can also be DIN rail mounted with clips.


Simplify Wiring Tasks With Prewired Connector and Cable

To further reduce set-up time and installation costs, the *Isonic*® MOD 3 manifold is prewired to accept a single connection. An integrated P.C.B. connects each of the manifold's valve stations. Simply plug in a standard cable to the Sub D connector for quick, clean wiring. A single connector can supply wiring for up to 8 (single or double pilot) valves.

Valve Data

Product / Function	Flow (C _v)	Pressure Range	Vacuum	Orifice Size	Tubing
2/2 Direct Acting or 3/2 Direct Acting	A: 0.03	0-120 PSI (0-8.3 Bar)	Full	A: 0.04 (1.0 mm)	ALL MODELS 1/4" (6mm) O.D. Ports 1, 2, 3, 4 5/32" (4mm) Port 14 Optional
	B: 0.06	0-100 PSI (0-6.9 Bar)	Full	B: 0.06 (1.5 mm)	
	C: 0.11	0-90 PSI (0-6.2 Bar)	Full	C: 0.08 (2.0 mm)	
4/2 Single Solenoid Pilot Operated	0.80	30-100 PSI (2.0-8.3 Bar)	Full with External Pilot	0.21" (5.3 mm)	
4/2 Double Solenoid Pilot Operated	0.80	15-100 PSI (1.0-8.3 Bar)	Full with External Pilot	0.21" (5.3 mm)	

General	
Temperature Range :	0 ^o - 120 ^o F (-18 ^o C to + 50 ^o C)
Media:	Air or Inert Gas
Lubrication:	Not Recommended
*Filtration:	Coalescing Filter
Duty:	100%
Manual Override:	Standard (Pilot Models)
Collets:	1/4" (6 mm) and 5/32" (4mm)
Voltages:	DC: 12 V and 24 V AC: 24 V, 110 V @ 50 / 60 Hz
Seals:	Viton® and Nitrile
Body:	GE Thermoplastic
Response Time:	10 ms On; 35 ms Off

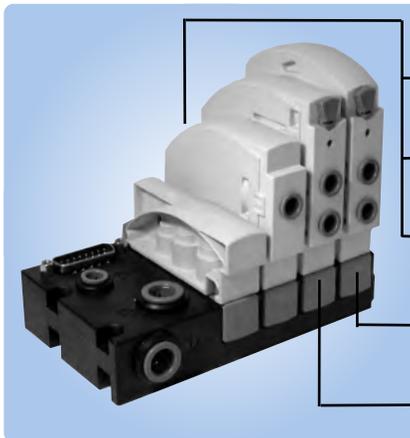

Valve Symbols	
	2/2 NC
	3/2 NC
	3/2 NO
	4/2 Double Solenoid
	4/2 Single Solenoid

* Recommended to protect the environment and valve system from potential aggressive synthetic oils


Solenoid Data

Direct Acting


Voltage	Amps	Resistance	Initial Power	100% Duty
12DC	0.169	71 Ω	2.00 W	1.50 W
24DC	0.071	305 Ω	1.70 W	1.28 W
24AC	0.071	305 Ω	1.70 W	1.28 W
110AC	0.016	7143 Ω	1.75 W	1.31 W

Pilot Operated

Amps	Resistance	Initial Power	100% Duty
0.133	92 Ω	1.60 W	1.30 W
0.058	500 Ω	1.60 W	1.20 W
0.058	500 Ω	1.40 W	1.20 W
0.001	8350 Ω	1.70 W	1.50 W

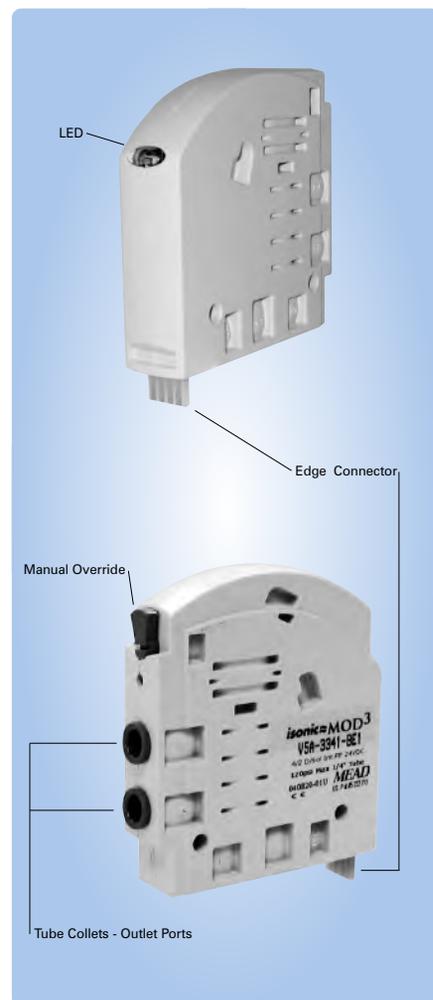

Track Side Valve P. C. B. Edge Connector



Pin (View from track side)	Single and Direct Acting Solenoid	Double Solenoid	Signal LED Color
Right	Not Used	+VE Signal Port 1 > 2	Green
Left	+VE Signal	+VE Signal Port 1 > 4	Yellow
Center Right	Ground (0V)	Ground (0V)	-
Center Left	Ground (0V)	Ground (0V)	-

DIN Connector - IP 65



Pin No.	Single and Direct Acting Solenoid	Double Solenoid
1	Ground (0V)	+VE Signal Port 1 > 2
2	+ VE Signal	+VE Signal Port 1 > 4
3	Not Used	Ground (0V)
Earth	Not Used	Not Used

NOTE (DIN Style): Connector P5D1 is shown with valve above. The connector is not included with valve.

Valve Mini-Quick Connector



Pin (View connector side)	Single and Direct Acting Solenoid	Double Solenoid	Wire Color
Right	Ground (0V)	+VE Signal Port 1 > 2	Black
Left	+VE Signal	+VE Signal Port 1 > 4	Red
Center	Ground (0V)	Ground (0V)	White

NOTE (All): Consult Mead for reversed polarity models.

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index

2/2 & 3/2 Valves

V 3 A - B 1 3 1 - B E 1

Product Category

V = Valve

Family

3 = Isonic MOD 3 (2-way; 3-way)

Tube Size

A = 1/4" O.D. Tube Collet
B = 6mm O.D. Tube Collet

Orifice Size

A = 0.040" (1.0mm) Vacuum to 120 PSI (8.3 bar)
B = 0.060" (1.5mm) Vacuum to 100 PSI (6.9 bar)
C = 0.080" (2.0mm) Vacuum to 90 PSI (6.2 bar)

Actuation Type

1 = Normally Closed
2 = Normally Open (N/A in orifice size C)



LED (Standard)

Connector

E = Edge Connector (Manifold)
W = Mini Quick Connect*
X = 8mm micro DIN Connector (Type C)

Solenoid Voltage

A = 12 DC
B = 24 DC
D = 24 50/60 Hz AC
F = 110 50/60 Hz AC*
* 110 volt model is not available with mini quick connect (option W)

Supply Connections

1 = Main Supply (Port 1)
2 = Alternate Supply (Port 14)**

Flow Pattern

2 = 2-Way (N.C. Only)
3 = 3-Way
V = Vacuum

** Used to supply alternate pressure to select valves on the same manifold.

4/2 Valves

V 5 A - 37 4 1 - B E 1

Product Category

V = Valve

Family

5 = Isonic MOD 3 (4 way)

Tube Size

A = 1/4" O.D. Tube Collet
B = 6mm O.D. Tube Collet

Actuation Type

37 = Solenoid spring
33 = Double solenoid



LED (Standard)

Connector

E = Edge Connector (Manifold)
W = Mini Quick Connect*
X = 8mm micro DIN Connector (Type C)

Solenoid Voltage

A = 12 DC
B = 24 DC
D = 24 50/60 Hz AC
F = 110 50/60 Hz AC*
* 110 volt model is not available with mini quick connect (option W)

Pilot Connections

1 = Internal Pilot Feed (Port 1)
2 = External Pilot Feed (Port 14)**

Flow Pattern

4 = 4/2
V = Vacuum

** Used to supply Pilot if main supply is less than 30 PSI.

Manifolds

M 5 A - 08 0 8 - 1 1

Product Category

M = Manifold

Family

5 = Isonic MOD 3

Tube Size

A = 3/8" O.D. Tube Collets (Common Air Inlet / Exhaust)
1/4" O.D. Tube Collets (Common Air Pilot Feed)
B = 10 mm O.D. Tube Collets (Common Air Inlet / Exhaust)
6 mm O.D. Tube Collets (Common Air Pilot Feed)

Number of Stations

04 = 4 Stations
08 = 8 Stations
(modular segments are combined for manifolds over 8 stations)



Accessories

0 = None
1 = 3/8" Exhaust Muffler
2 = 10mm Exhaust Muffler

Connector Cable

0 = No cable & Connector
1 = With 1.0m cable & Connector
3 = With 3.0m cable & Connector
5 = With 5.0m cable & Connector

Connector


4 = 4 station / 15 pin (Sub D)
8 = 8 station / 25 pin (Sub D)
0 = Grommet (Mini Quick and DIN)

Manifold Accessories

0 = Manifold only
1 = DIN rail clips mounted on manifold
2 = Manifold mounted on DIN rail

General Information

Flow Connections 120 PSI (8.3 Bar)			Electrical Connections	Mounting Options
Supply (Port 1)	Exhaust (Port 3)	Pilot (Port 14)	Sub-D Type	Panel Foot Mounting
A=3/8"	A=3/8"	A=1/4"	15 Pin =	Panel Rear Mounting
B=	B=	B=	25 Pin =	35mm DIN Rail w/ Optional Kit
10mm	10mm	6mm	8 Valve Station	

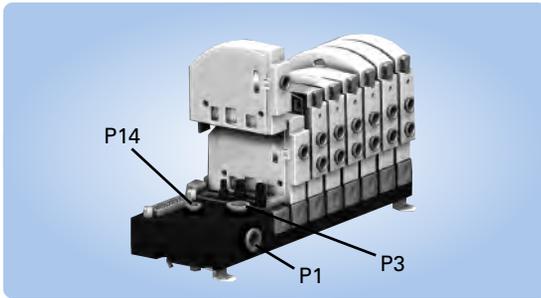


Manifold Sub-D Connections

15 Pin +VE Signal

25 Pin +VE Signal

Valve Station No.	1	2	3	4	Valve Station No.	1	2	3	4	5	6	7	8
Valve Type	Pin Connection No.				Valve Type	Pin Connection No.							
Direct Acting Sol.	15	13	11	9	Direct Acting Sol.	11	13	24	22	20	18	16	14
Single and Double Sol. Pilot 1 > 4	15	13	11	9	Single and Double Sol. Pilot 1 > 4	11	13	24	22	20	18	16	14
Double Sol. Pilot Port 1 > 2	8	14	12	10	Double Sol. Pilot Port 1 > 2	10	12	25	23	21	19	17	15

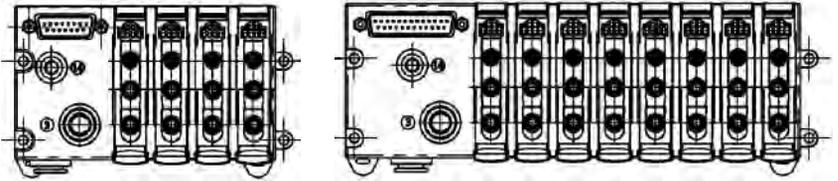


Valve Station No.	All	Valve Station No.	All
Common	1, 2, 3, 4	Common	1, 2, 3, 4, 5, 6, 7, 8

NOTE: Valve 1 is located nearest to Serial Connector, Common Pins are connected internally.

Wiring / 15 & 25 PIN Detail - Cable End (Colors Indicated apply to Mead accessories P(*)-15SSDC and P(*)-25SSDC)


Numbers near pin lines are the pin numbers. Center information refers to usage (see detailed explanation). Colors indicated on the outside are the wire color of the Mead accessories.

15 Pin Sub-D Connector (4 Station Manifold Only)

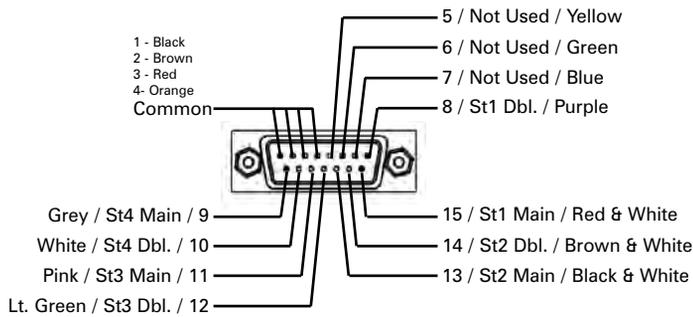

Detailed Explanation: St1 Main = Station 1, Main connection (Used for all valves installed here). St1 Dbl. = Station 1, Double Solenoid Connection (The second connection for a double solenoid type valve - This is only used for the double solenoid type. Remember double solenoids have two connections.)

25 Pin Sub-D Connector (8 Station Manifold Only)

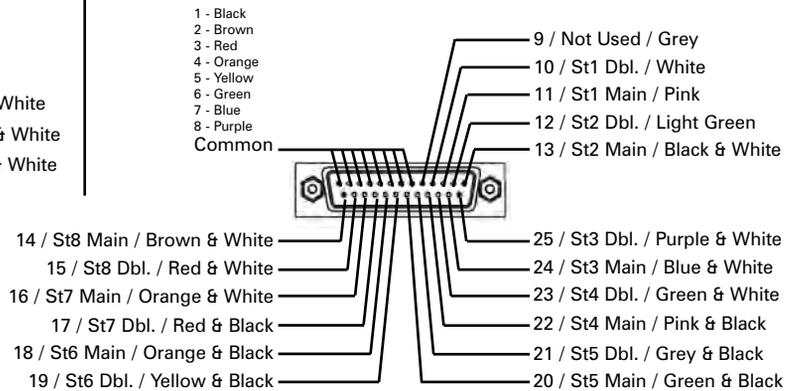


NOTE: All Commons are connected internally on both the 4 and 8 Station Manifolds. 28 AWG wire.

Accessories

Electrical Connectors	Model No.
8 mm DIN Connector	P5D1
8 mm DIN w/ 39" Leads	P5D2
Quick-Connect Leads	P5Q1
Sub-D Connector 15 Pin	P5-15SD
Sub-D Connector 25 Pin	P5-25SD

Blocking Plugs	Model No.
Manifold Blocking Plug	P5MB
1/4" Port Plug	P1P1
6 mm Port Plug	P1P2

Sub-D Connector & Cable (for M5 Manifolds)	Model No.
1.0M (15 pin Sub D Connector Included)	P5-15SDC
3.0M (15 pin Sub D Connector Included)	P3-15SDC
5.0M (15 pin Sub D Connector Included)	P5-15SDC
1.0M (25 pin Sub D Connector Included)	P1-25SDC
3.0M (25 pin Sub D Connector Included)	P3-25SDC
5.0M (25 pin Sub D Connector Included)	P5-25SDC

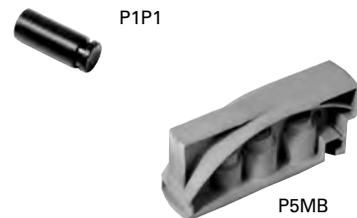


Manifold Accessories	Model No.
DIN Rail Mounting Clip Kit	P5MC
35 mm DIN Rail	P4M1-x*
35 mm DIN Rail End Stop	P4S1

* x = # of feet required

Exhaust Muffler	Model No.
1/4" Port (Push-In)	MMP-250
6 mm Port (Push-In)	MMP-006
3/8" Port (Push-In)	MMP-375
10 mm Port (Push-In)	MMP-010

Replacement Collets	Model No.
1/4" Tube Collet	P4C1
6 mm Tube Collet	P4C2
5/32" (4 mm) Tube Collet	P1C1
3/8" Tube Collet	P4CA
10 mm Tube Collet	P4CB


Valve Dimensions

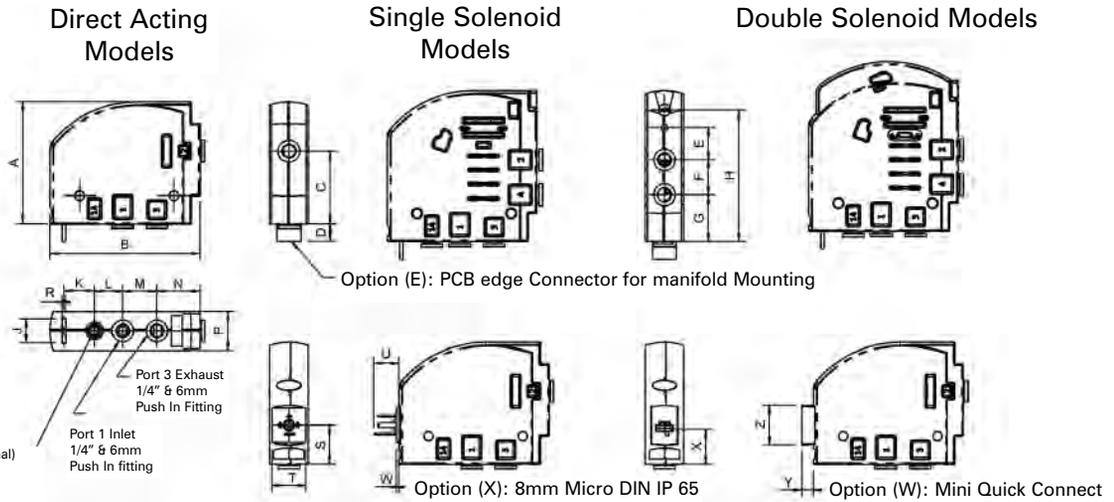

Valve	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	W	X	Y	Z
2/2 & 3/2	2.20 56.0	2.76 70.0	1.32 33.5	0.43 10.8	-	-	-	-	0.43 11.0	0.57 14.4	0.63 16.0	0.79 20.0	0.71 18.0	0.06 1.60	0.71 18.0	0.60 15.3	0.65 16.6	0.05 1.30	0.46 11.8	0.22 5.50	0.71 18.0	
4/2 Single Solenoid	2.72 69.0	2.76 70.0	-	0.43 10.8	0.59 15.0	0.63 16.0	0.85 21.5	2.37 60.3	0.43 11.0	0.57 14.4	0.63 16.0	0.79 20.0	0.71 18.0	0.06 1.60	0.71 18.0	0.60 15.3	0.65 16.6	0.05 1.30	0.46 11.8	0.22 5.50	0.71 18.0	
4/2 Double Solenoid	3.07 78.0	2.76 70.0	-	0.43 10.8	0.59 15.0	0.63 16.0	0.85 21.5	2.37 60.3	0.43 11.0	0.57 14.4	0.63 16.0	0.79 20.0	0.71 18.0	0.06 1.60	0.71 18.0	0.60 15.3	0.65 16.6	0.05 1.30	0.46 11.8	0.22 5.50	0.71 18.0	

Note: Sizes are in inches first, millimeters second (italicized).


Manifold Dimensions

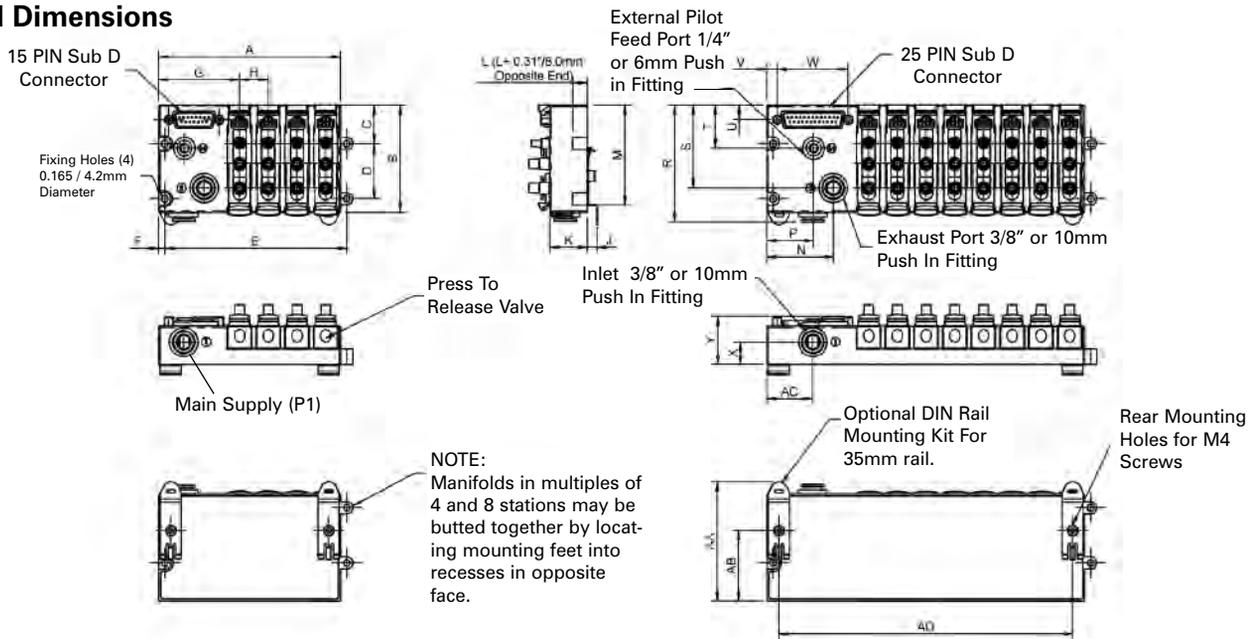

Manifold	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W	X	Y	AA	AB	AC	AD
4	4.74	2.76	0.35	1.42	4.74	0.16	2.10	0.75	0.26	0.98	0.39	2.56	1.18	0.67	2.87	2.13	1.10	0.37	0.26	1.32	0.57	1.21	3.07	1.81	0.67	4.11
Station	120.5	70.0	9.00	36.0	120.5	4.00	53.5	19.0	6.60	25.0	10.0	65.0	30.0	17.0	72.8	54.0	28.0	9.40	6.70	33.4	14.5	30.8	78.0	46.0	31.5	104.5
8	8.28	2.76	0.35	1.42	8.28	0.16	2.65	0.75	0.26	0.98	0.39	2.56	1.72	1.24	2.87	2.13	1.10	0.37	0.26	1.86	1.57	1.21	3.07	1.81	1.25	7.65
Station	210.3	70.0	9.00	36.0	210.3	4.00	67.3	19.0	19.0	25.0	10.0	65.0	43.8	31.5	72.8	54.0	28.0	9.40	6.70	42.1	14.5	30.8	78.0	46.0	31.5	194.3

Note: Sizes are in inches first, millimeters second (italicized).

Connector Dimensions

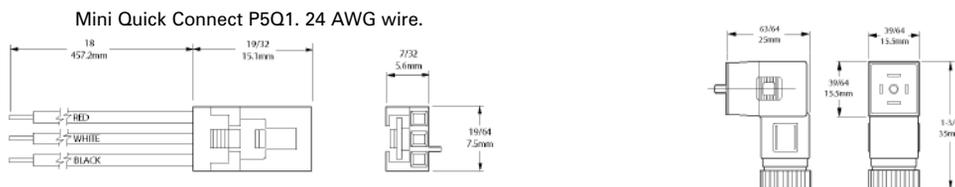

8mm Micro DIN P5D1



The Award-Winning "Half-Shell" Design

The heart of the Isonic® concept is its patented "half-shell" design. Composed of two mirror-image halves, Isonic® allows its flow channels and internal component compartments to be designed directly into these molded body sections. Valve bodies are molded of high-strength, glass-impregnated Ultem thermoplastic.

Assembly is achieved by simply inserting the various valve elements into their corresponding "half-shell" pockets. Internal components are easily positioned to make optimal use of space.

The valve is completed by ultrasonically welding the two valve segments, creating a strong bond and hermetic seal. This design totally eliminates the need for fasteners, adhesives, gaskets and inserts.

Revolutionary Valve Production

Isonic® technology eliminates all machining operations associated with valve manufacturing. Requiring only simple assembly, Isonic® can be produced quickly and easily with significant cost reduction.

Design Optimizes Valve Performance

Isonic® 2, 3 and 4-way valves feature a unique, multi-patented design that significantly shrinks valve size while boosting flow capacity. With its design and a state-of-the-art manufacturing process, Isonic® breaks through the restriction and limitations of conventional valve manufacturing.

Loaded with Standard Features

Along with its size and price advantages, Isonic® offers numerous user features, many of them standard. Most models feature an integral electronic board with surge suppression and LED. A variety of voltages and wiring options are available. This combination of price and versatility make Isonic® the perfect control choice for pneumatic systems.

New Patents

Patent #	Patented Property
5,222,715	"Half-Shell" Valve Construction
5,341,846	Plug-In Valve Stack Assembly

Additional Patents Pending

Faster Manifold Connections

The Isonic® manifold system has been designed to virtually eliminate downtime, eliminating all end plates, screws, o-rings and gaskets customarily found in manifold systems. Connecting any valve to the manifold base is as easy as plugging in an electrical cord. With this patented "plug-in" design, replacing an individual valve can be accomplished in seconds, without the aid of any tools!

Available in two, three, four or five station segments, the Isonic® manifold's unique modular design creates a versatile, expandable control base. For larger manifolds, two or more segments can be easily combined to fulfill any needs. Further, manifold segments are easily isolated for applications with differential pressures.

Quick-Connect Collets - No Fittings Needed

With its unique design Isonic® eliminates the need for tube fittings. Built-in, push-to-connect collets allow for fast and easy tube and manifold connections.

Resistant To Harsh Conditions

Molded from a high performance thermoplastic, Isonic® achieves superior heat, impact and chemical resistance. It is listed with both UL and CSA.

Maximum Air Flow

Instead of the angular passages of most conventional valves, Isonic's internal channels are aerodynamically shaped for maximum air flow and minimal internal friction. Eliminating sharp corners and abrupt changes in direction reduces air turbulence and energy loss. Normally round air passages are replaced by thin, deep, tape-like channels that conserve space and optimize air flow.

Isonic® V1 and V4 have earned UL recognition and have been tested to the standards of CSA and conforms to the applicable directives of the European Union.



Isonic® is a registered trademark of Mead Fluid Dynamics, Inc.

Specifications

Design :	Poppet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life:	50,000,000 cycles
Orifice Size:	A: 0.025" / 0.65mm B: 0.035" / 0.90mm C: 0.055" / 1.4mm
Flow:	A: 0.01 C _v B: 0.02 C _v C: 0.05 C _v
Maximum Pressure:	A: 120 PSI / 8.3 Bar B: 120 PSI / 8.3 Bar C: 30 PSI / 2.1 Bar
Vacuum:	to 28 in .Hg
Temperature Range:	0° - 120°F / 49°C
Tubing:	5/32" or 4mm
Mounting Holes:	0.156 diameter (1 hole, 1 slot)
Seals:	Viton® and Nitrile
Weight:	1.5 oz. (per valve)

Solenoid Data

Voltage	12DC	24DC	24AC	120 AC
Amps	0.133	0.058	0.058	0.014
Resistance	92Ω	406Ω	406Ω	8350Ω
Initial Power	1.6	1.4	1.4	1.7
Continuous On	1.3	1.2	1.2	1.5

Response Time: 10 milliseconds

Molex Connector: UL and CSA Listed

Din Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications

Manifold

Common Air Inlet: Built-in, push-in fittings for 1/4" OD or 6mm tubing both ends

Foot Mounting: 4 slots, 11/64" diameter

DIN Rail Mounting: Attaches to 15mm DIN rail


Valve Symbols:




Dimensions



Valves:

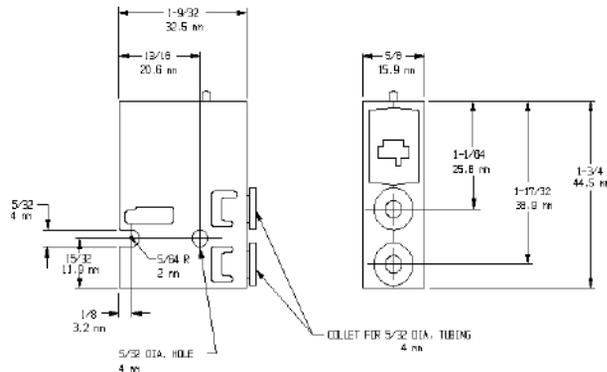

Manifolds

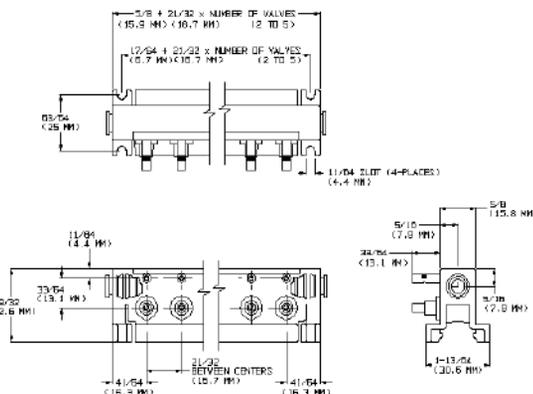

Accessories



P1SA1



P1SA2



P1Q1

NOTE: (1) pc. is included with each "W" type valve. 24 AWG wire.



MM-019

Muffler shown here on V1 Valve with T1 option

How To Order

V 1 B 04 - A W 1 - ()**

Product Category

V = Valve

Family

1 = Isonic® 1000 (2-way; 3-way)

Orifice Size

A = 0.025" (0.6mm)

B = 0.035" (0.9mm)

C = 0.055" (1.2mm)

Flow Pattern

02 = 2-Way Normally Closed

04 = 3-Way Normally Closed

05 = Vacuum (3-Way) Normally Closed

06 = Vacuum (2-Way) Normally Closed

Options

T1 = Tapped Exhaust (10-32)

T2 = Tapped Exhaust (M5x0.80)

LED

0 = No LED

1 = LED (not available with connector Z)

Connector

W = Mini Quick Connect
(with electronic board)

X = 8mm micro DIN (with board)
connector not included

Y = Flying Lead (with board)

Z = Flying Lead
(no board - DC only)

Solenoid Voltage

A = 12 DC

B = 24 DC

D = 24 50/60 Hz AC

F = 120 50/60 Hz AC

Manifolds:

M 1 04 - J 0 - ()**

Product Category

M = Manifold

Family

1 = Isonic® 1000 (2-Way; 3-Way)

Number of Stations

02 = 2 Stations

03 = 3 Stations

04 = 4 Stations

05 = 5 Stations

N = N Stations (modular segments are combined for manifolds over 5 stations)

Options

A = Aluminum Manifold

Manifold Assembly

0 = Manifold Only

2 = Assembled Manifold on DIN rail

Common Air Inlet (Both Ends)

J = Push in fitting for 1/4" O.D. tubing

K = Push in fitting for 6mm tubing

Accessories:

Electrical Connectors

8mm Micro DIN Connector P1D1

8mm Micro DIN Connector (molded, pre-wired) . P1D2 (Includes 39"/ 1m leads)

Mini Quick-Connect P1Q1 (includes 18"/ 45cm leads; contact factory for longer lengths)

Manifold Accessories

15mm DIN Mounting Rail P1M1-x (where x = desired number of feet of DIN rail)

15mm DIN Rail End Stops P1S1 (note: two required per manifold)

4mm (5/32) Manifold Blocking Plug P1B1 (for blocking empty manifold stations)

1/4" Manifold Inlet Port Plug P1P1 (one included with each manifold)

6mm Manifold Inlet Port Plug P1P2 (one included with each manifold)

Miscellaneous

10-32 Muffler MM-019 (to silence exhaust in 10-32 exhaust port)

Port Adapter P1SA1 (converts 5/32" port to 1/4" barb OD tube)

Port Adapter P1SA2 (converts 5/32" port to 1/4" push-to-connect OD tube)

See additional accessories on page 17

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices


Accessories

Index


Dimensions



Valves

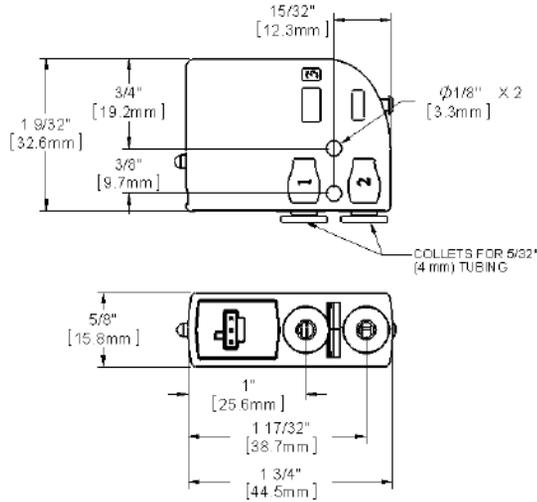

Manifolds

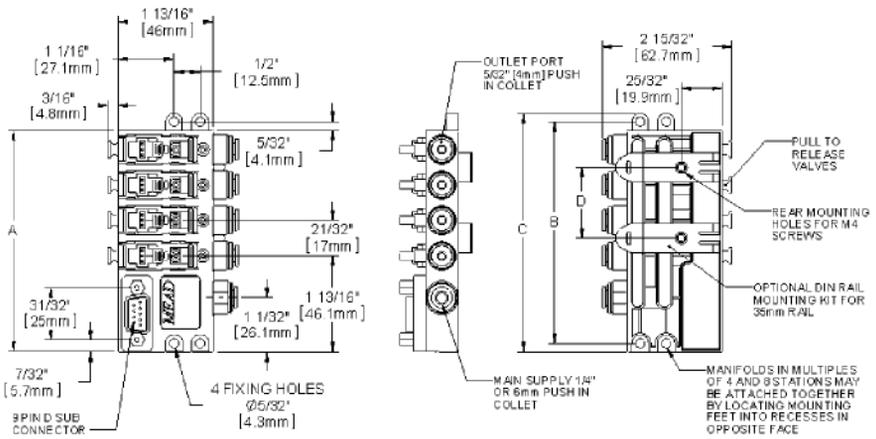


Manifold	A	B	C	D
4	4-3/16	4-3/16	4-1/2	1-11/32
Station	[106.3]	[106.3]	[114.3]	[34]
8	6-7/8	6-7/8	7-13/32	4-1/32
Station	[174.3]	[174.3]	[188.3]	[102]


Note: Dimensions in inches [mm]

First numbers are the pin numbers. Center information refers to station. Colors are the wire color of Mead accessories

9-Pin Sub-D Connector
(4 Station Manifold Only)



9-Pin Sub-D Connector
(8 Station Manifold Only)

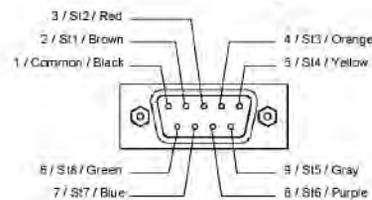

Specifications—Normally Closed Version


Design :	Poppet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life*:	50,000,000 cycles
Orifice Size:	A: 0.025" / .65mm B: 0.035" / .90mm C: 0.055" / 1.40mm
Flow:	A: 0.01 C _v B: 0.02 C _v C: 0.05 C _v
Maximum Pressure:	A: 120 PSI / 8.3 Bar B: 120 PSI / 8.3 Bar C: 30 PSI / 2.1 Bar
Vacuum:	To 28 in Hg
Temperature Range:	0°F to 120°F / -18°C to +49°C
Tubing:	5/32" or 4mm
Mounting Holes:	0.156" diameter (2 holes)
Seals:	Viton® and Nitrile
Weight:	1.5 oz. (per valve)

Specifications—Normally Open Version

Design :	Poppet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life*:	10,000,000 cycles
Orifice Size:	B: 0.035" / 0.90mm C: 0.055" / 1.40mm
Flow:	B: 0.02 C _v C: 0.05 C _v
Maximum Pressure:	B: 90 PSI / 6.2 Bar C: 25 PSI / 1.6 Bar
Vacuum:	To 28 in Hg
Temperature Range:	0°F to 120°F / -18°C to +49°C
Tubing:	5/32" or 4mm
Mounting Holes:	0.156" diameter (2 holes)
Seals:	Viton® and Nitrile
Weight:	1.5 oz. (per valve)

* Tested under typical industrial operating conditions; for extended operation at environmental extremes (temperature, etc.) consult Mead.

Valve Symbols



Solenoid Data

Voltage	12DC	24DC	24AC	120 AC
Amps	0.133	0.058	0.058	0.014
Resistance	92Ω	406Ω	406Ω	8350Ω
Initial Power	1.6W	1.4W	1.4W	1.7W
Continuous On	1.3W	1.2W	1.2W	1.5W

Response Time: 10 milliseconds

Molex Connector: UL and CSA Listed

DIN Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications

Manifold

Common Air Inlet: Built-in, push-in fittings for 1/4" OD or 6mm tubing

Rear Mounting: 2 Holes for M4 screws

DIN Rail Mounting: Attaches to 35mm DIN Rail

Accessories



P2B1



P4M1-x



P5-09SCD



P1SA1



P1SA2



P1Q1

NOTE: (1) pc. is included with each "W" type valve. 24 AWG wire



P4S1

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index

How To Order

Valves:

V 2 B 04 - B Z 0 - T1

Product Category

V = Valve

Family

2 = Isonic® 2000

Orifice Size

A = 0.025" (0.6mm) (only available on NC)

B = 0.035" (0.9mm)

C = 0.055" (1.4mm)

Flow Pattern

02 = 2-Way Normally Closed

03 = 3-Way Normally Open

04 = 3-Way Normally Closed

05 = Vacuum (3-Way) Normally Closed

06 = Vacuum (2-Way) Normally Closed

07 = Vacuum (3-Way) Normally Open

Options

T1 = Tapped Exhaust (10-32)

T2 = Tapped Exhaust (M5x0.80)

LED

0 = No LED (only available with connector Z)

1 = LED standard (not available with connector Z)

Connector

W = Mini Quick Connect (with electronic board) Required for Manifold

X = 8mm Micro DIN (with board)

Connector not included

Y = Flying Lead (with board)

Z = Flying Lead (no board - DC only)

Solenoid Voltage

A = 12 DC

B = 24 DC

D = 24 50/60 Hz AC

F = 120 50/60 Hz AC

Manifolds:

M 2 B 08 1 5

Product Category

M = Manifold

Family

2 = Isonic® 2000

Inlet Tube Size

A = 1/4" OD Tube Collets

B = 6mm OD Tube Collets

Options

0 = No cable or connector

5 = With 5.0m cable and connector

Manifold Accessories

0 = Manifold only

1 = DIN Rail clips mounted on Manifold

2 = Manifold mounted on DIN Rail

Number of Stations

04 = 4 Station

08 = 8 Station

Note: Outlet tube size is 5/32" (4mm) OD Tube Collet

Accessories:

Electrical Connectors

8mm Micro DIN Connector P1D1

8mm Micro DIN Connector (molded, pre-wired). . P1D2

Mini Quick-Connect P1Q1

(includes 39"/ 1m leads)

(includes 18"/ 45cm leads; contact factory for longer lengths)

Manifold Accessories

35mm DIN Mounting Rail P4M1-x (where x = desired number of feet of DIN Rail)

35mm DIN Rail End Stops P4S1 (note: two required per Manifold)

Manifold Blocking Plug P2B1 (for blocking empty Manifold stations)

5.0m Cable and 9 Pin Connector P5-09SDC

Miscellaneous

10-32 Muffler MM-019 (to silence exhaust in 10-32 exhaust port)

Port Adapter P1SA1 (converts 5/32" port to 1/4" barb OD tube)

Port Adapter P1SA2 (converts 5/32" port to 1/4" push-to-connect OD tube)

Reference

Control Valves


Cylinders

Specialty Valves

Production Devices

Accessories

Index

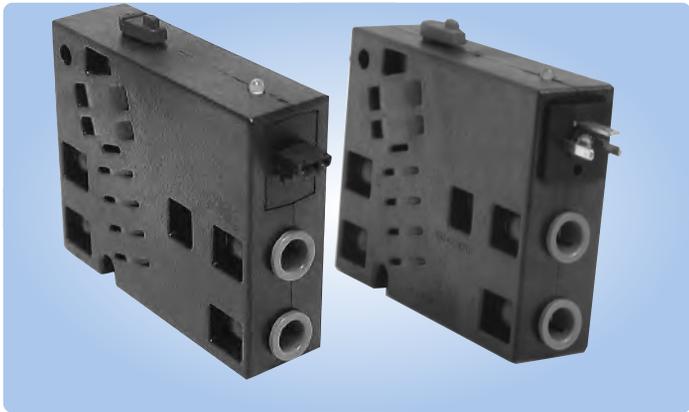

Isonic® Control Valves

While only 20 mm in width, these 2 position spool valves provide a surprisingly high flow ($C_v=0.8$). With its thin, aerodynamic flow passages, Isonic® maintains a higher flow in a smaller area. The pilot piston features an innovative oval design to further facilitate a compact, low-profile power valve.

Versatile Mounting

With a hole and a slot molded into its body, Isonic® valves may be mounted flush to any flat surface. Mounting brackets are also available for individual surface or DIN rail mounting.

Solenoid Data

Voltage	Amps	Resistance	Initial Power	Continuous On
12DC	0.133	92	1.6	1.3
24DC	0.058	406	1.4	1.2
24AC	0.058	406	1.4	1.2
120AC	0.014	8350	1.7	1.5

Specifications	
Design:	Spool (2-Position)
Ports :	1/4" OD tube collet or 6mm OD tube collet
Pilot Ports :	3/32" (4mm) OD tube collet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 micron
Cycle Life:	20,000,000 (minimum)
Orifice Size:	0.2" (5.0mm)
Flow:	0.8 C_v
Vacuum:	Air pilot models can be used in vacuum applications with external air signal to pilot ports
Minimum Pressure:	30 PSI (2 Bar)
Maximum Pressure:	120 PSI (8.3 Bar)
Temperature Range:	0° - 120°F (-18°C - 49°C)
Mounting Holes:	0.177" (4.5mm) diameter (1 hole, 1 slot)
Weight:	Solenoid models 3.1 oz each Air Pilot models 2.1 oz each

Materials

Body GE thermoplastic
Seals Fluorocarbon and Nitrile


Electrical

Voltagess DC: 12, 24
. AC: 24, 110/120
Leads 18" standard - 24 AWG wire
Duty Cycle Continuous duty
Response Time 16 milliseconds @ 100 PSI
Serial Interface 10-pin flat cable connector
Manual Override Standard (solenoid models)



Din Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications




Pressure Piloted Models

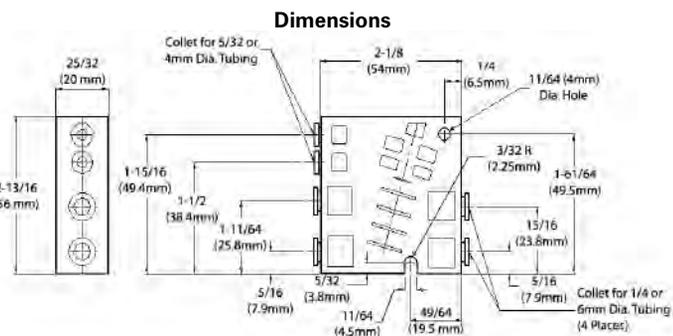

Function




Symbol




* Arrow Indicates Pressure applied to Pilot Port
1.....Air Supply 2.....Cylinder
3.....Common Exhaust 4.....Cylinder



Solenoid Models

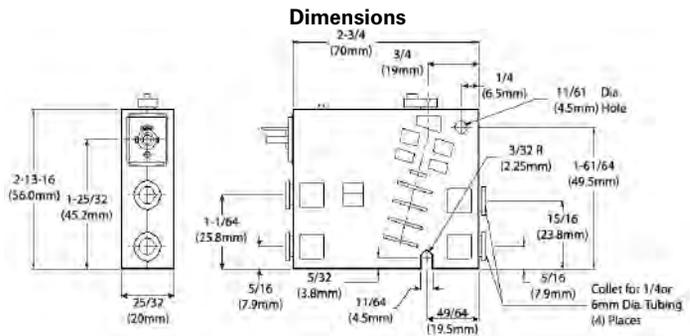

Function



Symbol



1.....Air Supply 2.....Cylinder
3.....Common Exhaust 4.....Cylinder

The Quick-Change Manifold

The Isonic® manifold system has been designed to virtually eliminate downtime. Connecting any valve to the manifold base is as easy as plugging in an electrical cord. With this patented "plug-in" design, replacing an individual valve on the manifold can be accomplished in a matter of seconds!

Isonic® Manifold Expands With Your Needs


Available in two, three or four station segments, the manifold's unique modular design creates a versatile, expandable control base. For manifolds larger than four stations, two or more segments can be easily combined to create any size manifold (multiple segments are assembled on DIN rail and secured with end stops). Manifold segments are easily isolated for applications with differential pressures.

Mounting Options

The Isonic® manifold can be either foot mounted or DIN rail mounted. 35mm DIN rail can be ordered from Mead.

Manifold Specifications

- Common Air Inlet Both ends: built in collets for 3/8" OD (or 10mm) tubing
- Foot Mounting 0.177 (4.5 mm) diameter
- DIN Rail Mounting Attaches to 35 mm DIN rail

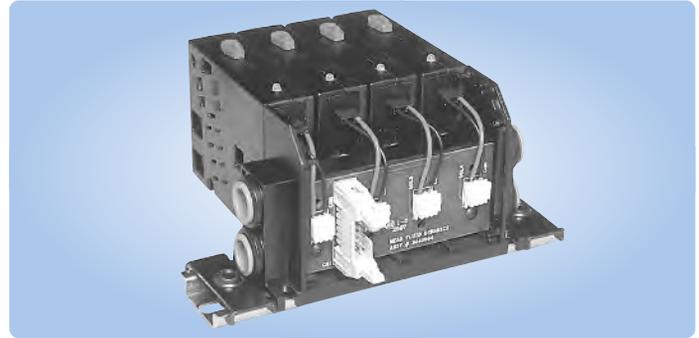


Simplify Wiring Tasks With Cable Connector

To further reduce set-up time and installation costs, the Isonic® manifold can be prewired to accept a single connection. With this option, a printed circuit board connects each of the manifold's valve stations. Simply plug in a standard flat-cable ribbon to the 10-pin connector for quick, clean wiring. A single connector can supply wiring for up to 8 valves. A second cable connector is necessary for manifolds of more than 8 valves.



Pre-wired manifolds are supplied with a protective cover. The cover snaps easily into place to protect the wiring and circuit board. It is easily removed for servicing or replacing a valve.

V4 Manifold Dimensions

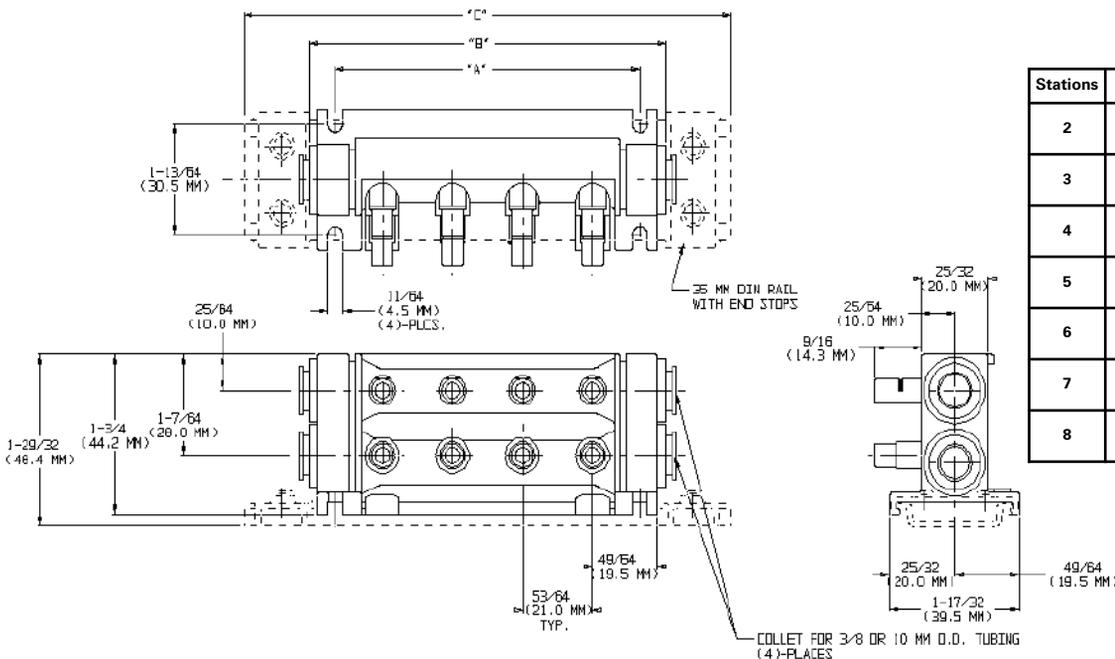

Stations	"A"	"B"	"C"
2	1-61/64 (49.5 mm)	2-35/64 (64.7 mm)	4-9/64 (105 mm)
3	2-25/32 (70.5 mm)	3-3/8 (85.6 mm)	4-15/16 (125 mm)
4	3-39/64 (91.5 mm)	4-13/64 (106.7 mm)	5-49/64 (146 mm)
5	5-9/64 (130.5 mm)	5-57/64 (145.6 mm)	7-19/64 (185 mm)
6	5-31/32 (151.5 mm)	6-9/16 (166.7 mm)	8-1/8 (206 mm)
7	6-51/64 (172.5 mm)	7-25/64 (187.7 mm)	8-61/64 (227 mm)
8	7-5/8 (193.5 mm)	8-7/32 (208.7 mm)	9-25/32 (248 mm)

How To Order

Valves:

V 4 A 0307 - A W 1 - ()****Product Category**

V = Valve

Family

4 = Isonic 4000 (4-way)

Collet Size

A = 1/4" O.D. Tube Collet

B = 6mm O.D. Tube Collet

Actuator Type

0507 = Single Air Pilot, Spring Return

0505 = Double Air Pilot

0307 = Single Solenoid, Spring Return

Options

V = Pilot Breather Vent Filter

LED

0 = (only available with connector Z)

1 = LED(not available with connector Z)

Connector

0 = None (pressure models)

W = Mini Quick Connect (w/board)

X = 8mm micro DIN Connector (w/board)

Y = Flying Lead (with board)

Z = Flying Lead (no board - DC only)

Solenoid Voltage

0 = None (pressure models)

A = 12 DC

B = 24 DC

D = 24 50/60 Hz AC

F = 110 / 120 50/60 Hz AC

Manifold:

M 4 A 03 - 2 Y**Product Category**

M = Manifold

Family

4 = ISONIC 4000 (4-way)

Collet Size

A = 3/8" O.D Tube Collets (Common Air Inlet)

B = 10mm O.D. Tube Collets (Common Air Inlet)

Number of Stations

02 = 2 Stations

03 = 3 Stations

04 = 4 Stations

N = N Stations

(modular segments are combined for manifolds over 4 stations)

Wiring Options

N = None

Y = Pre-wired 10-pin ribbon connector*
(wiring cover included)

C = Manifold with wiring cover

* Pre-wired manifolds not available with
DIN connector valves.**Manifold Assembly**

0 = Manifold Only

2 = Manifold Mounted on DIN rail
(required for 5 or more stations)

Accessories

Electrical Connectors

- 8mm Micro DIN Connector P1D1
- 8mm Pre-wired DIN Connector (includes 39" leads) . . P1D2
- Mini Quick-Connect (includes 18" leads) P1Q1

Mounting Brackets (For 4-Way Valves Only)

- Single Valve Mounting Bracket P4SM
- Single Valve DIN Rail Mount P4DM

Port Adapter (For 5/32" Ports)

- Converts Port to Barb for 1/4" OD Tube P1SA1
- Converts Port to Push-in Fitting (1/4" OD Tube) P1SA2

DIN Rail & Manifold End Stops

- 15mm DIN Rail (x = # of feet required) P1M1-x
- 35mm DIN Rail (x = # of feet required) P4M1-x
- 15mm Rail End Stop P1S1
- 35mm Rail End Stop P4S1

10-Pin Connector & Ribbon Cable (For Pre-Wired Manifolds)

- Connector w/ 1.0 meter leads P4RC10
- Connector w/ 1.5 meter leads P4RC15
- Connector w/ 3.0 meter leads P4RC30

Manifold Station Blocking Plugs & Port Plugs

- 5/32" (4mm) Station Plug (for empty manifold stations) . P1B1
- 1/4" Station Plug (for empty manifold stations) P4B1
- 6mm Station Plug (for empty manifold stations) P4B2
- 1/4" Port Plug P1P1
- 6mm Port Plug P1P2
- 3/8" Port Plug P4P1
- 10mm Port Plug P4P2

Miscellaneous Accessories

- Valve Locking Clip (locks 2 valves in place) P4LC-2
- (locks 3 valves in place) P4LC-3
- (locks 4 valves in place) P4LC-4
- Manifold Valve ID Strip (50 #s per strip) P4ID

Tube Collets (For Replacement Only)



- For 1/4" Port P4C1
- For 6mm Port P4C2
- For 3/8" Port P4CA
- For 10mm Port P4CB

Push-In Exhaust Mufflers


- For 1/4" Port MMP-250
- For 6mm Port MMP-006
- For 3/8" Port MMP-375
- For 10mm Port MMP-010

Wiring Connector Dimensions


Mini Quick-Connect - 24 AWG wires

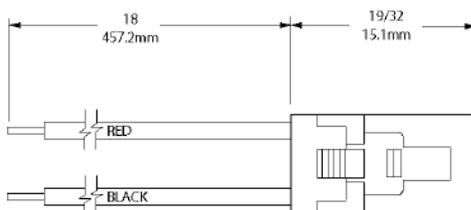

8mm DIN Connector



Mounting Bracket (P4DM)

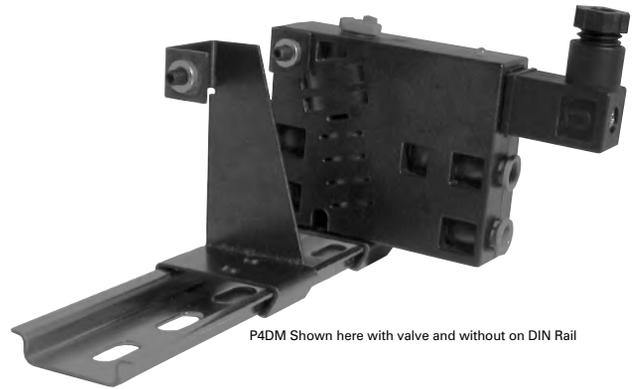

P4DM Shown here with valve and without on DIN Rail

Manifold Accessories



P4B1

Collets




P4C1 & P4CA



P4LC-4

Valve Identifiers (P4ID)

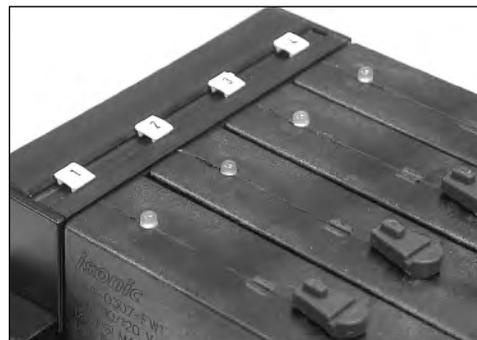

Single and Double Air Piloted

N1-SP
N2-SPN1-DP
N2-DP

Single and Double Solenoid

N1-SCD
N2-SCDN1-DCD
N2-DCDSolenoids shown here with
PVD1 (sold separately)

Designed For Long Life

Nova 4-way directional control valves offer state-of-the-art air valve design at a remarkably low price. Nova utilizes a single bonded rubber spool with finely ground sealing lands that travel only .047" ...less than 1/16 th of an inch! This economy of movement assures long valve life yet generates enough flow to power a 4" bore cylinder.

Large Air Flow With Dual Exhausts

1/4" NPTF ported Nova valves produce a large output flow of 57 cubic feet per minute at 100 PSI inlet pressure ($C_v=1.0$). Each output port has its own exhaust port so that individual exhaust control is possible.

Manual Override as Standard

All Nova valves are supplied with manual overrides so that valve actuation may be triggered without electricity or air to the pilots.

External Air Supply to Solenoid (E)

For solenoid actuation below the stated minimum pilot pressure or for vacuum applications, a 10-32 tapped external air supply allows the solenoid to be operated at different pressures than the power section.

Ordering Instructions

Single Valves: State model number and voltage, if applicable.

Stacked Valves: Add an "M" to the single valve model number and state voltage if applicable - specify number and type of valves in each stack. **Note:** Explosion proof coils may not be stacked next to each other because of their greater size.

External Pilot Supply: Add an "E" to the model number.

Isolator Discs: Specify isolator discs only if you will need to isolate valves within a stack.

Operating Parameters N1	Operating Parameters N2
Media: Air or Inert Gas	Media: Air or Inert Gas
Pressure: Vacuum to 120 PSI	Pressure: Vacuum to 120 PSI
Port Size: 1/8" NPTF	Port Size: 1/4" NPTF
Pilot Ports: 1/8" NPSF	Pilot Ports: 1/8" NPSF
Flow: $C_v = 0.7$ (single valves) $C_v = 0.9$ (stacked valves)	Flow: $C_v = 1.0$ (single valves) $C_v = 1.2$ (stacked valves)
Temperature: 0°F to 120°F	Temperature: 0°F to 120°F
Lubrication: Petroleum Base Oil	Lubrication: Petroleum Base Oil
Filtration: 40 Micron Minimum	Filtration: 40 Micron Minimum
Sol Response: 30-40 ms	Sol Response: 30-40 ms
Seals: Buna	Seals: Buna

Ordering Example:

NEW!

N1 = 1/8" ports
N1-SCD - M - 24VAC

Base Model _____
Stacking Option _____
Voltage _____

N2 = 1/4" ports
N2-SCD - M - 24VAC

Base Model _____
Stacking Option _____
Voltage _____

Nova Specifications

N1 Model	N2 Model	Actuator	Return	Description	Min. Pilot Pressure	Available Voltages		Wiring Type
						DC	AC	
N1-DP	N2-DP	Air Pilot	Air Pilot	Double Pressure Piloted	10PSI	-	-	-
N1-SP	N2-SP	Air Pilot	Spring	Single Pressure Piloted	40PSI	-	-	-
N1-DB	N2-DB	Bleed Pilot	Bleed Pilot	Double Bleed Piloted	40PSI	-	-	-
N1-HL	N2-HL	Hand Lever	Spring	Light 3lb. Touch	-	-	-	-
N1-PB	N2-PB	Push Button	Push Button	Detent	40PSI	-	-	-
N1-F4	N2-F4	Foot Pedal	Spring	Foot Valve w/Cover	-	-	-	-
N1-SCD*	N2-SCD*	Solenoid	Spring	DIN Connector Solenoid	40PSI	12-24	24-120-220-240	DIN*
N1-SX*	N2-SX*	Solenoid	Spring	Explosion Proof	40PSI	-	120	Conduit
N1-DCD*	N2-DCD*	Solenoid	Solenoid	DIN Connector Solenoids	10PSI	12-24	24-120-220-240	DIN*
N1-DX	N2-DX	Solenoid	Solenoid	Explosion Proof	10PSI	-	120	Conduit

* Connector not included on N2-SCD and N2-DCD. See "DIN Solenoid Connectors" on following page.

Double Push Button



N1-PB
N2-PB

Hand Lever




N1-HL
N2-HL

Foot Pedal



N1-F4
N2-F4

DIN Solenoid Connectors



A DIN connector (ordered separately) quickly attaches to the solenoid's prongs and is secured by a single screw.


Model PVD1



Mead offers 3 types of 12mm industrial B-type DIN connectors to facilitate connections to the solenoid. Model PVD1 is a connector with a 1/2" conduit entry and no lead wires. Model PVD2 also has a 1/2" conduit entry but includes 20" of cabled lead wire. Model PVD3 is a strain relief connector that includes 72" of cabled wire. See page 68.


Dimensions

Basic Top View




N1-HL & N2-HL


Models N1 & N2
SCD, DP, SP, DB, and PB




N1-SCD & N2-SCD (with connector)



Stacks



N2-F4

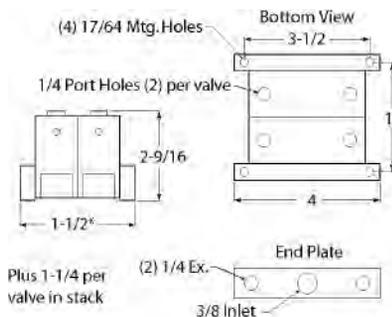


Stacking Options

If your application calls for the use of several valves, it is often advantageous to stack them. Because all valves within a stack are supplied air from a common source and are vented through common exhaust ports, plumbing time and fitting costs are greatly reduced.

Stacking also assures that your control valves are located centrally for more convenient trouble shooting and maintenance. Each stack valve body is attached only to its immediate neighbors so that valve additions, replacements, or deletions are easily achieved.

Flow Patterns




Single-actuated spring return models, including hand lever and foot pedal, have the inlet and Cyl. B ports connected when unactuated. On all double-actuated models, except (N1 or N2)-PB and (N1 or N2)-DB, signals at P1 cause output at Cyl. A and signals at P2 cause output at Cyl. B. On (N1 or N2)-PB and (N1 or N2)-DB models, the reverse occurs.

Easy To Repair


Nova valves are designed to permit complete replacement of all wearing parts in seconds without touching the piping or electrical wiring. All you need are a pair of snap ring pliers and a replacement spool.

Valve Symbols

N1-DP & N2-DP



N2-F4




N1-SP & N2-SP




N1-PB & N2-PB



N1-DB & N2-DB




N1-SCD & N2-SCD
N1-SX & N2-SX



N1-HL & N2-HL



N1-DCD & N2-DCD
N1-DX & N2-DX





C2-3
Single Air Piloted



C2-2R
3 Position, Double Air Piloted



C2-10H
Hand Valve

Sub-Base Mounted

Mead's Capsula valves work long and hard even when subjected to dirty air. Their unique patented bi-lobed seals are wear compensating, self cleaning, and are completely retained to prevent extrusion.

All models are mounted on a side ported sub-base, 4-way, 5 port. Any valve module may be separated from its base in seconds without disturbing the piping.

Ordering Instructions - State model number and voltage.

C2-4DCD - 120AC

Base Model _____

Voltage _____

General Specifications

Flow: 1/4" Models - $C_v = 0.75$ (45 SCFM at 100 PSI)

1/2" Models - $C_v = 3.17$ (190 SCFM at 100 PSI)

Max. Air Pressure: 120 PSI

Pilot Ports: 1/8" NPT

Filtration: 40 micron (extends valve life)

Lubrication: Required for 1/2" and all 3-position models

Response: 30-40 ms

Temperature: -20°F to +212°F

1/4" Materials: Module (ABS Cylolac) - Spool (Delrin AF®)
Base (Die cast Aluminum) ®Dupont Company

1/2" Materials: Module (Phenolic) - Spool (Aluminum)
Base (Rolled Aluminum)

Model Number	Port Size	Actuator	Return	Description	Min. Pilot Press. (PSI)	Available Voltages	
						DC	AC
C2-1	1/4	Air Pilot	Air Pilot	2-Position, Double Pressure Piloted	20	-	-
C5-1	1/2	Air Pilot	Air Pilot	2-Position, Double Pressure Piloted	20	-	-
C2-2H	1/4	Air Pilot	Spr. Center	3-Position, Double Pressure, Pressure Held In Center	45	-	-
C2-2R	1/4	Air Pilot	Spr. Center	3-Position, Double Pressure, Pressure Released	45	-	-
C2-3	1/4	Air Pilot	Spring	2-Position, Single Pressure Piloted	35	-	-
C5-3	1/2	Air Pilot	Spring	2-Position, Single Pressure Piloted	35	-	-
C2-4DCD	1/4	Solenoid	Spring	2-Position, Single DIN Solenoid	35	12-24	24-120-220-240
C5-4DCD	1/2	Solenoid	Spring	2-Position, Single DIN Solenoid	35	12-24	24-120-220-240
C2-5DCD	1/4	Solenoid	Solenoid	2-Position, Double DIN Solenoid	20	12-24	24-120-220-240
C5-5DCD	1/2	Solenoid	Solenoid	2-Position, Double DIN Solenoid	20	12-24	24-120-220-240
C2-6HDCD	1/4	Solenoid	Spr. Center	3-Position, Double DIN Solenoid, Pressure Held In Center	45	12-24	24-120-220-240
C2-6RDCD	1/4	Solenoid	Spr. Center	3-Position, Double DIN Solenoid, Pressure Released	45	12-24	24-120-220-240
C2-7	1/4	Hand Lever	Spring	2-Position Lever, Spring Return	-	-	-
C5-7	1/2	Hand Lever	Spring	2-Position Lever, Spring Return	-	-	-
C2-8	1/4	Hand Lever	Hand Lever	2-Position Lever, Friction Held	-	-	-
C5-8	1/2	Hand Lever	Hand Lever	2-Position Lever, Friction Held	-	-	-
C2-9H	1/4	Hand Lever	Spr. Center	3-Position Lever, Pressure Held In Center	-	-	-
C2-9R	1/4	Hand Lever	Spr. Center	3-Position Lever, Pressure Released in Center	-	-	-
C2-10H	1/4	Hand Lever	Detented	3-Position Lever, Pressure Held In Center	-	-	-
C2-10R	1/4	Hand Lever	Detented	3-Position Lever, Pressure Released In Center	-	-	-

* Explosion proof models available.


* Connector not included on solenoid models; see below.

DIN Solenoid Connectors

Electrically actuated Capsula valves utilize a 12mm industrial B-type DIN type solenoid. DIN solenoids feature a totally encapsulated coil with 3 prongs, allowing fast and easy connections. DIN connectors are ordered separately. Mead offers 3 types of DIN connectors to facilitate connections to the solenoid. A full description of these connectors can be found on page 68.




Model PVD1

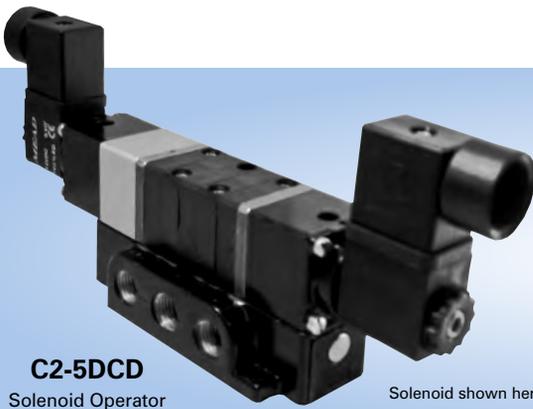

C2-5DCD
Solenoid Operator

Solenoid shown here with (2) connectors, PVD1 (sold separately)

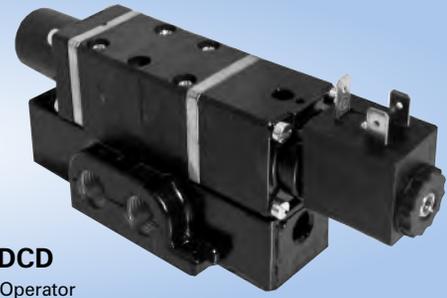


C2-4DCD
Solenoid Operator

Dimensions


2 mounting holes per valve:

1/4" valves - 7/32" diameter
1/2" valves - 9/32" diameter



Model	Long	Wide	High
C2-1	4 7/32	2	2 1/4
C5-1	7 7/16	3	3 1/4
C2-2H	7 1/32	2	2 1/4
C2-2R	7 1/32	2	2 1/4
C2-3	4 21/32	2	2 1/4
C5-3	7 31/32	3	3 1/4
C2-4DCD	6 1/2	2	2 1/4
C5-4DCD	10 9/32	3	3 1/8
C2-5DCD	7 3/4	2	3 9/16
C5-5DCD	10 13/16	3	3 1/8
C2-6HDCD	10 25/32	2	3 9/16
C2-6RDCD	10 25/32	2	3 9/16
C2-7	5 3/8	2	5 5/8
C5-7	9 3/16	3	8 7/8
C2-8	5 7/8	2	5 5/8
C5-8	6 1/4	3	8 7/8
C2-9H	6 1/4	2	5 5/8
C2-9R	6 1/4	2	8 7/8
C2-10H	6 1/4	2	5 5/8
C2-10R	6 1/4	2	8 7/8


Valve Symbols

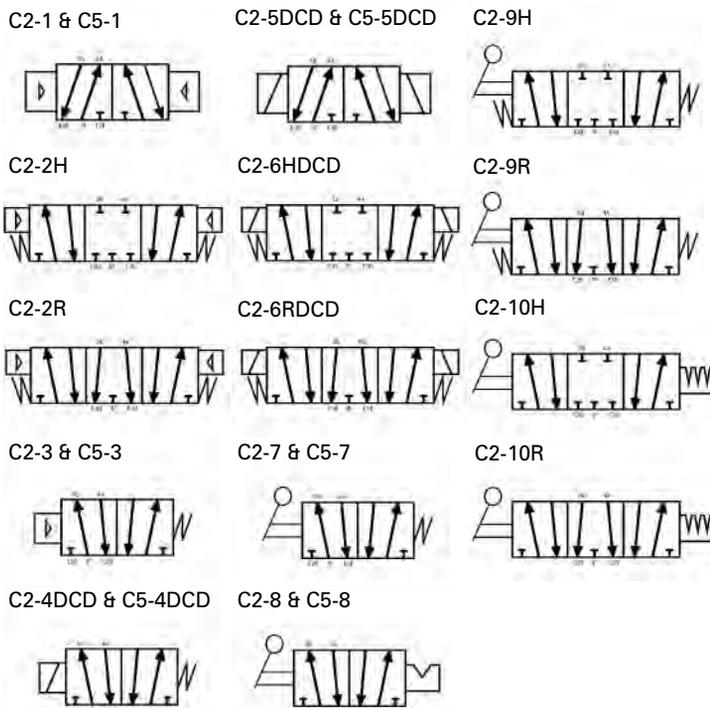

Actuators

The Capsula line offers a wide variety of actuator styles including single & double air piloting, hand lever operators, and single & double solenoid piloting.


Flow Patterns



Capsula valves are 4-way, 5 ported directional control valves. This means that they have one inlet, 2 pressure outputs, and 2 exhaust ports. Dual exhausts facilitate individual flow control of each output port and allow dual pressure and diverter hookups.

Two Position Models

Whenever the inlet is charged, flow will occur at one output port or the other.

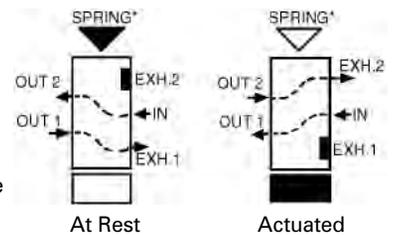


*On double solenoid or double air piloted models, the second actuator replaces the spring.


Three Position Models


Whenever the inlet is charged and neither actuator is signalled, both output ports will either be blocked (pressure held) or exhausted (pressure released). Pressure held models allow a cyl. to be "inched" along. Pressure released models allow the cylinder piston to float in neutral.

Pressure Held Type (H Models)

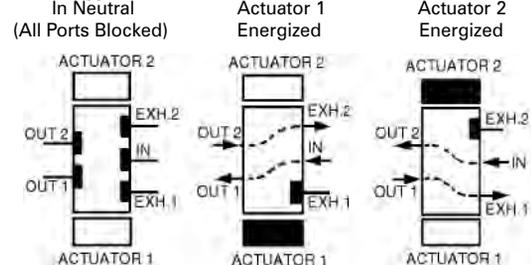

Pressure Release Type (R Models)

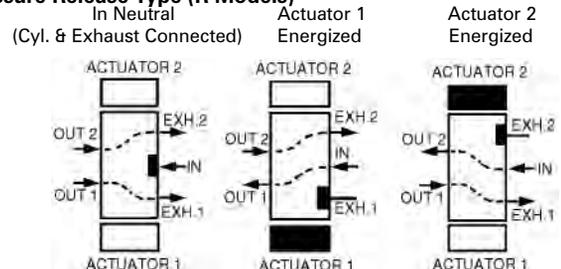

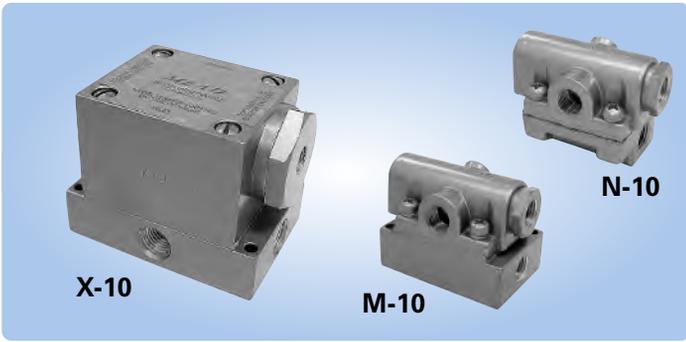

Built-In Speed Controls


Dura-matic 4-way valves not only control cylinder direction but also control cylinder rod speed. Most models include easy-to-use built-in flow controls that permit the user to establish cylinder speeds right at the directional valve.

Remote Air Piloting

Air piloting is a simple and economical way to operate cylinders or other air driven devices; it eliminates the need for electric wiring or solenoids. Dura-matic models are available as either pressure or bleed remote piloting depending upon the model selected. Single piloted models require one remote pilot valve and double piloted models require two.

Pressure Piloted Valves:

These valves shift when pressurized air travels from a remote pilot valve to the pilot port of the Dura-matic valve. The table shows the minimum allowable pilot pressures.



Bleed Piloted Valves:


Bleed piloted models output air from the pilot port(s). When the remote pilot valve is actuated the air is exhausted, causing the valve to shift. In contrast to pressure piloting, bleed pilot valves do not need separate air supplies. However, they do continue to bleed air as long as they are actuated. Below are two remote bleed pilot valves:

Model	Description	Length	Width
404A	Bleed Limit Valve; 1/8" NPT Fitting	2 1/4"	1/2" Hex
405A	Bleed Limit Valve; 1/4" OD Tubing	2 1/4"	1/2" Hex


A wide variety of pilot operators are provided in the Micro-Line valves section (pages 26-27). This line of valves can be used to remotely pilot either the pressure or the bleed type.

Dimensions

L-10, N-10, T-10 and V-10 (all ports 1/8" NPT)

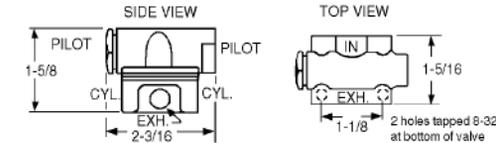

K-10, M-10, O-10 and U-10 (all ports 1/8" NPT)

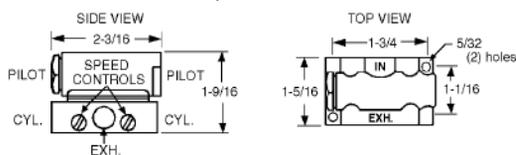

Size (")	Model	Function	Flow*	C _v
1/8	K-10	Single Pressure	13.6	.24
1/8	M-10	Double Pressure	13.6	.24
1/8	O-10	Single Bleed	13.6	.24
1/8	U-10	Double Bleed	13.6	.24
1/4	W-10	Single Pressure	48.5	.63
1/4	X-10	Double Pressure	48.5	.63
1/4	Y-10	Single Bleed	48.5	.63
1/4	Z-10	Double Bleed	48.5	.63
1/8	L-10‡	Single Pressure	10.1	.11
1/8	N-10‡	Double Pressure	10.1	.11
1/8	T-10‡	Single Bleed	10.1	.11
1/8	V-10‡	Double Bleed	10.1	.11

* Flow at 100 PSI Inlet pressure (in SCFM)

‡ These models do not have built-in flow controls


Technical Specifications

Pressure :	20 to 150 PSI (min. 30 PSI on W-10)
Temperature :	-40°F to +150°F
Lubrication:	Petroleum base oil
Filtration:	40 micron


Construction

Type :	Slide (wear compensating nylon)
Dynamic Seals :	Buna N Block Vs
Plate:	Hardened and lapped aircraft quality steel
Exhaust Ports:	Common to both cylinder ports
Speed Controls:	Needle type with check valve to allow free out flow and controlled exhaust flow

Valve Symbols

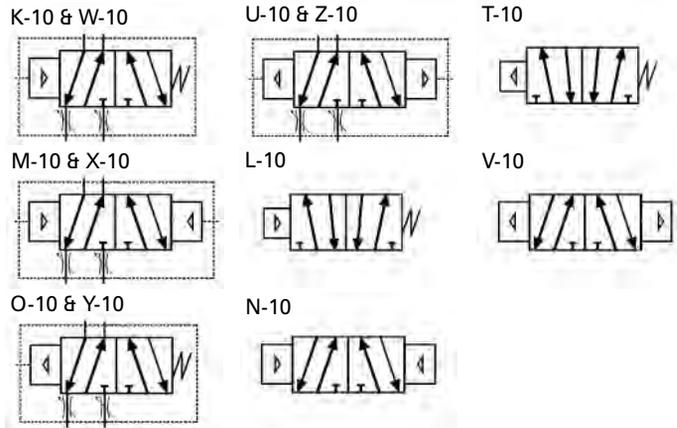

W-10, X-10, Y-10 and Z-10 (all ports 1/4" NPT)

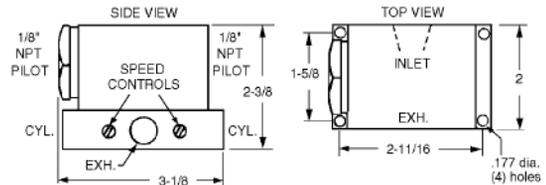



Reduce The Effects Of Repetitive Motion

Many machine operators are required to operate air powered equipment hundreds or thousands of times per day. These types of routines can result in repetitive motion disorders such as Carpal Tunnel Syndrome. The debilitating effects usually result in increasing worker compensation claims and declining employee productivity.

Ergonomically designed to respond to extremely low actuation forces, Mead's Low Stress actuators require as little as 6 ounces of force to initiate a signal. This valve will dramatically reduce the demands on your workers' hands, wrists and arms.


How To Order

Three actuator stickers (red, green & black) are included with each valve. All models may be configured 3-way normally open, 3-way normally closed or 4-way.

Model #	Description
LTV-PB	Basic Valve (Unguarded); For Side Mounting
LTV-PBG	Valve with Button Guard; For Side Mounting
LTV-PBGF	Valve with Button Guard; For Foot Mounting
LTV-PBGP	Valve with Button Guard; For Panel Mounting

Mounting Options

The Low Stress Series allows you to choose between three distinct mounting options. Mounting holes are located in the valve body for standard side mounting. For foot bracket or panel mounting, be sure to specify the proper model number, listed below.

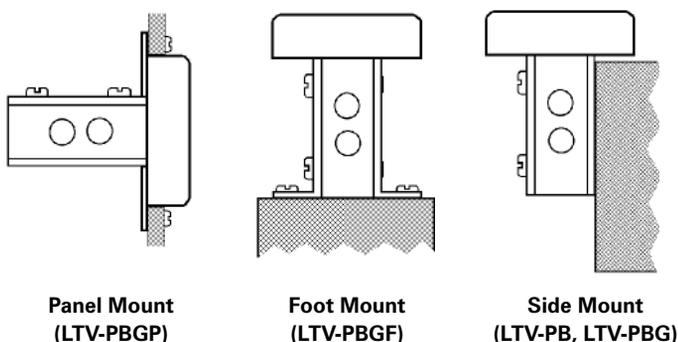


Operating Specifications


LTV Low Stress valves are ported 1/8" NPT. They are shipped with a 3-way normally closed flow pattern for pilot applications, but can be easily converted to 3-way normally open or 4-way flow by removing a port plug.

Technical Specifications	
Temperature :	0°F to 115°F
Pressure:	25 - 125 PSI air
Filtration:	Standard 40 micron. filter recommended to prolong seal life
Lubrication:	Petroleum based oil
Flow at 100 PSI:	14 SCFM
C _v Factor:	0.24

Valve Symbol - All Models



Dimensions

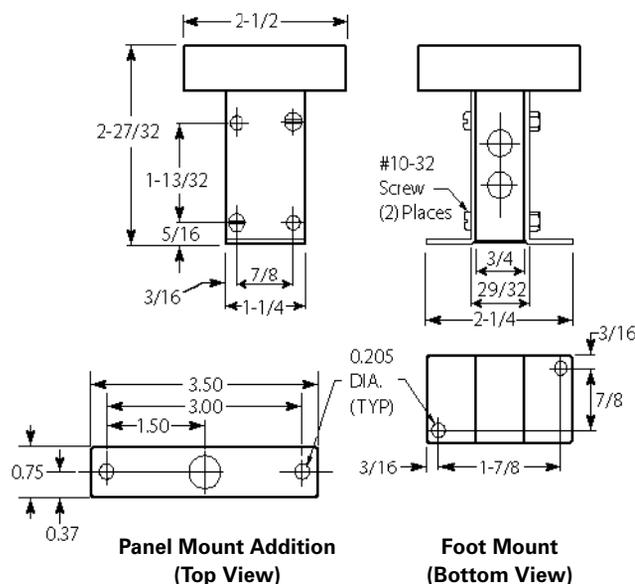

Low Stress Two-Hand Control

To provide safer operation of assembly equipment and other machinery use the LTV Low Stress valves with the CSV-107 two-hand control unit. When used as directed, this unit demands concurrent actuation from two remote inputs before a signal can be initiated. Further, the release of one or both inputs immediately stops the output signal. The unit cannot recycle until both valves are again simultaneously actuated. The CSV-107 requires no electrical connections. For more information regarding the CSV-107, please see page 63.



LTV-5
Pin Plunger



LTV-10
Straight Leaf



LTV-15 Roller Leaf
LTV-90 Nylon Roller



LTV-20
One-Way Roller Leaf



LTV-25*
Roller Plunger



LTV-30*
Cross Plunger




* For 15/32" panel openings; 15/32-32 UNS

Light-Touch, Snap-Acting Control Valves

Mead's LTV valves are compact 1/8" ported 4-way valves that may be actuated by hand, remote air signal, electric signal or mechanically by a machine element. They are ideal for powering small or medium sized cylinders and for piloting larger valves. Some models require as little as 4 ounces of force and .010" of plunger travel to actuate. See the chart on the opposite page for individual valve specifications.

Micrometer Trip Position Adjustment Available On LTV-10, LTV-15 and LTV 20

An optional screw adjustment on the valve lever allows the user precision control of the valve actuator. Specify LTV-10A, LTV-15A, or LTV-20A.



DIN Solenoid Connectors


Electrically actuated LTV valves utilize DIN type solenoids. DIN solenoids feature a totally encapsulated coil with 3 prongs, allowing fast and easy connections. DIN connectors are ordered separately. Mead offers 3 types of DIN connectors to facilitate connections to the solenoid. A full description of these connectors can be found on page 68.



Solenoid shown with connector PVD1 (sold separately)

LTV Flow Patterns

For all models, except LTV-60, which is opposite.

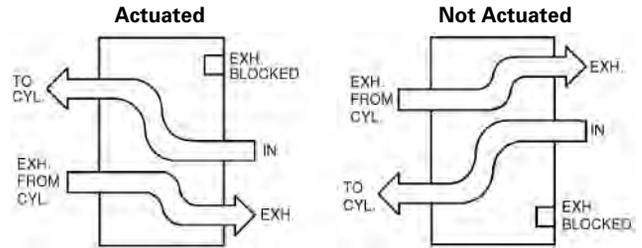

General Specifications


Pressure Range:	25 to 125 PSI (Solenoid models to 100 PSI)
Temperature:	0°F to 115°F
Flow:	0.24 C _v
Flow at 100 PSI:	14 SCFM
Ports:	1/8" NPT Standard; LTV-60 and LTV-110 pilot ports are 10-32
Lubrication:	Petroleum Base Oil
Filtration:	40 Micron Minimum
Body:	Cast Aluminum
Seals:	Buna N
Spool:	Aluminum
Response:	20-30 ms

Valve Symbols (Only Model Numbers are indicated.)

5, 10, 45, 50 & 85



115DD



15, 25, 30, 40 & 75



120DD



20 & 80




125, 140, MH, EH & FH




60 & 60L



130 & ES



110



35 & TP



Solenoid Models:

24 VDC = 6.5 watts / .27 amp
120 VAC = 8.5 watts / .07 amps

LTV-75
Roller



LTV-80
One-Way Roller



LTV-85
Extended Rod (6")



LTV-115DD
Single Solenoid



LTV-120DD
Double Solenoid



LTV-125, LTV-130
Knob* (LTV-125 has threaded stem)



* For 15/32" panel openings; 15/32-32 UNS

LTV-35*
Flip Toggle



LTV-40*
Ball Roller



LTV-45*
Straight Plunger



LTV-50
Fingertip Lever



LTV-60, Single Pressure
LTV-110, Double Pressure




LTV-60L
Low Pressure



* For 15/32" panel openings;
15/32-32 UNS

Basic Dimensions

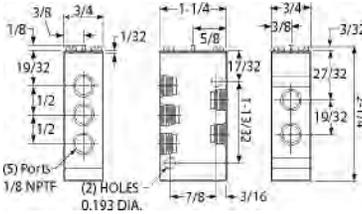

Note: Envelope dimensions of valves with actuators are shown in the chart on the right.

LTV Valve Stacks

Stacked valves reduce piping requirements by eliminating the need for a separate air supply to each valve. All LTV valves are stackable except LTV-75, 80, 85, 140, MH, TP, EH, FH & ES. When LTV-50, LTV-115DD or LTV-120DD valves are stacked 1/4" spacers are added between valves. To order, add "M" to the model number, specify number, type and position of valves.



Solenoids shown here with connector PVD1 (sold separately)

Model	Actuator	Return	Act. Force @ 80 PSI	Act. Stroke Distance(") Full Open	Over Travel	Leng. (")	Width (")	Hgt. (")
LTV-5	Pin Plunger	Air Spring	13 oz.	.016	.094	1 1/4	3/4	2 3/8
LTV-10	Straight Leaf	Air Spring	5.5 oz.	.016	.156	2 3/32	3/4	2 1/2
LTV-10A	Adjustable Leaf	Air Spring	5.5 oz.	.016	.156	2 3/32	3/4	2 5/8
LTV-15	Roller Leaf	Air Spring	5.5 oz.	.016	.156	2 5/32	3/4	2 7/8
LTV-15A	Adjustable Roller Leaf	Air Spring	5.5 oz.	.016	.156	2 5/32	3/4	3
LTV-20	1-Way Roller Leaf	Air Spring	5.5 oz.	.016	.156	2 3/32	3/4	3 11/32
LTV-20A	Adjustable Roller Leaf	Air Spring	5.5 oz.	.016	.156	2 3/32	3/4	3 15/32
LTV-25	Roller Plunger	Air Spring	13 oz.	.016	.094	1 1/4	3/4	3 5/8
LTV-30	Cross Plunger	Air Spring	13 oz.	.016	.094	1 1/4	3/4	3 5/8
LTV-35	Flip Toggle	Detent	9.25 oz.	30°	-	1 1/4	3/4	3 25/32
LTV-40	Ball Roller	Air Spring	13 oz.	.016	.094	1 1/4	3/4	3 1/32
LTV-45	Straight Plunger	Air Spring	13 oz.	.016	.094	1 1/4	3/4	3 11/32
LTV-50	Fingertip Lever	Air Spring	5.5 oz.	.016	.156	2 17/32	3/4	2 11/16
LTV-60+	Single Pressure~	Air Spring	-	-	-	1 1/4	3/4	2 11/32
LTV-60L*	Low Pressure	Air Spring	-	-	-	1 1/4	3/4	3 3/32
LTV-75	Heavy-Duty Roller	Air Spring	14 oz.	.031	.313	2 7/32	3/4	4 5/32
LTV-80	Heavy-Duty 1-Way Roller	Air Spring	14 oz.	.031	.313	2 13/32	3/4	4 15/32
LTV-85	Heavy-Duty Extended Rod	Air Spring	4 oz.	.125	.500	6 1/4	3/4	3 17/32
LTV-90	Adjustable Roller Leaf	Air Spring	5.5 oz.	.016	.156	2 5/32	3/4	3
LTV-110	Double Pressure~	Ext. Air Pilot	-	-	-	1 1/4	3/4	2 11/32
LTV-115DD**	Solenoid (DIN)	Air Spring	-	-	-	1 5/8	7/8	3 9/32
LTV-120DD**	Solenoid (DIN)	Solenoid	-	-	-	1 5/8	7/8	4 19/32
LTV-125	Knob	Air Spring	13 oz.	.016	-	1 1/4	5/8	3 19/32
LTV-130	Knob	Detent	2 lbs.	.094	.125	1 1/4	5/8	3 9/32
LTV-140	Palm	Air Spring	13 oz.	.016	.094	1 3/8	1 3/8	3 25/32
LTV-MH ^	Mushroom Head	Air Spring	1 lb.	.218	.047	1 5/8	1 5/8	4 3/16
LTV-TP ^	Two Position	Detent	-	-	-	1 5/8	1 5/8	4 5/16
LTV-EH ^	Extended Head	Air Spring	-	.218	.049	1 5/8	1 5/8	3 13/16
LTV-FH ^	Flush Head	Air Spring	-	.218	.049	1 5/8	1 5/8	3 3/4
LTV-ES	Emergency Stop (Red)	Detent	2 lbs.	.218	.125	2 1/2	2 1/2	4 9/32

* Minimum pilot pressure of 25 PSI required.

** Specify voltage: 12DC, 24DC, 24AC or 120AC

^ Specify actuator color: red, green or black

+ Pilot pressure must equal at least 60% of inlet pressure.

~ 10-32 pilot port

LTV-140*
Palm



LTV-MH**
Mushroom Head



LTV-TP**
Two Position
Detent



LTV-EH**, Extended Head
LTV-FH**, Flush Head



LTV-ES, Emergency Stop



* For 15/32" panel openings;
15/32-32 UNS ** For 1 3/16" panel openings

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories


Index



* For 15/32" panel openings; 15/32-32 UNS


Mead's MV air switches are 3-way 1/8" ported air pilot valves that are identical in size, actuating style, and mounting characteristics to most industrial type electric limit switches. Use them in place of electric limits to save on hookup cost and eliminate spark hazard. MV valves simplify circuits by eliminating the need for wire shielding, transformers, and solenoids.

The MV air switch may be piped normally closed, normally open, or as a diverter. These alternatives are described in detail below.

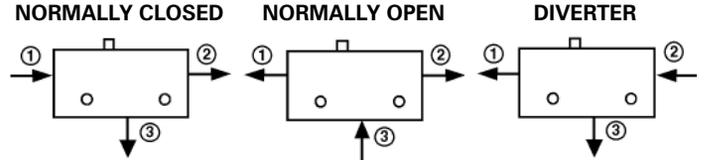

<p>NORMALLY CLOSED</p> <p>Pressurized air flows from 1 to 2 when button is pushed.</p> <p>Exhaust air flows from 2 to 3 when button is released.</p>	<p>NORMALLY OPEN</p> <p>Pressurized air flows from 3 to 2 when button is not pushed.</p> <p>Exhaust air flows from 2 to 1 when button is pressed.</p>	<p>DIVERTER</p> <p>Pressurized air flows from 2 to 1 when button is pushed.</p> <p>Pressurized air flows from 2 to 3 when button is released. This hookup does not provide for exhaust.</p>
---	--	--

Perform "AND" Logic Function With MV-60



This hookup provides that flow will occur at C only when air signals are received at A and B. The MV-60 is a 3-way air piloted valve.

Add Push to Connect 1/4" Fittings




MV-45-C4

MV valves are available with 1/4" brass push to connect fittings. The valve will be provided with a fitting for the inlet, outlet and the exhausts ports. Any MV valve may utilize this option. The valve's body height increases by 5/16" and the mounting holes are 0.532" apart.

General Specifications

Pressure Range:	Vacuum to 120 PSI
Media:	Air or Inert Gas
Flow:	0.11 C _v
Flow at 100 PSI:	6 SCFM
Ports:	1/8" NPT
Cycle Life:	7-10 million
Force to Actuate:	As Low as 6.4 Ounces
Max. Ambient Temp.:	115°F
Lubrication:	Not Required
Filtration:	40 Micron
Seals:	Viton
Spool:	Dupont Teflon®
Body:	Cast Zinc


Valve Symbols

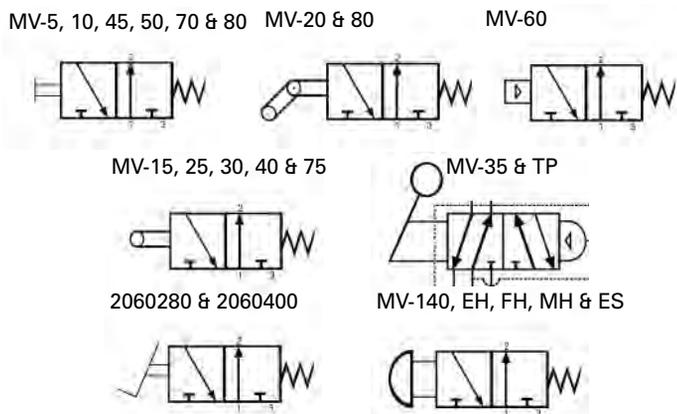

MV-75



MV-80



MV-85 (Lever 6" long)



MV-140*



MV-MH‡

* For 15/32" panel openings; 15/32-32 UNS



MV-35*
Locks In Down Position



MV-40*



MV-45*



MV-50




MV-60
1/8" NPT Pilot Port



MV-70
Lever 4 1/4" long

* For 15/32" panel openings; 15/32-32 UNS

Basic Valve Dimensions

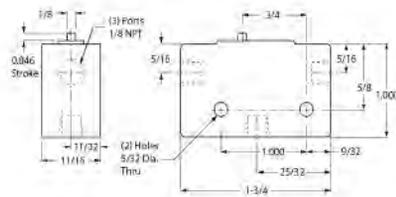


Envelope dimensions of valves are shown in the chart below.

Model	Actuator	Act. Force lbs. @ 100 PSI		Act. Stroke Distance			Envelope Dimensions		
		NC	NO	To Crack Open	To Full Open	To Over Travel	Len.	Wid.	Hgt.
MV-5	Pin Plunger	2.5	3.3	.035	.046	.035	1 3/4	1 1/16	1
MV-10	Straight Leaf	1.2	1.5	.100	.137	.079	2 3/16	1 1/16	1 1/4
MV-15	Steel Roller	1.0	1.3	.100	.137	.079	2 3/16	1 1/16	1 5/8
MV-20	1-Way Roller Leaf	1.0	1.3	.100	.137	.079	2 3/16	1 1/16	2 1/16
MV-25	Roller Plunger	2.8	3.5	.035	.046	.155	1 3/4	1 1/16	2 3/16
MV-30	Cross Roller	2.8	3.5	.035	.046	.155	1 3/4	1 1/16	2 3/16
MV-35	Flip Toggle	1.5	2.3	35°	35°	35°	1 3/4	1 1/16	2 5/16
MV-40	Ball Roller	2.5	3.3	.035	.046	.035	1 3/4	1 1/16	1 19/32
MV-45	Straight Plunger	2.5	3.3	.035	.046	.155	1 3/4	1 1/16	1 29/32
MV-50	Fingertip Lever	1.0	1.3	.100	.137	.079	2 5/8	1 1/16	1 3/8
MV-60	Pressure Piloted	40*	40*	-	-	-	1 3/4	1 1/16	1 5/8
MV-70	Extended Leaf	0.7	1.0	.255	.315	.195	4 1/2	1 1/16	1 9/16
MV-75	HD Roller Leaf	2.8	3.5	.093	.119	.129	2 1/4	1 3/4	3 7/16
MV-80	HD 1-Way Roller	2.8	3.5	.093	.119	.129	2 1/8	1 3/4	4 1/8
MV-85	HD Extended Rod	0.4	0.6	.637	.782	.330	6 1/4	1 3/4	3 1/8
MV-90	Nylon Roller	1.0	1.3	.100	.137	.079	2 3/16	1 1/16	1 5/8
MV-140	Palm Actuator	2.5	3.3	-	-	-	1 3/4	1 3/8	2 1/4
MV-MH	Mushroom Head	-	-	-	-	-	1 3/4	1 1/2	2 5/8
MV-TP	Two Position	-	-	-	-	-	1 3/4	1 1/2	3 1/32
MV-FH	Flush Head	-	-	-	-	-	1 3/4	1 1/2	2 7/32
MV-EH	Extended Head	-	-	-	-	-	1 3/4	1 1/2	2 13/32
MV-ES	Emergency Stop	-	-	-	-	-	2 1/2	2 1/2	2 7/8
MV-EMS	Emergency Stop	-	-	-	-	-	1 3/4	1 5/8	3 1/4

* PSI; NO=Normally Open, NC= Normally Closed

Model #2060400

Model has plug-in fittings for 1/4" OD tube



Model #2060400G (Guarded)



NOTE: 2060400 and 2060400G are provided with push to connect fittings as the C4 option (described on opposite page). For Normally Open applications or where all ports are needed, specify either 2060400-C5 or 2060400G-C5.



MV-TP‡



MV-FH (Button Flush)‡
Specify Red, Green or Black



MV-EH (Button 5/16" Up)‡
Specify Red, Green or Black



MV-ES‡
Red & Spring Return Only



MV-EMS
Red & Manual Only

NEW!

‡ For 1 3/16" panel opening

These compact air valves provide economical cam, fingertip, palm, hand, and foot actuation. 3-way models are ideal for actuating single-acting cylinders and 4-way directional valves. 4-way models are suitable for the control of double-acting cylinders. Three types of spool designs are available.

General Specifications


- Media:** Air to 150 PSI
- Temperature Range:** -40°F to +250°F
- Cam Buttons:** Hardened Steel
- Spring:** Stainless Steel
- Seals:** Buna
- Body:** Machined Aluminum
- Body (4B-1, 4W-1, 201 and 3C-1):** Die Cast Zinc




Poppet Spool Type

A high degree of reliability is achieved by these valves with the simple, yet efficient, poppet type design. A short operating stroke assures instantaneous response while minimizing operator fatigue.

Model Number	Actuator	Style	Port (NPT)	Flow (Cv)	Pre-Travel	Over Travel	Force Req. @ 100 PSI
FC-1	Cam Button	3-Way NC	1/8"	0.13	3/64"	None	17lbs.
FC-2A	Cam Button	3-Way NO	1/8"	0.32	1/8"	1/8"	11lbs.
FC-101	Cam Button	3-Way NC	3/8"	1.15	1/16"	None	30lbs.
FT-1	Fingertip Lever	3-Way NC	1/8"	0.13	1/4"	None	4lbs.
FT-2A	Fingertip Lever	3-Way NO	1/8"	0.32	7/8"	1/8"	2lbs.
FT-4	Fingertip Lever	4-Way	1/8"	0.16	7/8"	None	3lbs.
FT-101	Fingertip Lever	3-Way NC	3/8"	1.15	3/16"	None	8lbs.
201	Foot Treadle	3-Way	3/8"	1.15	5/8"	None	7 1/2 lbs.

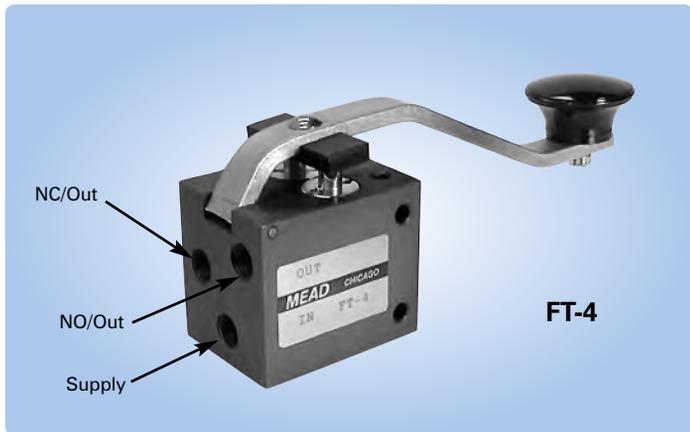


Valve Symbols

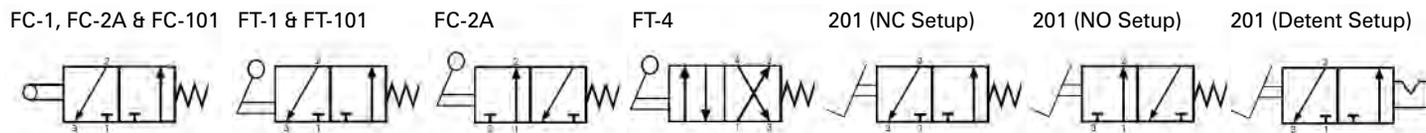


Dimensions


Models FC-1, & FC-2A, FT-1, FT-2A




Models FC-101 & FT-101



Model FT-4




Model 201



Flow Patterns

Model 201

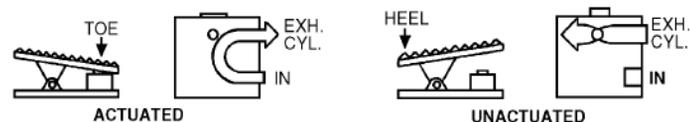

Model 201 may be adjusted in seconds during installation to be detented or spring return. The valve may be set up as either normally open or normally closed for spring return operation.



201




Balanced Spool Type


Actuating Force remains constant regardless of air pressure due to the balanced spool design. This series is particularly suited for use in situations where a high rate of flow is required through a 3-Way cam or palm button valve. Additionally the spool design eliminates the momentary loss of pressure due to valve shifting.

Model Number	Actuator	Style	Port (NPT)	Flow (Cv)	Pre-Travel	Over Travel	Force Req. @ 100 PSI
FC-51	Cam Button	3-Way NC	1/8"	0.81	1/8"	1/8"	7lbs.
FC-52	Cam Button	3-Way NO	1/8"	0.68	1/8"	1/8"	5lbs.
PC-51	Palm Button Spr. Ret.	3-Way NC	1/8"	0.81	1/8"	1/8"	7lbs.
PC-51A	Palm Button Detent	3-Way NC	1/8"	0.81	1/8"	1/8"	3lbs.
PC-52	Palm Button	3-Way NO	1/8"	0.68	1/8"	1/8"	5lbs.

Valve Symbols

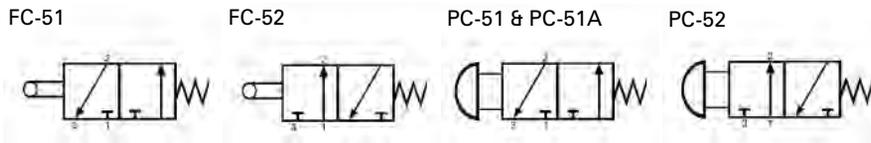

Dimensions

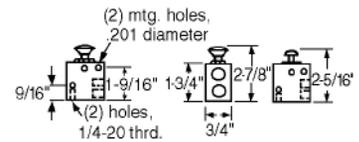


Spool Type - Rugged Conditions

Time-tested reliability is the trademark of these valves. Due to the unique design, performance is not greatly affected by the use of unclean air and operation in chip and dirt-ridden environments.

Model Number	Actuator	Style	Port (NPT)	Flow (Cv)	Pre-Travel	Over Travel	Force Req. @ 100 PSI
3C-1	Cam Button	3-Way NC	1/4"	0.48	1/16"	None	9lbs.
4B-1	Hand	4-Way	1/4"	0.48	5/8"	None	5lbs.
4W-1	Foot Treadle	4-Way	1/4"	0.48	5/16"	None	18lbs.


Flow Patterns

Models 4B-1 and 4W-1

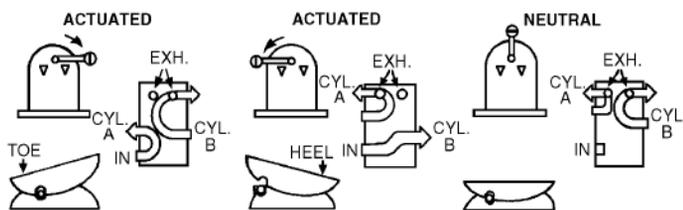


Note: In neutral, cylinder ports are dumped to atmosphere.


Valve Symbols



Dimensions



Note: height is 1-1/2"

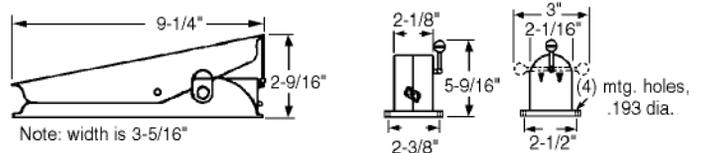

Note: width is 3-5/16"



Cylinder Materials

- Heads:** Machined from solid aluminum; black anodized
- Tubes:** Aluminum hard anodized to 60 Rc (16 RMS finish)
- Piston:** Solid high alloy aluminum
- Rod:** Hard chrome plated ground and polished steel
- Bearing:** Long wearing oil impregnated porous bronze
- Piston and Rod Seals:** Wear compensating Buna N vee rings
- Rod Wiper:** PTFE
- Tie Rods:** High tensile steel torqued to allow for flexure

Double-Rod Cylinders

Cylinders having a common piston rod that protrudes from both ends are available in all bore sizes. In addition to providing a dual power source, double rod cylinders serve to minimize rod deflection and to facilitate the control and adjustment of rod travel.

Specify Cushions for Shock Absorption

Model DM-112 is available with adjustable cushions that decelerate the piston rod over the last 11/16" of stroke. They allow the user to set the degree of cushioning needed for each specific application.


Note: Cushions are not recommended for hydraulic use.

Pneumatic End-of-Stroke Sensors (Inter-Pilots®)



A miniature 3-way valve built into the cylinder head is actuated by the cylinder piston as it reaches the end of its stroke. Once contacted, the 3-way Inter-Pilot® valve emits an air signal. In this manner, sequencing is achieved without external limit switches and electric wiring.

Inter-Pilots® may be built (10-32 Ports) into either or both cylinder heads. They are not for hydraulic use. Cylinder operating pressure must not exceed pressure used to feed the Inter-Pilot®. Inter-Pilots® are not available on DM-075.



Operating Parameters

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam. (In.)	Max. Oper. Pressure	
				Air	Oil†
3/4"	44	.44	5/16	250	1000
1 1/8"	100	1.00	5/16	250	1000

*Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. Note: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize your cylinder by about 25% to assure smooth operation.

** To determine thrust at other inlet pressures, multiply factor by the desired pressure.

† DM cylinders are not rated or approved for use in hydraulic circuit where an impulse or pressure spike may occur.

Operating Specifications

- Temp. Range:** -40 to +250°F (to +400°F on request)
- Lubrication:** Not necessary, but will extend cylinder life when operated with dry air.
- Filtration:** Not essential, but a standard 40 micron filter placed upstream will prolong seal life.

Pneumatic Stroke Completion Sensors (SCS)



Port mounted SCS valves emit an air signal when the cylinder rod has stopped even if the piston has not contacted the end cap. SCS valves are ideal for use in situations where the full cylinder stroke is not used. See pg. 60.

Accessories

	Bore Diameter	3/4"	1 1/8"
	Flex Rod Couplers	DMA-312	DMA-312
	Forged Rod Clevis	DMC-5	DMC-5
	Pivot Bracket	NA	DMP-7
	Clevis Bracket (with Pin)	NA	DMR-7

Self Aligning Rod Couplers

Rod couplers simplify cylinder alignment problems by compensating for 2° angular error and 1/16" lateral misalignment on both extension and retraction strokes. Greater reliability is achieved by reducing cylinder and component wear. Order model # DMA-312 for these small bore cylinders. For other models, see page 47 for dimensions.



Part #	Rod Thread	Cylinder Type
DMA-312	5/16-24	C-112, DM-075, DM-112
DMA-375	3/8-24	No Standard
DMA-437	7/16-20	DM-150, DM2-150, HD1-150, DM-200, DM2-200, HD1-200, DM-250, DM2-250, HD1-250
DMA-500	1/2-20	C-150
DMA-625	5/8-18	C-250
DMA-750	3/4-16	DM-325, DM2-325, HD1-325, DM-400, DM2-400, HD1-400
DMA-875	7/8-14	No Standard
DMA-1000	1-14	C-300, DM-600, HD1-600
DMA-1250	1 1/4-12	No Standard

Reference

Control Valves

Cylinders

Specialty Valves


Production Devices

Accessories


Index

Bore	3/4	1 1/8
A	1/2	1/2
CB	-	5/8
CD	25/64	25/64
CR	2 1/4	2 1/4
CW	-	1/2
DD	13/64	13/64
E	1 1/4	1 5/8
EB	1 7/16	1 7/16
EE(NPTF)	1/8	1/8
EF	11/32	11/32
EJ	13/64	13/64
F	-	1/8
FB	7/32	7/32
G	3/4	3/4
J	3/4	3/4
KK	5/16-24	5/16-24
FL	1 1/8	5/8 Clevis 1 1/4 Pivot
M	-	3/8
MM	5/16	5/16
NT	13/64-Thru	13/64-Thru
R	13/16	1 1/8
RT	10-32	10-32
ST	9/32	9/32
SV	5/16	5/16
TF	2 13/32	2 25/32
TN	13/16	1 1/8
UF	2 29/32	3 9/32
W	1/2	1/2
XT	11/16	11/16
H	7/8	7/8
HA	1 1/4	1 1/4
HB	1/4	1/4
HC	5/8	5/8
HD	5/16	5/16
HE	3/4	3/4
SN*	1 3/4	1 3/4
XD*	3 3/4	3 3/8 Pivot 3 3/4 Clevis
ZJ*	2 5/8	2 5/8
ZM**	3 1/8	3 1/8


* Add Stroke Length to Dimension
 ** Add 2 x Stroke Length to Dimension

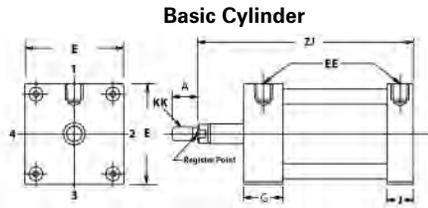


Double Rod Model DR

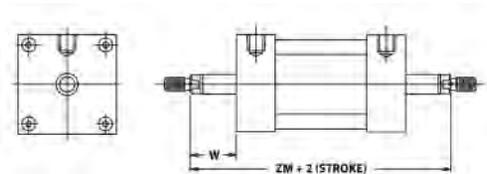


Bottom Flush Model FB

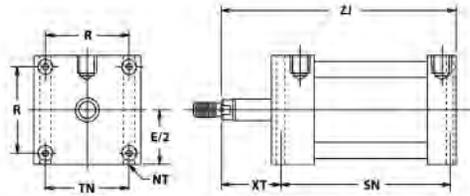


DMC Forged Rod Clevis w/Pin




DMR Clevis Bracket w/Pin
1 1/8" Only

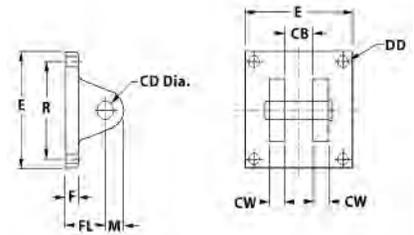


Clevis Model PB

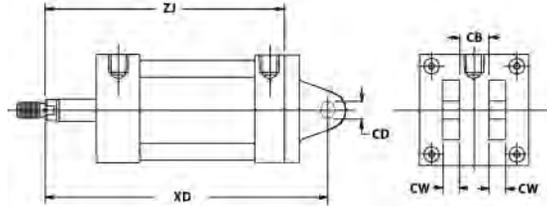


DMP Pivot Bracket
1 1/8" Only

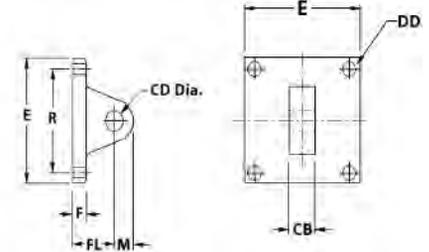


Pivot Model PE

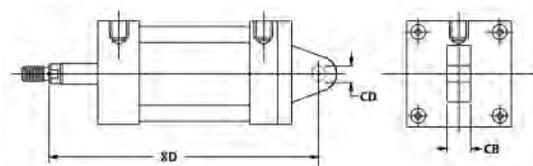


Rod End Flange Model FF*

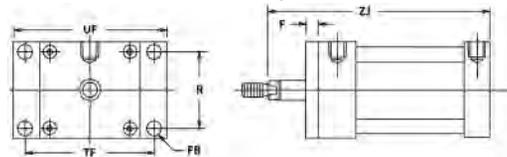

Self Aligning Rod Couplers



Blind End Flange Model FR*

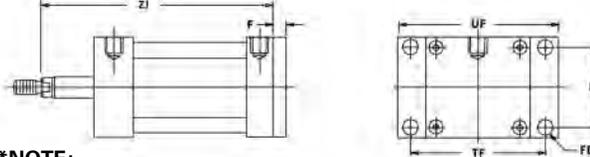

***NOTE:**

- 1 1/8" bore cylinders use two angle brackets for flange mounting. (no flange plate)
- On 1 1/8" bore models with ram end cushions and/or Inter-Pilots, 9/16" must be added to G, ZB, SN, and XD dimensions. For blind end cushions and/or Inter-Pilots, 5/8" must be added to J, ZJ, SN, and XD dimensions.
- 3/4" and 1 1/8" bore cylinders use spacers for fractional strokes. For dimensioning, use the next even inch stroke. For true fractional stroke cylinders, specify CL (cut to length).
- 3/4" and 1 1/8" bore models have (4) 10-32 threaded holes for rear flush mounting.

How To Order

DM-112 x 10 - FB - DR

Base Model

DM-075 (3/4" Bore)
 DM-112 (1 - 1/8" Bore)

Stroke

State Fractional Strokes as decimals (i.e. 10.5)
Note: These cylinders use spacers for fractional stroke. For dimensioning, use the next even stroke. For true fractional stroke cylinders specify CT (i.e., 10.5 CT)

Mounting

NOTE: DM-075 only available with FB Mount.
 In addition to Models shown above the DM-112 is available in a Nose Mount (NS). Consult the factory for dimensional information.

FF Option

Front Flange - Plate extends beyond the front head. * On 1 1/8" bore cylinder, two flange bars replace the flange plate.

Options

- DR Double Rod
- VI Viton Seals
- HY Hydraulic Use

Options below are only available on DM-112

- CF Front Cushions
- CR Rear Cushions
- CB Cushions Both Ends
- IPF Interpilots - Front Head
- IPR Interpilots - Rear Head
- IPB Interpilots - Both Heads



Built to Last (Materials)

- Cylinder heads are machined from solid aluminum bar stock and black anodized
- Tubes (DM1) and Tube Extrusions (DM2) are aluminum hard anodized to 60 Rc (16 RMS finish)
- Pistons are solid high alloy aluminum
- Pistons have a PTFE wear band
- Dynamic seals are high quality wear-compensating Buna N block V rings
- Rods are hard chrome plated ground and polished steel
- Rod Wipers are PTFE
- Tie Rods (DM1) are high tensile steel torqued to allow for flexure

Dyna-Mation -vs- HD Models

Dyna-Mation cylinders are designed to generate high performance in most applications. However, when operating conditions are severe, heavy duty models (HD Series, see pages 38-47) are recommended. The HD Series boasts the added benefits of a large hard-coated outboard rod bearing. The following profiles illustrate the differences of the rod end head in all three types of cylinders:



DM2
Extruded Body Design with
Internal Rod Bearing



DM1
Internal Bronze Rod Bearing
Tie Rod Design



HD1
Heavy Duty Hard-Coated
Rod Bearing

Two Designs To Meet Application Demands

Mead Dyna-Mation cylinders are available two design series, the DM1 and the DM2. The DM1 series incorporates tie-rod construction while the DM2 series cylinders are constructed with an extruded body design, making these cylinders better suited for wash down applications and clean environments.

Specify Cushions for Shock Absorption

Adjustable cushions that decelerate the piston rod over the last $\frac{11}{16}$ " of stroke may be ordered in either or both ends of Dyna-Mation cylinders. They allow the user to set the degree of cushioning needed for each specific application.

A built-in check valve assures a fast getaway in the opposite direction. The tough cushion seal combines with the ultra-smooth control stem to provide years of reliable service.

Operating Parameters

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam.(In.)	Max. Oper. Pressure	
				Air	Oil†
1 1/2"	177	1.77	5/8	250	1000
2"	314	3.14	5/8	250	1000
2 1/2"	491	4.91	5/8	250	1000
3 1/4"	830	8.30	1	250	700
4"	1257	12.57	1	250	650
6"	2827	28.27	1 3/8	250	435

*Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. Note: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize your cylinder by about 25% to assure smooth operation.

** To determine thrust at other inlet pressures, multiply factor by the desired pressure.

† DM cylinders are not rated or approved for use in hydraulic circuit where an impulse or pressure spike may occur.

NOTE: 6" bore only available in DM1 Series.

Operating Specifications

Temp. Range:	-40 to +250°F (to +400°F on request)
Lubrication:	Not necessary, but will extend cylinder life when operated with dry air.
Filtration:	A standard 40 micron filter placed upstream will prolong seal life.


Double-Rod Cylinders

Cylinders having a common piston rod that protrudes from both ends are available in all bore sizes. In addition to providing a dual power source, double rod cylinders serve to minimize rod deflection and to facilitate the control and adjustment of rod travel. See page 35 for ordering instructions.

Right Angle Flow Controls



Control the speed of your cylinders with Mead Flow Control Valves. Right-angle flow controls can be found on page 68. For precise metering of air, see Mead Dyla-Trol Valves on page 68.

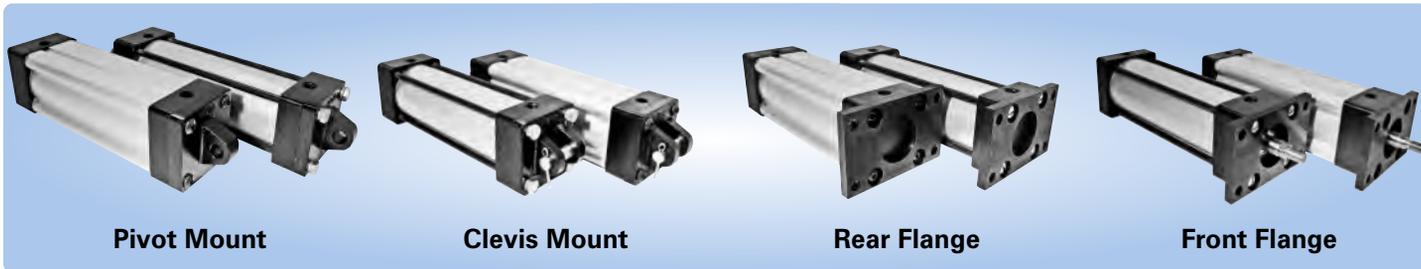

Pivot Mount

Clevis Mount

Rear Flange

Front Flange

Accessories

Rod clevises, rod eyes, pivot brackets, clevis brackets, and pivot pins are available in each bore size to accomplish all four of the combinations illustrated below.

Rod Clevis and Pivot Bracket



Clevis Bracket and PE Cylinder



Rod Eye and Clevis Bracket



Pivot Bracket and PB Cylinder



Pneumatic End-of-Stroke Sensors (Inter-Pilots®)




A miniature 3-way valve built into the cylinder head is actuated by the cylinder piston as it reaches the end of its stroke. Once contacted, the 3-way Inter-Pilot® valve emits an air signal. In this manner, sequencing is achieved without external limit switches and electric wiring.


Inter-Pilots® may be built into either or both cylinder heads. They are not for hydraulic use. Cylinder operating pressure must not exceed pressure used to feed the Inter-Pilot®.

Inter-Pilot® Port Locations

For 1 1/2" Bore Cylinders



For 2"-4" Bore Cylinders



Note: Inter-Pilot® ports are 10-32.

Rod Position Sensors



Solid State and Reed Switches allow the cylinder user to sense rod position anywhere within the stroke. Switches are available for both models. For the DM1 series the switch attaches to any of the four tie-rods. For the DM2 series, a dovetail slot runs along the cylinder tube to facilitate fast and accurate position setting.

Solid State

Solid State effect technology provides contactless switching. With contactless switching there are no moving parts; therefore, reliability and life expectancy are greatly increased. Solid State switches come with built-in indicator lights (3 wire), reverse polarity and surge protection standard. Order either sinking or sourcing depending on logic systems requirements. They have an IP67 protection rating.

Technical Information			
Operating Voltage:	5-28 DC	Working Temp:	23 to 194°F
Operating Time:	On 2 ms	Repeatability:	.001 ms
	Off .1 ms	Max. Switching Current :	.5A
Current Sinking: Load connected between output and positive supply.			
Current Sourcing: Load is connected between output and common.			

Reed

Mead Reed Switches are epoxy encapsulated and economically priced for reliable low cost position sensing. Reed switches come with wire leads. LED (2 wire, 3m length) included.

Note: Not for use with hydraulic cylinders.

Technical Information			
Operating Voltage:	240 AC Max.	Working Temp:	67 to 200°F
Switch Current:	.5 Amps Max.	Operating Time:	On .5 ms
	10 Watts Max.		Off .5 ms

Pneumatic Stroke Completion Sensors (SCS)



Port mounted SCS valves emit an air signal when the cylinder rod has stopped even if the piston has not contacted the end cap. SCS valves are ideal for use in situations where the full cylinder stroke is not used. SCS valves are available in 1/8", 1/4", 1/2" pipe sizes. See pg. 60.


Self Aligning Rod Couplers




Rod couplers simplify cylinder alignment problems by compensating for 2° angular error and 1/16" lateral misalignment on both extension and retraction strokes. Greater reliability is achieved by reducing cylinder and component wear. All components are heat treated for wear and corrosion resistance.

* see page 32 for complete listing of Mead's self aligning rod couplers.

STEP 1:



STEP 2:



STEP 3:

SELECT A BORE SIZE

Bore	1 1/2"	2"	2 1/2"	3 1/4"	4"	6"
Force*	177	314	491	830	1257	2827
Models	DM1-150	DM1-200	DM1-250	DM1-325	DM1-400	DM-600
Available	DM2-150	DM2-200	DM2-250	DM2-325	DM2-400	NA

* Maximum force output at 100 PSI inlet pressure (in lbs.)

CHOOSE STROKE LENGTH





PISTON ROD DIAMETERS:

Bore	1 1/2"	2"	2 1/2"	3 1/4"	4"	6"
Rod Diam.	5/8"	5/8"	5/8"	1"	1"	1 3/8"

Non Standard Piston Rods: Special rod threads or extensions are available. Please enclose a sketch of what you require.





Note: Stroke costs vary with differing bore sizes. Extra charges may be incurred for fractional strokes and strokes over 12".

SELECT A MOUNTING STYLE

	Mead Code	Bore Diameter						NFPA Code	Description
		1 1/2"	2"	2 1/2"	3 1/4"	4"	6"		
Flush Bottom	 FB	•	•	•	•	•	•	MS-4	Four tapped holes on bottom of cylinder.
Long Clevis	 PB	•	•	•	•	•	•	MP-2	Two ears extend from rear head; (clevis is detachable)
Short Clevis	 PF	•	•	•	•	•	NA	MP-1	Two ears extend from rear head (clevis is detachable).
Pivot	 PE	•	•	•	•	•	•	MP-4	A single ear extends from rear head; (pivot is detachable)
Tie Rods Ext. Front	 TIF	•	•	•	•	•	•	MX-3	All four tie-rods extend forward from cylinder face. Consult factory for rear extended tie-rods (or both ends).
Front Flange NFPA Std.	 FH	•	•	•	•	•	•	MF-1	Flange plate extends beyond the front head.
Rear Flange	 FR	•	•	•	•	•	•	MF-2	Flange plate extends beyond the rear head.
Trunnion Front	 TF	•	•	•	•	•	•	MT-1	Two pivot bars extend from two sides of front head. Not available with front Inter-Pilots® or front cushions.
Trunnion Rear	 TR	•	•	•	•	•	•	MT-2	Two pivot bars extend from two sides of rear head. Not available with rear Inter-Pilots® or rear cushions.
Foot	 FT	•	•	•	•	•	•	Non Std.	A plate with two holes is mounted to the bottom of each head.

STEP 4:

SELECT CYLINDER OPTIONS


	Mead Code	Bore Diameter						Description
		1 1/2"	2"	2 1/2"	3 1/4"	4"	6"	
Double Rod 	DR	•	•	•	•	•	•	Rod extends through both heads: (adds to cylinder rigidity)
Cushions (Not available with Trunnion Mount) 	Front CF Rear CR Both CB	•	•	•	•	•	•	Dampen the impact and sound that occur at stroke completion; cushions are adjustable.
Inter-Pilots (Not available with Trunnion Mount) 	Front IPF Rear IPR Both IPB	•	•	•	•	•	•	Inter-Pilots emit an air signal at the end of each stroke; Integral with cylinder head; Note: Not available on hydraulic cylinders.
Non-Rotating Rod (6" Max.Stroke) 	NR	NA	NA	NA	•	•	•	Internal bar prevents piston and rod rotation.
Non-Lube Seals 	NL	•	•	•	•	•	•	Self-Lubricating seals are used in place of standard Buna N seals; Note: Not available on hydraulic cylinders.
High Temp. Seals (Viton) 	VI	•	•	•	•	•	•	Viton seals are suitable for high temperature environments (400°F Max.)
Magnetic Pistons 	MP	•	•	•	•	•	•	Enables Reed & Solid State switches to sense piston location. Note: Reed switch/Solid State not available on all hydraulic cylinders. (Contact Mead)

STEP 5:

BUILD A MODEL NUMBER

Model Number Stroke Mounting Style Options


DM2-200 x 10 - PB - CF

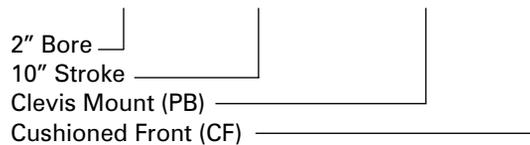

When ordering Dyna-mation cylinders, list the:

1. Model Number
2. Stroke
3. Mounting Style
4. Options (If Needed)

Accessories

	Bore Diameter	1 1/2"	2"	2 1/2"	3 1/4"	4"	6"
 Flex Rod Couplers	DMA-437	DMA-437	DMA-437	DMA-437	DMA-750	DMA-750	DMA-1000
 Forged Rod Clevis	DMC-1	DMC-1	DMC-1	DMC-1	NA	NA	NA
 Rod Clevis (NFPA Std.)	DMC-2	DMC-2	DMC-2	DMC-2	DMC-4	DMC-4	DMC-6
 Machined Rod Eye (NFPA Std.)	DME-1	DME-1	DME-1	DME-1	DME-2	DME-2	DME-3
 Pivot Bracket	DMP-1	DMP-2	DMP-3	DMP-4	DMP-5	DMP-8	DMP-8
 Clevis Bracket (with Pin)	DMR-1	DMR-2	DMR-3	DMR-4	DMR-5	DMR-8	DMR-8

NOTE: DMP and DMR Pivot and Clevis brackets do not include any mounting hardware. See page 41 for mount kits.

Solid State Switches

Sourcing

For DM1 series: CS-6200P

For DM2 series: CS-7500P

Sinking

For DM1 series: CS-6200N

For DM2 series: CS-7500N

Lead length 3 meters.

Cylinders must have a magnetic piston (MP). For technical information, see page 33.

Reed Switches

For DM1 series: CS-6200R

For DM2 series: CS-7500R

Plain Wire Leads

Cylinders must have a magnetic piston (MP). For technical information, see page 35.



Special Cylinders

We invite inquiries regarding non-standard cylinders. Please call or your local Mead representative.

Toll-free 877-MEAD USA

Basic Cylinder



Foot Mount Plate Model FT

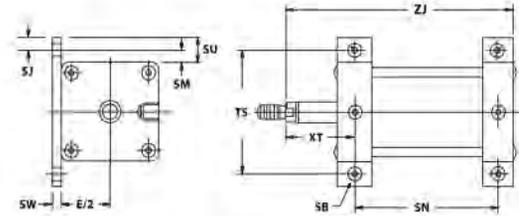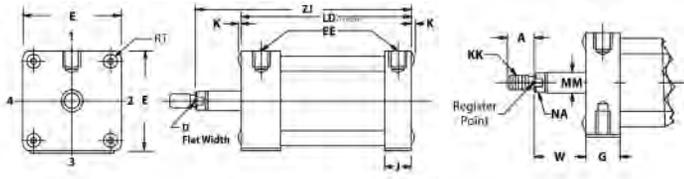

NOTE: DM1 Cylinders are constructed with sleeve nuts; use RT, K does not exist. DM2 use K; RT does not exist.



Bottom Flush Model FB

Double Rod Model DR

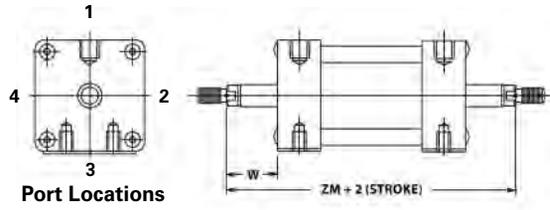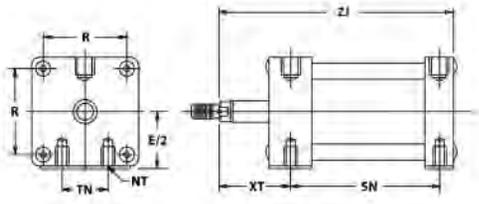



Rod End Trunnion Model TF

Blind End Trunnion Model TR

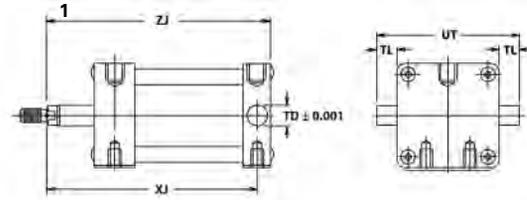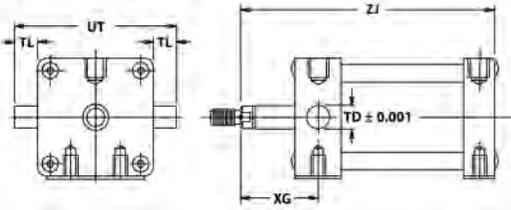



Clevis Model PB and PF

Pivot Model PE

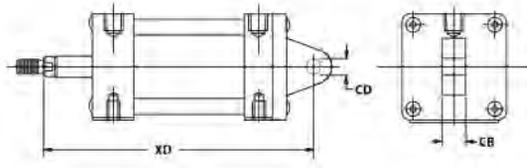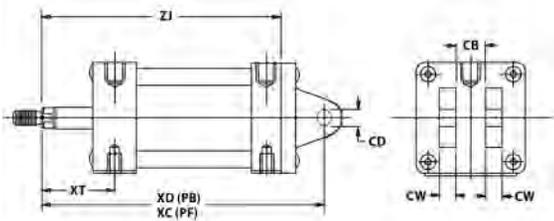

Rod End Flange Model FH*

Blind End Flange Model FR*

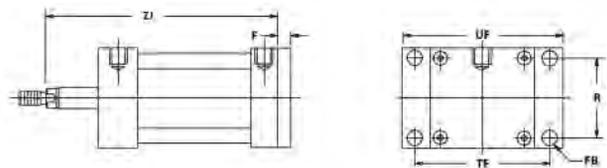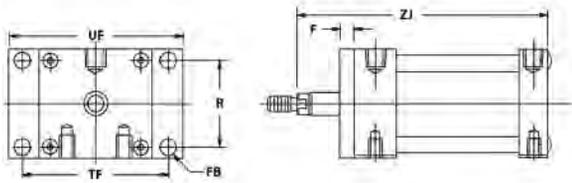

Note: For dimensions of nose mount and tie rod extended models, consult factory.

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index

Bore	1 1/2	2	2 1/2	3 1/4	4	6
A	3/4	3/4	3/4	1 1/8	1 1/8	1 5/8
CA	1 1/2	1 1/2	1 1/2	2 1/16	2 1/16	1
CB	3/4	3/4	3/4	1 1/4	1 1/4	1 1/2
CD	1/2	1/2	1/2	3/4	3/4	1
CE	1 1/2	1 1/2	1 1/2	2 3/8	2 3/8	3 1/8
CW	1/2	1/2	1/2	5/8	5/8	3/4
D	1/2	1/2	1/2	7/8	7/8	1 1/8
DD	17/64	23/64	23/64	7/16	7/16	1/2-20
E	2	2 1/2	3	3 3/4	4 1/2	6 1/2
EE(NPTF)***	1/4	1/4	1/4	1/2	1/2	3/4
F	3/8	3/8	3/8	5/8	5/8	3/4
FB	5/16	3/8	3/8	7/16	7/16	9/16
FL	1 1/8	1 1/8	1 1/8	1 7/8	1 7/8	2 1/4 Clevis
G	1 7/16	1 7/16	1 7/16	1 11/16	1 11/16	2
J	15/16	15/16	15/16	1 3/16	1 3/16	1 1/2
K	1/8	5/32	5/32	3/16	3/16	3/16
KK	7/16-20	7/16-20	7/16-20	3/4-16	3/4-16	1-14
LD	4 1/8	4 1/8	4 1/4	4 3/4	4 3/4	5 1/2
M	1/2	1/2	1/2	3/4	3/4	2 1/4 Clevis
MM	5/8	5/8	5/8	1	1	1 3/8
NA	19/32	19/32	19/32	31/32	31/32	1 5/16
NT	1/4-20	5/16-18	3/8-16	1/2-13	1/2-13	3/4-10
R	1 7/16	1 27/32	2 3/16	2 3/4	3 21/64	4 7/8
RT	1/4-28	5/16-24	5/16-24	3/8-24	3/8-24	1/2-20
SB	17/64	21/64	25/64	33/64	33/64	33/64
SJ	3/8	3/8	3/8	1/2	1/2	11/16
SM	3/8	3/8	3/8	1/2	1/2	11/64
SU	3/4	3/4	3/4	1	1	11/64
SW	3/16	3/16	1/4	1/4	1/4	7/64
TD	1	1	1	1	1	1 3/8
TF	2 3/4	3 3/8	3 7/8	4 11/16	5 7/16	7 5/8
TK	3/8	1/2	9/16	3/4	3/4	1 1/8
TL	1	1	1	1	1	1 5/8
TN	5/8	7/8	1 1/4	1 1/2	2 1/16	3 1/4
TS	2 3/4	3 1/4	3 3/4	4 3/4	5 1/2	7 7/8
UF	3 3/8	4 1/8	4 5/8	5 1/2	6 1/4	8 5/8
UT	4	4 1/2	5	5 3/4	6 1/2	9 1/4
W	1	1	1	1 3/8	1 3/8	1 5/8
XT	1 15/16	1 15/16	1 15/16	2 7/16	2 7/16	2 13/16
XG	1 3/4	1 3/4	1 3/4	2 1/4	2 1/4	2 13/16
H	1 1/4	1 1/4	1 1/4	1 3/4	1 3/4	2 1/2
HA	2	2	2	2 5/16	2 5/16	2 15/16
HB	1/2	1/2	1/2	1/2	1/2	1/2
HC	3/4	3/4	3/4	1 1/8	1 1/8	1 5/8
HD	5/8	5/8	5/8	31/32	31/32	1 3/8
HE	1	1	1	1 1/2	1 1/2	2 1/4
HF	10,000	10,000	10,000	34,000	34,000	64,000


Note: * Add Stroke Length to Dimensions Below ** Add Twice Stroke to ZM Dimension

SN*	2 1/4	2 1/4	2 3/8	2 5/8	2 5/8	3 1/8
XC*	5 3/8	5 3/8	5 1/2	6 7/8	6 7/8	7 7/8
XD*	5 3/4	5 3/4	5 7/8	7 1/2	7 1/2	7 1/2
XJ*	4 1/8	4 1/8	4 1/4	5	5	5 7/8
ZJ*	4 5/8	4 5/8	4 3/4	5 5/8	5 5/8	6 5/8
ZM**	6 1/8	6 1/8	6 1/4	7 1/2	7 1/2	8 3/4


Note: For Inter-Pilot® port locations, see page 33.

*** For the 1-1/2", 2" and 2-1/2" Bores: 3/8" Ports Available Consult Factory.


DME Interchangeable Rod Eye




DMC Interchangeable Rod Clevis with Pin




DMR Clevis Bracket w/Pin

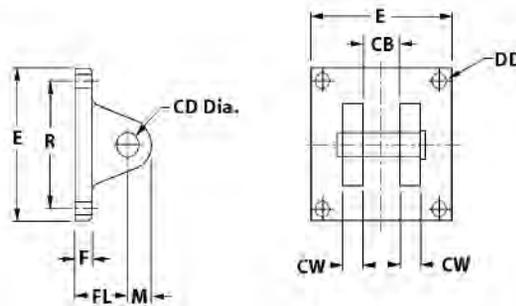


DMP Pivot Bracket

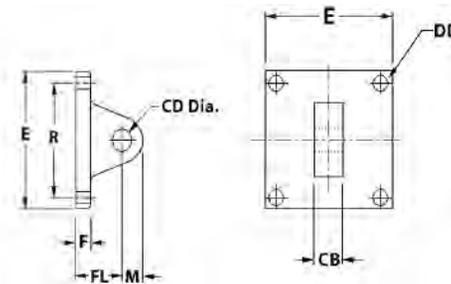

Self Aligning Rod Couplers



DMC-1 Forged Rod Clevis w/Pin 1/2" through 2 1/2" bores



Cylinders For Abusive Conditions

Combining NFPA dimensional interchangeability and high quality components, the "HD1" Series offers excellent performance and long service life, even in the most severe of conditions.

External Bearing Ensures Smooth Motion

HD1 cylinders are fitted with a heavy-duty external rod bearing in the rod end head. Teflon®-impregnated and hardcoat anodized, this bearing ensures smooth rod motion while maintaining rod rigidity and stability. The entire rod gland and bearing may be quickly removed and replaced without disassembling the cylinder.

Operating Specifications

Temperature Range: -40°F to +250°F (to +400°F on request)

Lubrication: For maximum cylinder life, non-detergent petroleum based oil is recommended.
Non-lube seals available.

Filtration: Not essential, but a standard 40 micron filter placed upstream will prolong seal life.



Operating Parameters

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam.	Max. Oper. Pressure	
				Air	Oil ‡
1 1/2"	177	1.77	5/8" or 1"	250	1000
2"	314	3.14	5/8" or 1"	250	1000
2 1/2"	491	4.91	5/8" or 1"	250	1000
3 1/4"	830	8.30	1" or 1 3/8"	250	700
4"	1257	12.57	1" or 1 3/8"	250	650
6"	2827	28.27	1 3/8" or 1 3/4"	250	435

*Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. Note: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize your cylinder by about 25% to assure smooth operation.

**To determine cylinder thrust at other inlet pressures, multiply this factor times the desired inlet pressure.

‡HD1 Cylinders are not rated or approved for use in a hydraulic circuit where an impulse or pressure spike may occur.

Cylinder Construction

Rod Bearing:

Teflon-impregnated, hardcoated aluminum

Heads:

Machined from solid aluminum bar; black anodized

Tubes:

Aluminum hard anodized to 60 Rc (16 RMS finish)

Piston:

Solid high alloy aluminum and fitted with a PTFE Wear Band.

Piston Rod:

High tensile ground and polished hard chrome plated steel

Piston and Rod Seals:

Wear compensating Buna N vee rings. Non-lube seals are also available (see Option NL).

Tube Seals:

Buna N o-rings

Rod Wiper

Dupont Teflon®

Tie Rods:

High tensile steel torqued to allow for flexure.

NOTE: 6" Bore Cylinders do not have wear bands. (HD)

Customize Your Cylinder

The HD1 Series offers numerous accessories and design options. With hundreds of possible combinations available, you can "design" your own cylinder for any application.

Cushions (CR, CF, CB)

For end-of-stroke load deceleration, specify cushions in either or both ends of your cylinder. Cushions decelerate the piston rod over the last 1¹/₁₆" of stroke. Adjustable, they allow you to set the degree of cushioning needed for each specific application.

A built-in check valve assures a fast getaway in the opposite direction. A pre-lubricated nitrile cushion seal provides years of reliable service.

Note: Cushions are not recommended on hydraulic cylinders.

Double Rod (DR)

Double rod cylinders have a common piston rod that protrudes from both ends of the cylinder. In addition to providing a dual power source, double rod cylinders serve to minimize rod deflection and to facilitate the control and adjustment of rod travel.

Inter-Pilots® (IP)




Mead's Inter-Pilot® is a miniature 3-way valve built in the cylinder head. Actuated by the cylinder's piston as it reaches the end of its stroke, the valve emits an air signal. Thus, sequencing is achieved without external limit switches and electric wiring.

Inter-Pilots may be built into either or both cylinder heads. They are not for hydraulic use. Cylinder operating pressure must not exceed pressure used to feed the Inter-Pilot®.

INTER-PILOT® PORT LOCATIONS (Port Size = 10-32)

Inter-Pilot port location style that is offered with each cylinder head

Bore (Either Head)	1 1/2"	2"	2 1/2"	3 1/4"	4"	6"
Non-Cushion	2	1	1	1	1	3
Cushion	2	1	1	1	1	3

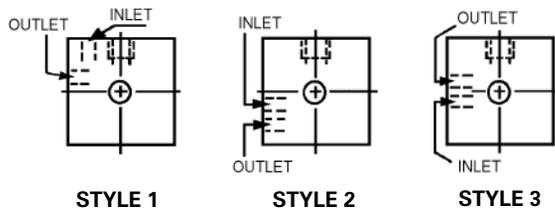

Non-Rotating Rod (NR)

For prevention of piston and rod rotation, an internal rod is embedded internally into both cylinder heads. This rod also passes through the piston and acts as a linear guide for the piston. Note: NR option available on 3 1/4", 4" and 6" bore cylinders only.

Viton™ Seals (VI)

For high temperature environments, Viton™ seals can be specified to replace standard Buna N seals. While HD1 cylinders are normally rated to 250°F, cylinders with Viton seals are rated to 400°F.

Low Breakaway Option (NL)

For non-lube service, polyurethane seals replace standard piston and rod seals. These specially formulated seals have an inherent lubricity that provides low breakaway between the piston and tube. Note: NL seals are not available on hydraulic cylinders.

Magnetic Piston (MP)

If you will be using either Solid State or Reed switches for sensing rod position, you will need to order your cylinder with a magnetic piston.

Mead's Solid State and Reed switches allow the cylinder user to sense rod position anywhere within the stroke. They emit an electrical signal when the magnetized piston reaches a point opposite their location. Tie rod mounting facilitates fast and accurate position setting.

Oversized Rod (OR)

Available on all models; the HD1-150, 200 and 250, you can order a 1" rod diameter rather than the standard 5/8" diameter; the HD1-325 and HD1-400 with a 1-3/8" rather than the standard 1"; the HD1-600 with a 1-3/4" rather than the standard 1-3/8".

Accessories

Pneumatic Stroke Completion Sensors (SCS)

Port mounted SCS valves emit an air signal when the cylinder rod has stopped even if the piston has not contacted the end cap. Ideal for use in situations where the full cylinder stroke is not used. See pg. 60.

Self Aligning Rod Couplers



Rod couplers simplify cylinder alignment problems by compensating for 2° angular error and 1/16" lateral misalignment on both extension and retraction strokes. Greater reliability is achieved by reducing cylinder and component wear. All components are heat treated for wear and corrosion resistance.

See page 32 for complete listing of Mead's self aligning rod couplers.

Flow Control Valves




Dyla-Trol® - For unprecedented smoothness in cylinder speed control, use Mead's Dyla-Trol® valves with a perfectly tapering flow. Where needle type flow controls generate turbulence as they close, Dyla-Trol maintains an even 360 laminar flow regardless of the setting. Pg. 62.



Right Angle Flow Controls (RAF) - RAF flow controls feature push-in-fittings, pre-applied Teflon® based thread sealant, a recessed screw driver adjustment and convenient swivel for ease of tubing alignment. See page 68.

Order HD1 Cylinder

STEP 1:




Select A Bore Size

Bore	1 1/2"	2"	2 1/2"	3 1/4"	4"	6"
Force*	177	314	491	830	1257	2827
Model	HD1-150	HD1-200	HD1-250	HD1-325	HD1-400	HD-600

* Maximum force output (lbs.) at 100 PSI inlet pressure

STEP 2:



Choose Stroke Length

PISTON ROD DIAMETERS:

Bore Diam.	1 1/2"	2"	2 1/2"	3 1/4"	4"	6"
Rod Diam.	5/8" or 1"	5/8" or 1"	5/8" or 1"	1" or 1 3/8"	1" or 1 3/8"	1 3/8" or 1 3/4"

Non-Standard Piston Rods: Special rod threads or extensions are available. Please enclose a sketch of what you require.

STEP 3:

Select A Mounting Style

	Image	Mead Code	Bore Diameter						NFPA Code	Description
			1 1/2"	2"	2 1/2"	3 1/4"	4"	6"		
Flush Bottom/Front Rear		FB	•	•	•	•	•	•	MS-4	Four tapped holes in bottom and in both cylinder faces (front and rear). Rear sleeve nuts standard.
Long Clevis		PB	•	•	•	•	•	•	MP-2	Two ears extend from rear head (clevis is detachable).
Short Clevis		PF	•	•	•	•	•	NA	MP-1	Two ears extend from rear head (clevis is detachable).
Pivot		PE	•	•	•	•	•	NA	MP-4	A single ear extends from rear head (pivot is detachable).
Tie Rods Ext. Front		TIF	•	•	•	•	•	•	MX-3	All four tie-rods extend forward from cylinder face. Consult factory for rear extended tie-rods (or both ends).
Front Flange NFPA Std.		FH	•	•	•	•	•	•	MF-1	Flange plate extends beyond the thicker front head.
Rear Flange		FR	•	•	•	•	•	•	MF-2	Flange plate extends beyond the rear head.
Trunnion Front		TF	•	•	•	•	•	•	MT-1	Two pivot bars extend from two sides of front head.; not available with front Inter-Pilots® or front cushions.
Trunnion Rear		TR	•	•	•	•	•	•	MT-2	Two pivot bars extend from two sides of rear head. Not available with rear Inter-Pilots® or rear cushions.
Foot		FT	•	•	•	•	•	•	Non Std.	A plate with two holes is mounted to the bottom of each head.

Reference

Control Valves

Cylinders

Specialty Valves





Production Devices

Accessories

Index

STEP 4:

Select Cylinder Options

	Mead Code	Bore Diameter						Description	
		1 1/2"	2"	2 1/2"	3 1/4"	4"	6"		
Double Rod		DR	•	•	•	•	•	•	Rod extends through both heads (adds to cylinder rigidity)
Oversized Rod		OR	•*	•	•	•	•	•	Standard rod is replaced by larger diameter rod.
Cushions (Not available with Trunnion)		Front (CF) Rear (CR) Both (CB)	•*	•	•	•	•	•	Dampen the impact and sound that occur at stroke completion; Adjustable; Note: Not available on hydraulic cylinders.
Inter-Pilots® (Not available with Trunnion)		Front (IPF) Rear (IPR) Both (IPB)	•	•	•	•	•	•	Inter-Pilots® emit an air signal at the end of each stroke; Integral with cylinder head; Note: Not available on hydraulic cylinders.
Non-Rotating Rod (6" Max.Stroke)		NR	NA	NA	NA	•	•	•	Internal bar prevents piston and rod rotation.
Non-Lube Seals		NL	•	•	•	•	•	NA	Self-lubricating seals are used in place of standard Buna N seals; Note: Not available on hydraulic cylinders.
High Temp. Seals		VI	•	•	•	•	•	NA	Viton seals are suitable for high temperature environments (400°F Max.)
Magnetic Pistons		MP	•	•	•	•	•	•	Enables Reed & Solid State switches to sense piston. Note: Reed switch/Solid State not available on all hydraulic cylinders. (Contact Mead)

* Cushions or Inter-Pilots® are not available on the rod end head of 1 1/2" bore cylinders with oversized rod.

STEP 5:

Build A Model Number

Base Model Stroke Mounting Style Options

HD1-200 - 10 - PB - CF

2" Bore
10" Stroke
Clevis Mount (PB)
Cushioned Front (CF)

When ordering Dyna-mation cylinders, list the:

1. Base Model
2. Stroke
3. Mounting Style
4. Options (If Needed)

Solid State Switches

Model CS-6200P
Sourcing
Model CS-6200N
Sinking

Cylinders must have a magnetic piston (MP). For technical information, see page 35.

Reed Switches






Model CS-6200R
Wire Leads

Cylinders must have a magnetic piston (MP). For technical information, see page 35.

Special Cylinders

We invite inquiries regarding non-standard cylinders. Please call or your local Mead representative.
Toll-free 877-MEAD USA

Accessories

	Bore Diameter:	Rod Size	1 1/2"	2"	2 1/2"	3 1/4"	4"	6"
				Flex Rod Couplers	STD OR	DMA-437 DMA-750	DMA-437 DMA-750	DMA-437 DMA-750
	Forged Rod Clevis	STD OR	DMC-1 NA	DMC-1 NA	DMC-1 NA	NA	NA	NA
	Rod Clevis (NFPA Std.)	STD OR	DMC-2 DMC-4	DMC-2 DMC-4	DMC-2 DMC-4	DMC-4 DMC-6	DMC-4 DMC-6	DMC-6 DMC-7
	Machined Rod Eye (NFPA Std.)	STD OR	DME-1 DME-2	DME-1 DME-2	DME-1 DME-2	DME-2 DME-3	DME-2 DME-3	DME-3 DME-7
	Pivot Bracket Kit	ALL	HD40-150	HD40-200	HD40-250	HD40-325	HD40-400	DMP-8 Bracket Only
	Short Clevis (with Pin)	ALL	HD35S-150	HD35S-200	HD35S-250	HD35S-325	HD35S-400	NA
	Long Clevis (with Pin)	ALL	HD35-150	HD35-200	HD35-250	HD35-325	HD35-400	DMR-8 Bracket Only
	Flange Mounting Kits (for front* or rear flanges)	ALL	HD45-150	HD45-200	HD45-250	HD45-325	HD45-400	NA



NOTE: All Kits include mounting hardware; for DMC-1 Dimensions see page 39; all others see page 47.

Basic Cylinder

NFPA: MXO

Double Rod

NFPA: MDXO

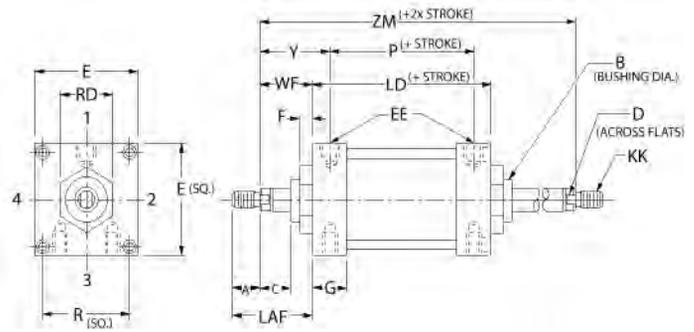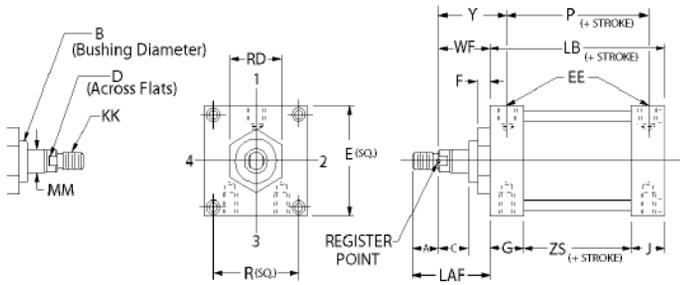


• EE Dimension is NPTF

* 6" bore HD cylinders have a rear tie rod nut, shown below as the "K" dimension. K = 7/16"

BORE	MM	A	B	C	D	E	EE	F	G	J	K	KK	LAF	LB	LD	P	R	WF	Y	ZS	ZM	RD
1 1/2	5/8	3/4	1 1/8	3/8	1/2	2	1/4	3/8	1 7/16	1 5/16	-	7/16-20	1 3/4	3 5/8	4 1/8	2 1/4	1 7/16	1	1 15/16	1 1/4	6 1/8	1 1/8
	1	1 1/8	1 1/2	5/8	7/8							3/4-16	2 1/2					1 3/8	2 5/16			
2	5/8	3/4	1 1/8	3/8	1/2	2 1/2	1/4	3/8	1 7/16	1 5/16	-	7/16-20	1 3/4	3 5/8	4 1/8	2 1/4	1 27/32	1	1 15/16	1 1/4	6 1/8	1 1/8
	1	1 1/8	1 1/2	5/8	7/8							3/4-16	2 1/2					1 3/8	2 5/16			
2 1/2	5/8	3/4	1 1/8	3/8	1/2	3	1/4	3/8	1 7/16	1 5/16	-	7/16-20	1 3/4	3 3/4	4 1/4	2 3/8	2 3/16	1	1 15/16	1 3/8	6 1/4	1 1/2
	1	1 1/8	1 1/2	5/8	7/8							3/4-16	2 1/2					1 3/8	2 5/16			
3 1/4	1	1 1/8	1 1/2	3/8	7/8	3 3/4	1/2	5/8	1 11/16	1 3/16	-	3/4-16	2 1/2	4 1/2	4 3/4	2 5/8	2 3/4	1 3/8	2 7/16	1 3/8	7 1/2	1 3/4
	1 3/8	1 5/8	2	1 1/2	1 1/8							1-14	3 1/4					1 3/8	2 11/16			
4	1	1 1/8	1 1/2	1/2	7/8	4 1/2	1/2	5/8	1 11/16	1 3/16	-	3/4-16	2 1/2	4 1/2	4 3/4	2 5/8	3 21/64	1 3/8	2 7/16	1 3/8	7 1/2	1 3/4
	1 3/8	1 5/8	2	5/8	1 1/8							1-14	3 1/4					1 3/8	2 11/16			
6	1 3/8	1 5/8	2	5/8	1 1/8	6 1/2	3/4	3/4	2	1 1/2	7/16	1-14	3 1/4	5	5 1/2	3 1/8	4 7/8	1 5/8	2 13/16	1 1/2	8 3/4	2
	1 3/4	2	2 3/8	3/4	1 1/2							1 1/4-12	3 7/8					1 7/8	3 1/16			

Rear, Front & Bottom Tapped (FB)



NFPA: MS4

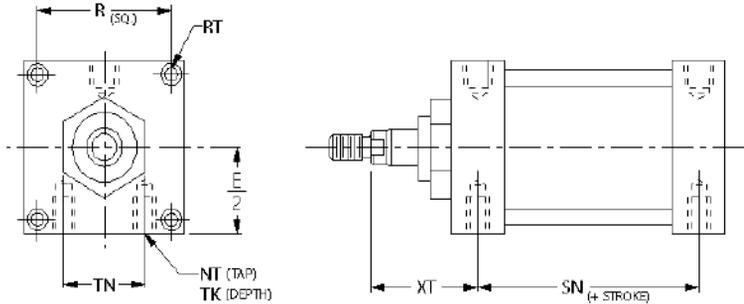

BORE	MM	ROD DIA.	NT	RT	TK	TN	SN	XT
1 1/2	5/8		1/4-20	1/4-28	3/8	5/8	2 1/4	1 15/16
	1							2 5/16
2	5/8		5/16-18	5/16-24	1/2	7/8	2 1/4	1 15/16
	1							2 5/16
2 1/2	5/8		3/8-16	5/16-24	9/16	1 1/4	2 3/8	1 15/16
	1							2 5/16
3 1/4	1		1/2-13	3/8-24	3/4	1 1/2	2 5/8	2 7/16
	1 3/8							2 11/16
4	1		1/2-13	3/8-24	3/4	2 1/16	2 5/8	2 7/16
	1 3/8							2 11/16
6	1 3/8		3/4-10	1/2-20	1 1/8	3 1/4	3 1/8	2 13/16
	1 3/4							3 1/16



Front Flange (FH)

NFPA: MF1



Rear Flange (FR)



NFPA: MF2

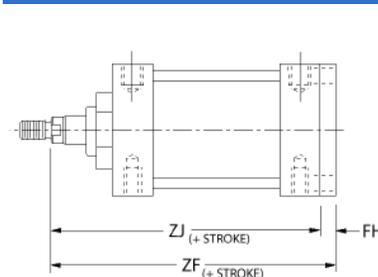

BORE	MM ROD DIA.	E	FB (BOLT)	FH	R	TF	UF	W	ZJ	ZF
1 1/2	5/8	2	5/16	3/8	1 7/16	2 3/4	3 3/8	5/8	4 3/8	5
	1							5	5 3/8	
2	5/8	2 1/2	3/8	3/8	1 27/32	3 3/8	4 1/8	5/8	4 5/8	5
	1							5	5 3/8	
2 1/2	5/8	3	3/8	3/8	2 3/16	3 7/8	4 5/8	5/8	4 3/4	5 1/8
	1							5 1/8	5 1/2	
3 1/4	1	3 3/4	7/16	5/8	2 3/4	4 11/16	5 1/2	3/4	5 5/8	6 1/4
	1 3/8							5 7/8	6 1/2	
4	1	4 1/2	7/16	5/8	3 21/64	5 7/16	6 1/4	3/4	5 5/8	6 1/4
	1 3/8							5 7/8	6 1/2	
6	1 3/8	6 1/2	9/16	3/4	4 7/8	7 5/8	8 5/8	7/8	6 5/8	7 3/8
	1 3/4							6 7/8	7 5/8	



Short Clevis (PF)

NFPA: MP1

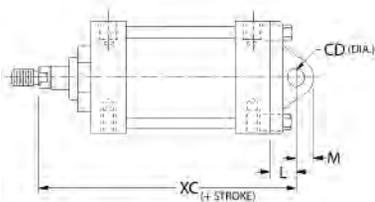


Long Clevis (PB)

NFPA: MP2

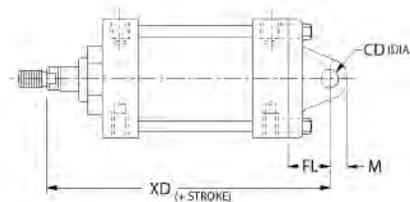

Pivot (PE)


NFPA: MP4

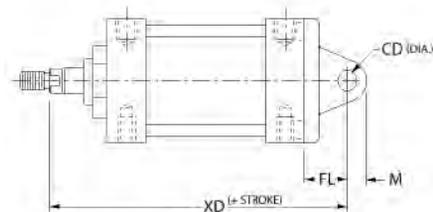

BORE	MM ROD DIA.	CB	CD	CW	FL	L	M	XC	XD
1 1/2	5/8	3/4	1/2	1/2	1 1/8	3/4	1/2	5 3/8	5 3/4
	1							5 3/4	6 1/8
2	5/8	3/4	1/2	1/2	1 1/8	3/4	1/2	5 3/8	5 3/4
	1							5 3/4	6 1/8
2 1/2	5/8	3/4	1/2	1/2	1 1/8	3/4	1/2	5 1/2	5 7/8
	1							5 7/8	6 1/4
3 1/4	1	1 1/4	3/4	5/8	1 7/8	1 1/4	3/4	6 7/8	7 1/2
	1 3/8							7 1/8	5 3/4
4	1	1 1/4	3/4	5/8	1 7/8	1 1/4	3/4	6 7/8	7 1/2
	1 3/8							7 1/8	7 3/4
6	1 3/8	1 1/2	1	3/4	2 1/4 Clevis	-	1 1/8 Clevis	NA	8 7/8
	1 3/4								9 1/8


Extended Tie Rods, Both Ends (TIB)

NFPA: MX1

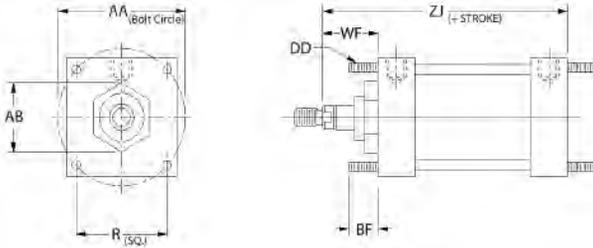


Back End (TIR)

NFPA: MX2

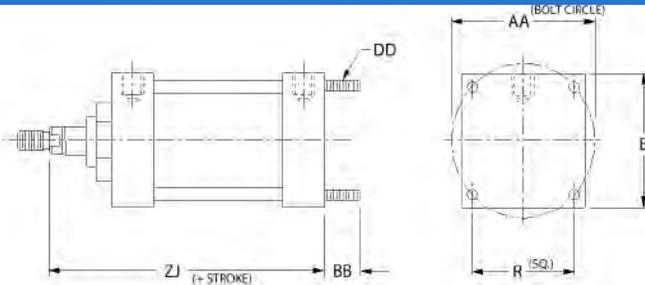

Rod End (TIF)


NFPA: MX3

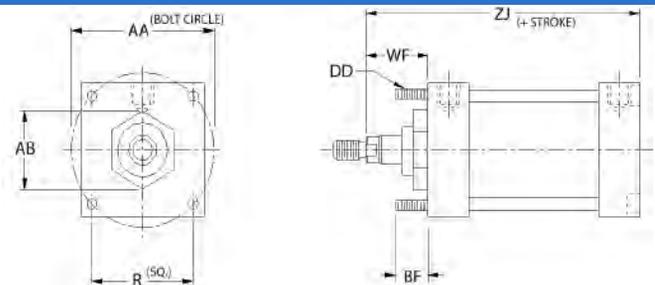

BORE	MM ROD DIA.	AA	BB	AB	BF	DD	R	ZJ
1 1/2	5/8	2.02	1	1 5/16	1 3/8	1/4-28	1 7/16	4 5/8
	1							5
2	5/8	2.6	1 1/8	1 5/16	1 1/2	5/16-24	1 27/32	4 5/8
	1							5
2 1/2	5/8	3.1	1 1/8	1 3/4	1 1/2	5/16-24	2 3/16	4 3/4
	1							5 1/8
3 1/4	1	3.9	1 3/8	2 1/32	2	3/8-24	2 3/4	5 5/8
	1 3/8							5 7/8
4	1	4.7	1 3/8	2 1/32	2	3/8-24	3 21/64	5 5/8
	1 3/8							5 7/8
6	1 3/8	6.9	1 13/16	2 5/16	2 9/16	1/2-20	4 7/8	6 5/8
	1 3/4							6 7/8


Front Trunnion (TF)

NFPA: MT1

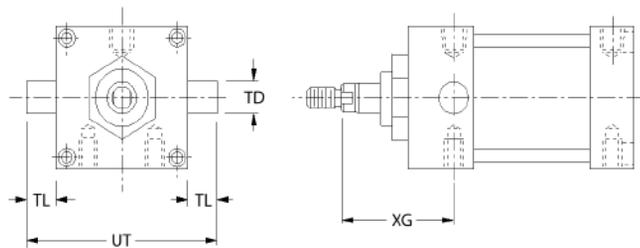


Rear Trunnion

NFPA: MT2

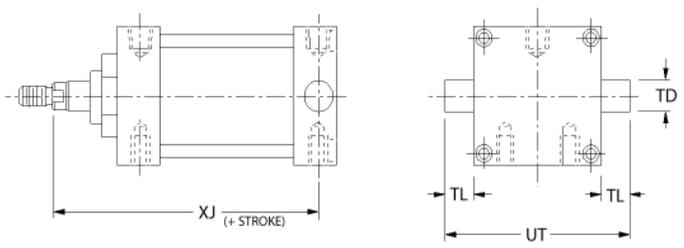


BORE	MM ROD DIA.	TD ± .001	TL	UT	XG	XJ
1 1/2	5/8	1	1	4	1 3/4	4 1/8
	1				2 1/8	4 1/2
2	5/8	1	1	4 1/2	1 3/4	4 1/8
	1				2 1/8	4 1/2
2 1/2	5/8	1	1	5	1 3/4	4 1/4
	1				2 1/8	4 5/8
3 1/4	1	1	1	5 3/4	2 1/4	5
	1 3/8				2 1/2	5 1/4
4	1	1	1	6 1/2	2 1/4	5
	1 3/8				2 1/2	5 1/4
6	1 3/8	1 3/8	1 3/8	9 1/4	2 5/8	5 7/8
	1 3/4				2 7/8	6 1/8

Clevis Bracket

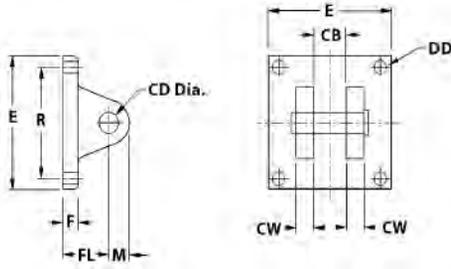


Pivot Bracket

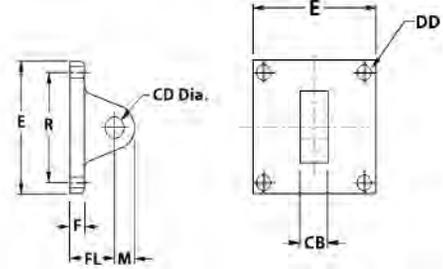


BORE	CB	CD	CW	DD	E	FL	M	R
1 1/2	3/4	1/2	1/2	17/64	2	1 1/8	1/2	17/16
2	3/4	1/2	1/2	23/64	2 1/2	1 1/8	1/2	1 27/32
2 1/2, 2 1/2*	3/4	1/2	1/2	23/64	3	1 1/8	1/2	2 3/16
3 1/4	1 1/4	3/4	5/8	7/16	3 3/4	1 7/8	3/4	2 3/4
4	1 1/4	3/4	5/8	7/16	4 1/2	1 7/8	3/4	3 21/64
6	1 1/2	1	3/4	17/32 Clevis 2 1/32 Pivot	6 1/2 Clevis 4 1/2 Pivot	2 1/4	1 1/8 Clevis 1 1/4 Pivot	4 7/8


Rod Clevis

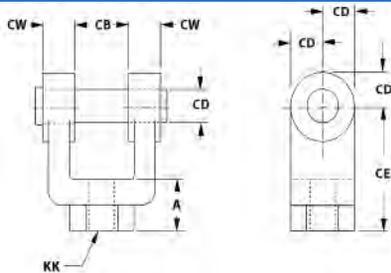

Rod Eye

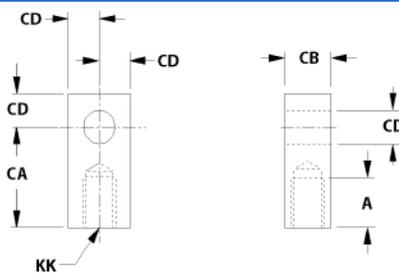

Rod Coupler

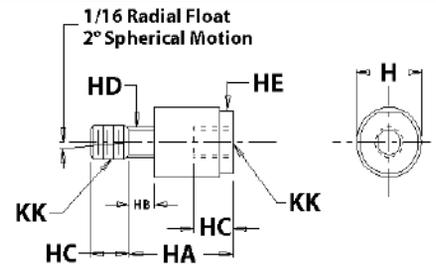

Part # Rod Clevis Rod Eye Rod Coupler	Cylinder	A	CA	CB	CD	CE	CW	KK	H	HA	HB	HC	HD	HE
DMC-2	HD1-150													
DME-1	HD1-200	3/4	1 1/2	3/4	1/2	1 1/2	1/2	7/16-20	1 1/4	2	1/2	3/4	5/8	1 1/8
DMA-437	HD1-250													
DMC-4	HD1-150 OR													
DME-2	HD1-200 OR	1 1/8	2 1/16	1 1/4	3/4	2 3/8	5/8	3/4-16	1 3/4	2 5/16	5/16	1 1/8	3 1/32	1 1/2
DMA-750	HD1-250 OR													
DMC-6	HD1-325 OR													
DME-3	HD1-400 OR	1 5/8	2 13/16	1	1	3 1/8	3/4	1-14	2 1/2	2 15/16	1/2	1 5/8	1 3/8	2 1/4
DMA-1000	HD-600													
DMC-7	HD-600 OR	1 5/8	3 7/16	2	1 3/8	4 1/8	1	1 1/4-12	2 1/2	2 15/16	1/2	1 5/8	1 3/8	2 1/4
DME-7														
DMA-1250														



Large Bore Cylinders For Abusive Conditions

Combining NFPA dimensional interchangeability and high quality components, the HD Large Bore Series offers excellent performance and long service life, even in the most severe of conditions. Mead offers 5", 8", 10" and 12" bore sizes to meet your needs.

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam.	Max. Operating Pressure Air
5"	1964	19.64	1" or 1 3/8"	250 PSI
8"	5027	50.27	1 3/8" or 1 3/4"	200 PSI
10"	7854	78.54	1 3/4" or 2"	200 PSI
12"	11310	113.1	2" or 2 1/2"	200 PSI


*Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. (Use 15% when Oversized Rods are chosen) Note: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize you cylinder by about 25% to assure smooth operation.

**To determine cylinder thrust at other inlet pressures, multiply this factor times the desired inlet pressure.


‡HD Cylinders are not rated or approved for use in a hydraulic circuit where an impulse or pressure spike may occur.

Dimensions


Bottom Flush Model FB

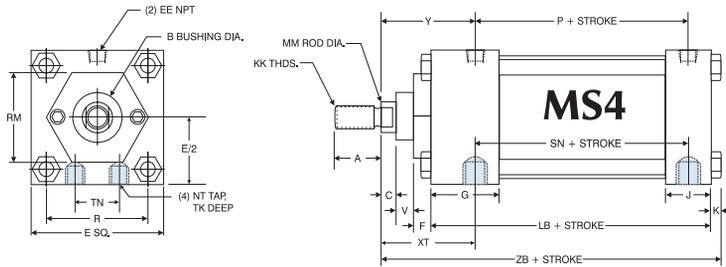


Double Rod Model DR

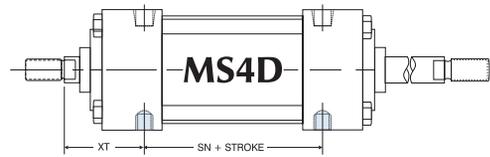

Rod End Flange Model FH (5" Bore Only)

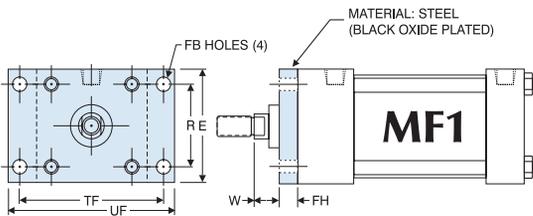

Blind End Flange Model FR (5" Bore Only)

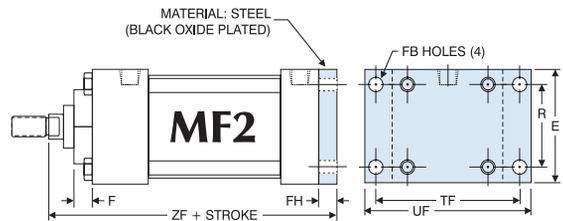

BORE	ROD		A	AA	B	BB	C	CB	CD	CW	DD	E	EE	E/2	F	FB	FH	FL	G	J	K	KK	L	LB	M	MM	NT	P	R	RM	SB
	DIA	1.13																													
5	1 STD	1.13	5.8	1.50	1.81	.50	1.25	.75	.63	.50-20	5.50	.50	2.75	.63	.56	.63	1.88	.175	.125	.44	.75-16	1.25	4.50	.88	1	.63-11	3	4.10	2.75	.81	
	1.38 OR	1.63																													
8	1.38 STD	1.63	9.1	2	2.31	.63	1.50	1	.75	.63-18	8.50	.75	4.25	.63	.69	.63	N/A	2	1.50	.56	1-14	1.50	5.13	1	1.75	.75-10	3.38	6.44	3.50	.81	
	1.75 OR	2																													
10	1.75 STD	2	11.2	2.38	2.69	.75	2	1.38	1	.75-16	10.6	1	5.31	.63	.81	.63	N/A	2.25	2	.69	1.25-12	2.13	6.38	1.38	1.75	1-8	4.31	7.92	3.50	.81	
	2 OR	2.25																													
12	2 STD	2.25	13.3	2.63	2.69	.88	2.50	1.75	1.25	.75-16	12.75	1	6.38	.75	.81	.75	N/A	2.25	2	.69	1.50-12	2.25	6.88	1.75	2	1-8	4.81	9.40	5	.81	
	2.50 OR	3																													

Floating Rod Bushing – Precision machined from 150,000 PSI rated graphite filled cast iron and PTFE coated to reduce friction and extend cycle life. Bushing design “traps” lubrication in effective bearing area.

Head, Cap & Retainer – Precision machined from high strength 6061-T6 aluminum alloy.

Cylinder Tube – Precision machined from 6063-T6832 high tensile aluminum alloy and hard coat to 60 Rc for wear resistance and extended cycle life.

Piston Rod – Precision machined from high yield, polished and hard chrome plated steel.

Piston & Rod Seals – Heavy lip design Carboxilated Nitrile construction. Seals are pressure activated and wear compensating for long life. (Self lubricating material).

Rod Wiper – Abrasion resistant urethane provides aggressive wiping action in all environments. External lip design prevents debris from entering cylinder.

Piston – Precision machined from 6061-T651 alloy aluminum, provides an excellent bearing surface for extended cylinder life.

Tie Rods – Prestressed high carbon steel tie rod construction eliminates axial loading of cylinder tube and maintains compression on tube and end seals.

Permanent Lubrication – Permanently lubricated with Magna-Lube G PTFE based grease on all internal components. This is a non-impregnatory type high performance grease providing outstanding service life. No additional lubrication is required.

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index

How To Order

HD-800 x 10 - FB - DR

Base Model

- HD-500 (5" Bore)
- HD-800 (8" Bore)
- HD-1000 (10" Bore)
- HD-1200 (12" Bore)

Stroke

State Fractional Strokes as decimals (i.e. 10.5)


Mounting

Options


- DR  Double Rod
- VI  Viton Seals
- CF  Front Cushions
- CR  Rear Cushions
- CB  Cushions Both Ends
- MP  Magnetic Piston

Description	NFPA Code	Restrictions	Description	NFPA Code	Restrictions
FB Four tapped holes in bottom	MS-4	None	PF Two Ears extend from rear head	MP-2	None
FH Flange Plate extends beyond front head	MF-1	None	TIF Four Tie Rods extend forward	MX-3	None
FR Flange Plate extends beyond rear head	MF-2	None	TF Pivot bars extend from two sides of front head	MT-1	None
FT Lugs extend from bottom of head	MS-2	None	TR Pivot bars extend from two sides of rear head	MT-2	None
PB Two Ears extend from rear head (detachable)	MP-1	12" Not Available			


Foot Mount Model FT

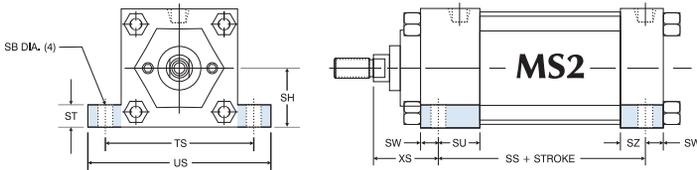


Clevis Mount Model PB

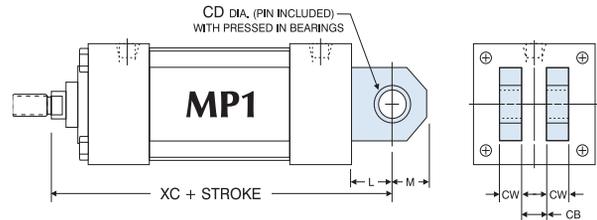


Clevis Mount Model PF

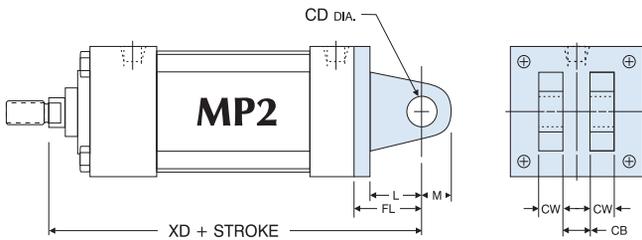


Tie Rods Extended Front Model TIF

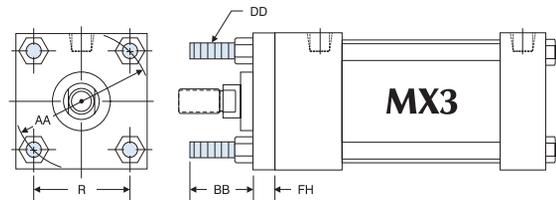

Trunnion Front Mount Model TF

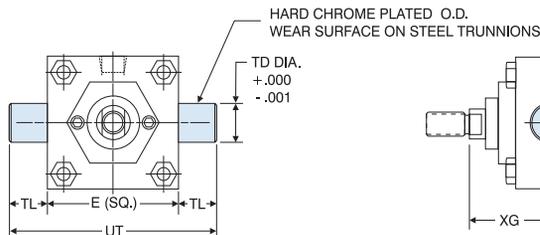

Trunnion Rear Mount Model TR

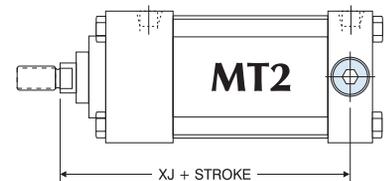

Note: Consult factory for additional mounting options.

BORE	ROD DIA	SH	SN	SS	ST	SU	SW	SZ	TD	TE	TF	TK	TL	TN	TS	UF	UM	US	UT	V	W	XC	XD	XG	XJ	XS	XT	Y	ZB	ZF
5	1 STD	275	2.88	3.73	1	1.06	.69	.56	1	6.63	1	1	2.69	6.88	7.63	8.25	8.25	7.50	.25	.75	7.13	7.75	2.25	5.25	2.06	2.44	2.38	6.31	6.50	
	1.38 OR																													.38
8	1.38 STD	425	3.25	3.75	1	1.31	.69	.81	1.38	7.57	N/A	1.13	1.38	4.50	9.88	N/A	12.50	11.25	11.25	.38	1.63	8.25	N/A	2.63	6	2.31	2.81	2.75	7.31	6.75
	1.75 OR																													
10	1.75 STD	425	3.25	3.75	1	1.31	.69	.81	1.38	7.57	N/A	1.13	1.38	4.50	9.88	N/A	12.50	11.25	11.25	.50	1.88	10.38	N/A			3.13	3.06	8.94	8.25	
	2 OR																													.38
12	2 STD	425	3.25	3.75	1	1.31	.69	.81	1.38	7.57	N/A	1.13	1.38	4.50	9.88	N/A	12.50	11.25	11.25	.38	2	11.13	N/A			3.25	3.19	9.56	8.88	
	2.50 OR																													.50



C-112 PB


C-150 NS

Low Cost Mounting


Flush bottom cylinder mounts directly onto a base plate with only two bolts...needs no mounting brackets or other hardware. The pivot bracket is built-in for easy pivoting at the inlet axis. The bracket pivots within the cylinder length to save space and to eliminate one entire bracket that would be needed to mount other cylinders.

Because Centaur's trunnions serve both as mounts and as assembly elements, they cost less than any other trunnion mount on the market.


Flush Bottom (FB)




Pivot Bracket (PB)




Trunnion Rear (TR) Trunnion Front (TF)



Flush Front (FF) 1 1/2", 2", 2 1/2" & 3" bores only




Flush Rear (FR) 1 1/8" bore only




Flush Rear (FR) 1 1/2", 2", 2 1/2" & 3" bores only



Pivot Extended (PE) 1 1/8", 1 1/2" & 2" bores only



Threaded Nose (NS) Std. on all 1 1/8" bore mounts 1 1/8", 1 1/2" & 2" bores only



Technical Specifications

Pressure: 150 PSI Air, 250 PSI Hydraulic

Bore Sizes: 1 1/8", 1 1/2", 2", 2 1/2" and 3"

Body: Hard Coated Aluminum

Rod Bearing: Oil Impregnated Porous Bronze


Temperature Range: -40°F to +250°F (to +400°F on request)

Economical & Repairable

Mead Centaur cylinders are built to match tie-rod performance, but are up to 45% less expensive and offer lubrication-free service. Centaur cylinders are not permanently crimped like most other round cylinders...so they can be disassembled for maintenance.

Teflon® Seals Create Smooth Breakaway

Centaur's unique Teflon® piston seal eliminates the forward lurch that occurs when rubber seals breakaway from the cylinder tube surface. Rod motion remains smooth throughout the stroke.



Non-Lube

During the cylinder break-in period, molecules from the unique graphite-filled Teflon® piston seal became embedded in the pores of the hard coated aluminum cylinder tube. This forms a long-lasting, super-smooth, self-lubricated surface.

Built-In Bumpers Absorb Impact



Rubber bumpers are built into each cylinder head to eliminate the metallic "clank" that occurs at stroke completion.

Self Aligning Rod Couplers



Rod couplers simplify cylinder alignment problems by compensating for 2° angular error and 1/16" lateral misalignment on both extension and retraction strokes.

See page 32 for complete listing of Mead's self aligning rod couplers.

Model	C-112	C-150	C-200	C-250	C-300
Rod Coupler	DMA-312	DMA-500	DMA-625	DMA-750	DMA-1000

Proximity Switches




Solid State & Reed switches can sense rod position anywhere within the stroke. A stainless steel clamp facilitates mounting at any location along the cylinder tube. Switches may be used singly or in multiples and positioned at any point around the cylinder tube. The cylinder must have a magnetic piston. For technical information see pg. 35.


Model	C-112	C-150	C-200	C-250	C-300
Sinking	N/A	CS-6100N-150	CS-6100N-200	CS-6100N-250	CS-6100N-300
Sourcing	N/A	CS-6100P-150	CS-6100P-200	CS-6100P-250	CS-6100P-300
Reed	N/A	CS-6100R-150	CS-6100R-200	CS-6100R-250	CS-6100R-300

For exploded views of models visit our website at www.mead-usa.com

Basic Dimensions




Hall Effect




	Bore Sizes				
	1 1/8"	1 1/2"	2"	2 1/2"	3"
A	1 3/8	1 3/4	2 1/4	2 3/4	3 1/4
B	5/8	13/16	1 1/8	-	-
C1	5/8	1 5/8	1 7/8	-	-
C2	-	1 7/16	1 11/16	1 3/4	2 1/16
D	1/2	1 1/4	1 1/2	1 1/2	1 3/4
F	5/16	1/2	5/8	3/4	1
G	5/16-24	1/2-20	5/8-18	3/4-16	1-14
H	3/4-16	1-14	1 1/4-12	-	-
L	2 3/32	2 1/8	2 5/8	3 1/8	3 5/8
M	1/8 NPT*	1/4 NPSF	1/2 NPSF	3/4 NPSF	1/2 NPSF
N	7/16	51/64	51/64	51/64	51/64
P+Stroke	1 21/64	1 27/32	1 59/64	2 3/64	2 11/64
Q+Stroke	2 13/64	3 1/16	3 1/2	3 5/8	3 3/4
R	10-32	3/8-24	3/8-24	3/8-24	3/8-24
Y	5/8	15/16	1 1/8	-	-
Z	3/8	11/16	3/4	-	-
AB	1/4	3/8	1/2	-	-
AC	3/8	9/16	5/8	-	-
AD	5/8	1	1 1/4	-	-
AE	-	1 1/8	1 1/2	1 3/4	2
AH	-	1/2	5/8	3/4	7/8
AJ	-	1/4-28	5/16-24	3/8-24	1/2-20
AK	1 5/8	2 1/4	2 3/4	2 7/8	3 1/8
AL	1 1/4	1 5/8	1 5/8	2 1/8	2 3/8
AN	1 3/4	2 13/32	2 29/32	3 13/32	3 29/32
AP	1	1 1/8	1 5/8	2 1/8	2 3/8
AQ	13/64	9/32	9/32	9/32	9/32
AR	31/32	1 1/16	1 13/16	1 15/16	2 1/16
AT	.418	.731	.731	.731	.731
AV	2 29/32	3 3/8	4 1/8	4 5/8	5 1/8
AW	2 17/64	2 13/16	3 5/16	3 13/16	4 5/16
YY+ (2 X STK)	4 23/32	6 5/16	6 7/8	7 1/8	7 1/8

* 1 1/8" bore model with trunnion mounts has 1/4-28 ports.

Flush Bottom (FB)




Pivot Bracket (PB)




Pivot Extended (PE)

1 1/8", 1 1/2" & 2" bores only




Flush Rear (FR)

1 1/8" bore only




Flush Rear (FR)

1 1/2", 2", 2 1/2" & 3" bores only




Flush Front (FF)

1 1/2", 2", 2 1/2" & 3" bores only




Threaded Nose (NS)


Std. on all 1 1/8" bore mounts
1 1/8", 1 1/2" & 2" bores only



Trunnion Rear (TR)




Trunnion Front (TF)



Accessories

Rod Clevis w/Pin (CEC)

1 1/8" & 1 1/2" bores



Nose Nuts (CN)

1 1/8", 1 1/2" & 2" bores only



Note: For DMC-4, refer to pages 45.

Air Reservoirs

Two Centaur rear heads and a tube form an economical air tank. Consult factory for more information. Simply add AR to model.

Ordering Information

When ordering Centaur cylinders, list the model number, stroke length and mounting option(s) required. Please consult the factory for stainless steel rods, air reservoirs or any special cylinder need.

C-112 - 4 - NS



Rod Clevis Accessory Dimensions

Bore	E	CA	CB	CE	DD
1 1/8"	-	19/64	11/32	1 3/16	5/16
1 1/2"	-	15/32	9/16	1 13/16	1/2
2"	1 1/4	7/16	5/8	2 1/16	1/2
2 1/2"	1 1/2	3/4	1 1/4	2 5/8	3/4
3"	1 3/4	7/16	5/8	2 1/16	1/2

Model Numbers

Bore Sizes Accessory	1 1/8"	1 1/2"	2"	2 1/2"	3"
Rod Clevis, Pin	CEC-112	CEC-150	CEC-200	DMC-4	CEC-300
Nose Nut	CN-112	CN-150	CN-200	-	-

Bore Model	1 1/8" C-112	1 1/2" C-150	2" C-200	2 1/2" C-250	3" C-300
Nose Mount (NS)				NA	NA
Flush Bottom (FB)					
Flush Front (FF)	NA				
Flush Rear (FR)					
Pivot Bracket (PB)					
Pivot Extended (PE)				NA	NA
Trunnion Front (TF)					
Trunnion Rear (TR)					
Other Options:					
Double Rod (DR)					
Dupont Viton Seals(VI)					
Magnetic Piston (MP)	NA				
Air Reservoir (AR)					

Nose (NS) mounts standard on both ends of 1 1/8" bore model with double rod.

Reference
Control Valves
Cylinders
Specialty Valves
Production Devices
Accessories
Index




Installation and Operation

Proximity switches provide contactless switching capabilities and allow you to sense cylinder rod position practically anywhere within the stroke. Switches are easily mounted on any point along the cylinder body. The switch will provide an electrical signal when subjected to the magnetic field created by a cylinder piston that is specially fitted with a captivated magnet.



Model Number	Switch Type	Switching Logic	Operating Voltage	Switching Current	Switching Power	Switching Drop	Magnetic Sensitivity
CS-7500R	Reed Switch	Normally Open SPST	5~240 VDC/VAC 50/60Hz	1 Amp. Max.	30 Watts Max.	3.5 V Max.	85 Gauss
CS-6100R							
CS-6200R							
CS-7500P	Solid-State (MR) Sensor	Normally Open	5~28 VDC	1 Amp. Max.	24 Watts Max.	1.5 V Max. (0.5 Amp)	85 Gauss
CS-6100P							
CS-6200P							
CS-7500N							
CS-6100N							
CS-6200N							

Connection Diagrams

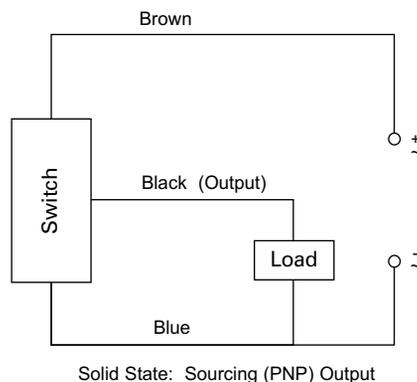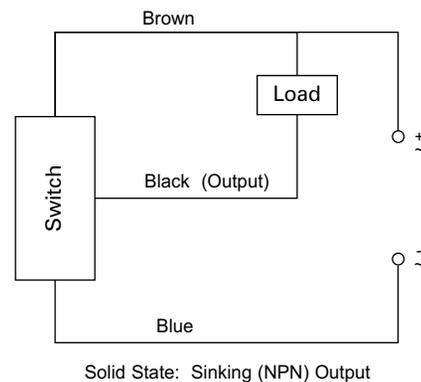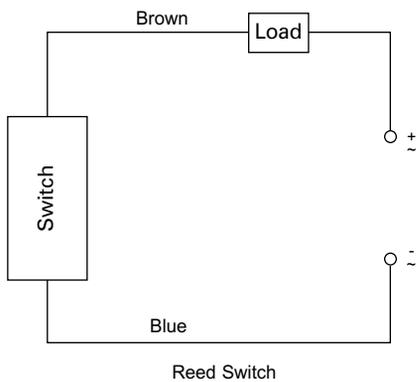



Offers A Wide Range Of Power


Bore	3/4"	1 1/8"	1 1/2"	2"	2 1/2"	3"	4"
Force @ 100 PSI (lbs.)	44	100	177	314	491	707	1257

NOTE: Pull force is approximately 10% less.

Mounting Options

Uniform base thickness makes mounting easy regardless of stroke.

Perfect For Tooling



Space Saver cylinders are ideal for use on drill fixtures and other automated tooling to provide compact, lightweight holding power.

Valving

Efficient 4-way LTV valves, shown on pages 26-27, are perfect as actuators of Space Saver cylinders. Valve hookup is made easy because the top cylinder port reindexes to any position.

Stroke Availability

Model	Bore	Stroke Lengths											
		1/8"	3/16"	1/4"	3/8"	1/2"	5/8"	3/4"	1"	1 1/2"	2"	2 1/2"	3"
SS-075	3/4"	X*	-	X*	X	X	X	X	X	X	X	-	-
SS-112	1 1/8"	X*	X*	X*	-	X	-	X	X	X	X	X	X
SS-150	1 1/2"	X*	-	X	-	X	-	X	X	X	X	X	X
SS-200	2"	X	-	X	-	X	-	X	X	X	X	X	X
SS-250	2 1/2"	X	-	X	-	X	-	X	X	X	X	X	X
SS-300	3"	X	-	X	-	X	-	X	X	X	X	X	X
SS-400	4"	X	-	X	-	X	-	X	X	X	X	X	X

* Includes special fitting

Note: To obtain a 1/8" or 3/16" stroke on 3/4" or 1 1/8" bore models, a 1/4" stroke cylinder is used and spacers are added.

Non-standard strokes subject to special machining charge.


Full Power In Half The Space

Space Saver cylinders provide the power and stroke of standard cylinders in less than half the space. They are ideally suited for use in machinery where space and weight are at a premium. Best of all, Space Saver cylinders cost up to 50% less than standard models.

Built To Last

- Oil impregnated sintered bronze rod bearing and hard chrome plated piston rod work together to prolong cylinder life.
- Hard coated cylinder bore eliminates cylinder wall scoring.

Dimensions

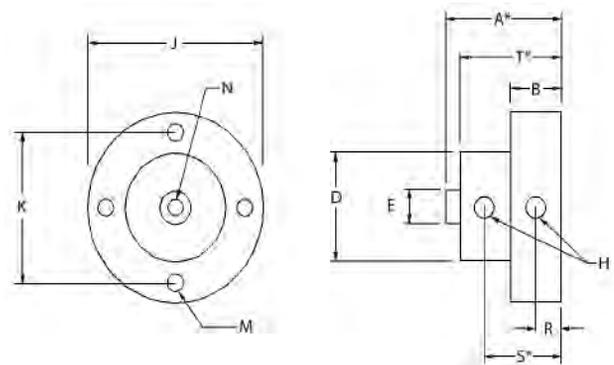

NOTE: 3/4" - 2" Bore Models have (2) Mounting Holes. See Dimension M.

Bore	3/4"	1 1/8"	1 1/2"	2"	2 1/2"	3"	4"
A*	49/64	25/32	59/64	1 1/16	1 5/64	1 25/64	1 17/32
B	1/2	1/2	1/2	9/16	9/16	3/4	3/4
D	1	1 3/8	1 3/4	2 1/4	2 3/4	3 1/4	4 1/4
E	5/16	1/2	1/2	5/8	5/8	3/4	3/4
H	10-32	10-32	10-32	1/8 NPT	1/8 NPT	1/8 NPT	1/8 NPT
J	1 3/4	2 1/8	2 1/2	3 1/8	3 3/4	4 1/4	5 1/4
K	1 13/32	1 25/32	2 5/32	2 23/32	3 1/4	3 25/32	4 25/32
M	13/64 (2)	13/64 (2)	13/64 (2)	13/64 (2)	17/64 (4)	17/64 (4)	17/64 (4)
N	10-32	5/16-24	5/16-24	3/8-24	3/8-24	1/2-20	1/2-20
R	5/32	5/32	5/32	5/16	5/16	21/64	21/64
S*	25/64	25/64	1/2	11/16	11/16	59/64	1 3/64
T*	3/4	49/64	57/64	1 3/64	1 1/16	1 23/64	1 1/2

* Plus Stroke


Note: To obtain a 1/8" or 3/16" stroke on 3/4" or 1 1/8" bore models, a 1/4" stroke cylinder is used and spacers are added.

Specifications	
Pressure :	0-150 PSI Air Only
Temperature :	-40°F to 250°F (to 400°F with Viton)
Lubrication :	Petroleum base oil
Filtration :	40 Micron Minimum
Seals :	Buna N

Options & Ordering Information

When ordering, specify model number, stroke length, and Viton seal option if required.

Example: SS-150 x 1/4 - FB-VI

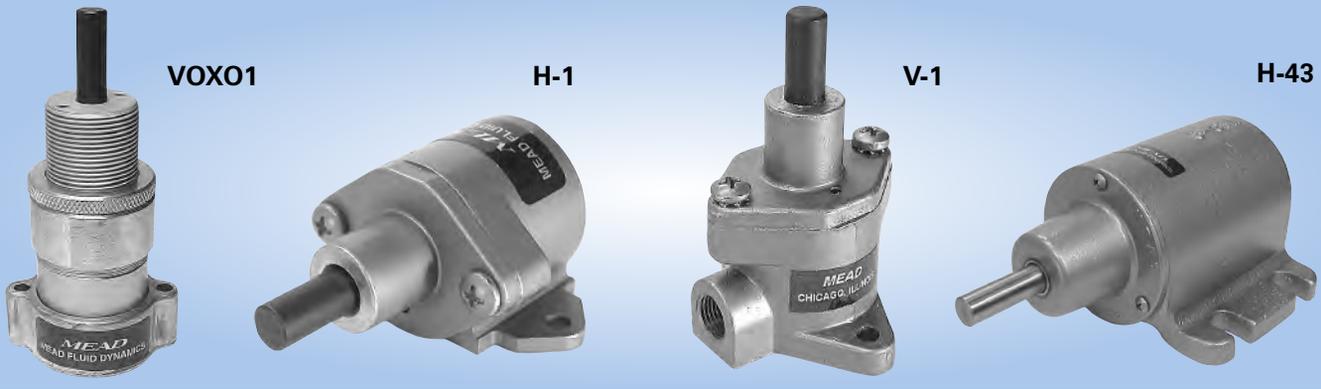

Economical single-acting air clamps provide gripping power on the out stroke and spring retraction. They are ideal for use in drill fixtures and for bending, swaging, forming, crimping, & pressing operations. Because 3-way valves may be used, hook-ups are quick and easy.

Adjustable Stroke Models

H0X01, HIX12, V0X01, and VIX12 models are supplied with an adjustable front head so that the user may adjust the length of the stroke by as much as one inch.

Specifications	
Pressure :	Air to 150 PSI
Temperature:	-40°F to +250°F
Rod Material:	Nitrotec plated steel on 1" bore models, ground and polished on all others.
Seals:	Custom molded one-piece neoprene cups
Body & Cover:	Aluminum on adjustable models, cast aluminum on all other models. Cast iron on H-12 and H-283.
Lubrication:	Petroleum base oil
Filtration:	40 Micron Minimum


Models	Return←	Bore(″)	Stroke(″)	Output*
H-1 & V-1	4	1	1 ¹¹ / ₁₆	68
HOX01 & VOX01	5	1	0 to 1	62
HIX12 & VIX12	5	1	1 to 2	61
H-41 & V-41	9	2 1/4	1	361
H-42	10	2 1/4	2	353
H-43	11	2 1/4	3	351
H-71	18	3	1	682
H-72	13	3	2	675
H-73	14	3	3	679
H-12	39	4	2	1206
H-122	27	4	2 5/8	1204
H-283	40	6	3	2763

←Maximum weight in pounds that spring will return.

*Force in pounds at 100 PSI input pressure with maximum spring resistance. Contact factory for Threaded Rods.


	H-1	HOX-01	HIX-12	H-41	H-71
A	2 25/32	4	5	4 7/8	5 5/16
B	1 11/32	Var.		2 1/4	2 3/4
C	5/8	Var.		1 1/2	1 7/16
D	5/16	5/16		1/2	3/4
G	1 1/4	1 9/16		3 1/16	3 23/32
H	-	-		-	-
J	1/8 NPTF	1/8 NPTF		1/8 NPTF	1/4 NPTF
K	3/16	.200		1/2 Slot	21/64
L	1 5/8	1 5/8		3 1/2	4 5/8
M	2	2 1/8		4 7/16	5 3/8
Q	5/8	13/16		1 9/16	1 15/16

Single Side Lug




	V-1	VOX-01	VIX-12	V-41
A	2 5/8	3 13/16	4 13/16	4 5/8
B	1 15/16	Var.		3 3/16
C	1 1/16	Var.		1 7/16
D	5/16	5/16		1/2
G	1 9/16	1 3/4		3
H	-	-		-
J	1/8 NPTF	1/8 NPTF		1/8 NPTF
K	3/16	.200		.257
L	1 11/16	1 5/8		3 3/4
M	2 1/8	2		4 1/4
Q	-	-		-

Base Mount




	H-43	H-72	H-73	H-12	H-283
A	7 1/4	6 5/16	7 5/16	7	9
B	2 3/4	2 3/16	2 3/16	2 9/16	3 1/2
C	1 7/16	1 7/16	1 7/16	1 7/16	1 7/16
D	1/2	3/4	3/4	3/4	1 1/4
G	3 1/16	3 11/16	3 11/16	5 1/16	7 1/16
H	2	2 1/16	3 1/16	2 5/16	7 1/16
J	1/8 NPTF	1/4 NPTF	1/4 NPTF	3/8 NPTF	1/2 NPTF
K	1/2 Slot	21/64	21/64	1/2 Slot	1/2-13
L	4	4 5/8	4 5/8	5 1/2	5 5/8
M	5 1/8	5 1/4	5 1/4	7	6 3/4
Q	1 9/16	1 7/8	1 7/8	2 9/16	3 9/16

Double Side Lug



	H-42	H-122
A	5 13/16	7 9/16
B	2 5/8	2 5/8
C	1 7/16	1 7/16
D	1/2	3/4
G	3 1/16	4 31/32
H	2 Holes	2 1/2
J	1/8 NPTF	3/8 NPTF
K	1/4-20	5/16-18
L	2 1/4	2 1/4
M	3	4 13/16
Q	1 9/16	2 9/16

Bottom Flush



Reference

Control Valves

Cylinders

Specialty Valves


Production Devices

Accessories

Index

Mini Cylinders Mount Anywhere!

Mead's line of miniature air cylinders offers users a wide range of low-profile linear actuators. These versatile cylinders are available in both single-acting and double-acting models. They are ideal actuators in any application where space is limited.

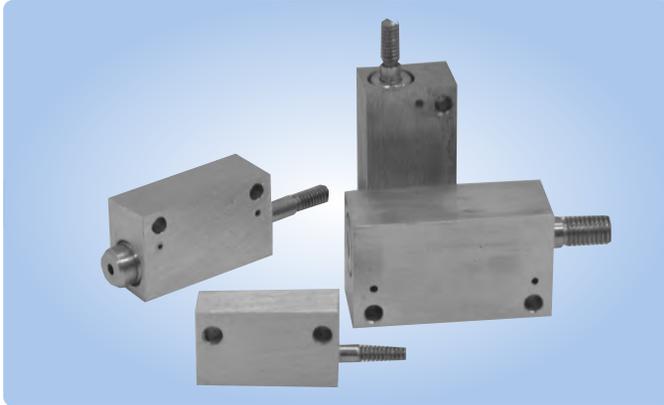

General Specifications	
Seals:	Buna N (Viton Optional)
Temperature:	Buna N seals = 0°F to 220°F
Viton seals:	0°F to 400°F
Operating Pressure:	to 125 psi
Piston Rods:	Stainless Steel
Rod Bearings:	660 Bronze
Lubrication:	Recommended - non detergent petroleum based
Filtration:	40 Micron

MF Series - Mini Flat Mount Cylinders

Mead's MF Series are miniature, rectangular flat mount cylinders. MF cylinders are available in both single and double-acting models with strokes up to 2".

All ports are tapped 10-32 except the front ports of 1/4" bore models, which have a 6-32 barb fitting. The standard location for the rear extend port is denoted by location "N" on the dimensional drawing. As an option, a rear side port can be ordered special. Contact Mead for details.

Stroke Length Availability - MF Series

This series is available in 1/4" and 1/2" standard stroke lengths.* By adding a spacer, all models are also available in fractional stroke lengths for no additional charge. (Dimensionally the cylinder will be the same as the next closest size up.) If other strokes are required, contact Mead to quote a custom stroke length.

*NOTE: The MF-250 (1/4" bore), Single Acting (SR or SE) is only available in 1/4" standard stroke length.

MF Cylinder Dimensions


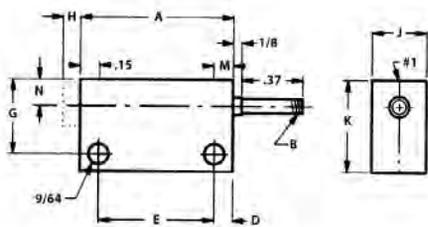


Figure 1:
For strokes up to 1/2"
1
Indicates port locations. The H dimension is for spring extend cylinders only.

When nominal forces are adequate, this table may be helpful.

Typical Spring Forces			
Spring Return		Spring Extend	
250 - 1/4" stroke	14-18 ozs.	250 - 1/4" stroke	25-29 ozs.
375 - 1/4" stroke	22-26 ozs.	375 - 1/4" stroke	30-34 ozs.
375 - 1/2" stroke	22-26 ozs.	375 - 1/2" stroke	54-58 ozs.
500 - 1/4" stroke	42-46 ozs.	500 - 1/4" stroke	62-66 ozs.
500 - 1/2" stroke	51-55 ozs.	500 - 1/2" stroke	78-80 ozs.

Bore	Stroke	A	B	D	E	G	H	I	J	K	M	N	O	Front Port	Rear Port
1/4"	1/4"	1.06	6-32	.12	0.81	7/16"	.10	.31	3/8"	5/8"	.20	.18	5/16"	6-32	10-32
	1/2"	1.31	6-32	.12	1.06	7/16"	-	.31	3/8"	5/8"	.20	.18	5/16"	Barb	Tap
3/8"	1/4"	1.25	8-32	.15	0.93	5/8"	.18	.37	1/2"	3/4"	.37	.25	7/16"	10-32	10-32
	1/2"	1.50	8-32	.15	1.18	5/8"	.18	.37	1/2"	3/4"	.37	.25	7/16"	Tap	Tap
1/2"	1/4"	1.31	1/4-28	.15	1.00	3/4"	-	.37	5/8"	7/8"	.37	.31	9/16"	10-32	10.32
	1/2"	1.56	1/4-28	.15	1.25	3/4"	-	.37	5/8"	7/8"	.37	.31	9/16"	Tap	Tap



Dimensions For Cylinders With Strokes Over 1/2"

Bore	A ₁	A ₂
1/4"	1.06	0.81 + Stroke
3/8"	1.25	1.00 + Stroke
1/2"	1.31	1.06 + Stroke

Figure 2: For Strokes Over 1/2"



MA Series - Mini Adjustable Location Cylinders





These threaded body cylinders install quickly and easily without special mounting devices. Either drill a hole, insert your cylinder, and position with the pair of jam nuts or tap a hole and lock into position with a single jam nut. The MA-Series cylinders are electroless nickel plated for excellent corrosion resistance and a gleaming appearance.

Non-rotating: This option is available on 3/8" and 1/2" bore, single-acting, spring return cylinders.

Stroke Length Availability - MA Series

The MA-250 (1/4" Bore) single acting is only available in a 1/4" stroke lengths. The MA-250 double acting is available in 1/4", 1/2" and 1" stroke lengths. The MA-375 (3/8" Bore) and MA-500 (1/2" Bore) single acting is available in 1/4" and 1/2"; the double acting version is available in 1/4", 1/2", 1", 1-1/2" and 2" stroke lengths. By adding a spacer, all models are also available in fractional stroke lengths for no additional charge. (Dimensionally the cylinder will be the same as the next closest size up.) If other strokes are required, contact Mead to quote a custom stroke length.

MA Cylinder Dimensions



Bore	A=Stroke+	B	C	D	E	F	I	J	K	M	N
1/4"	0.81	.15	.62	3/8-32	.14	6-32	.31	.06	.62	.20	.10
3/8"	1.00	.18	.75	1/2-32	.17	8-32	.31	.21	.75	.37	.18
1/2"	1.06	.18	.87	5/8-32	.25	1/4-28	.31	.21	.87	.37	-

Ordering Miniature Cylinders:

MA - 500 x 1.00 DA - RB (* * *)

Family

MA = Mini Adjustable
MF = Mini Flat

Bore

250 = 1/4" Bore
375 = 3/8" Bore
500 = 1/2" Bore

Stroke (in inches)

See "Stroke Length Availability..." for particular series.

Type

DA = Double Acting
SR = Spring Return
SE = Spring Extended

Options

V = Viton Seals
NR = Non-Rotating (Hex Rod) (MA Series Only)

Front Port

O = None (Spring Return)
S = Side Tapped (10-32)
B = 6-32 Barb (For 1/16" ID Hose)

Rear Port


O = None (Spring Extend)
R = Rear Tapped (10-32)
S = Side Tapped (10-32)*
B = 6-32 Barb (For 1/16" ID Hose)

* Special Order (Non-Stock, contact factory)

Accessories

- Fitting: 10-32 to 1/16" ID HosePMHF
- Fitting: 6-32 Barb to 1/16" ID HosePMBF
- Hex Nut for 1/4" Bore CylinderPMH-250
- Hex Nut for 3/8" Bore CylinderPMH-375
- Hex Nut for 1/2" Bore CylinderPMH-500
- 1/16" ID Tube Clear Polyurethane (50 ft.)..11NAT

Mounting Blocks




	PMB 250	PMB 375	PMB 500
Bore	1/4"	3/8"	1/2"
Width	0.503	0.626	0.75
Height	0.879	0.876	0.94
Depth	0.314	0.314	0.38
Hole (2)	0.14	0.139	0.136

Slide/Lockout Valve


Mead's Slide/Lockout Valves (SLV) are designed to comply with OSHA Standard Rule 29 CFR1910.147. SLVs exhaust downstream air to atmosphere when the valve is in the closed position. This prohibits the unexpected cycling of equipment due to stored energy in the air line. These valves can only be locked in the closed position, rendering any downstream machinery or equipment completely inoperable. The aluminum sleeve is anodized bright gold for easy identification.

Put A Lock On Plant Accidents

In the open position, air flows freely through the valve to downstream equipment or tool.



In the closed position, air from compressor side is restricted while exhaust air bleeds to atmosphere, rendering downstream equipment inoperable. Lockout is only possible in the closed position.

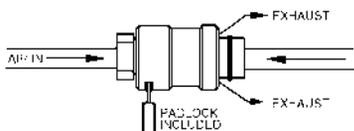

"Gang Lock" Option

SLVs may be ordered with a gang lock adapter rather than the standard Mead padlock. The adapter permits the use of one or multiple standard padlocks. To order, add a "G" to the model (i.e. SLVG-50).

OSHA Rule 29 CFR1910.147* (Effective January 1990)

To protect employees from the unexpected energization or release of stored energy during repair, maintenance and associated activities, this new standard requires potentially hazardous energy sources for certain equipment to be disabled and either be locked or labeled with a warning tag to prevent unauthorized start-up of these machines or equipment.

*Copies of the actual OSHA standard may be obtained from the U.S. Department of Labor, Occupational Safety and Health Administration, Office of Publications, Room N3101, Washington, D.C. 20210.




SLV-37

Specifications	
Temperature Range:	-50°F to 180°F
Pressure Range:	0 to 150 PSI
Construction:	
Body:	Black Anodized Aluminum
Sleeve:	Gold Anodized Aluminum
Retaining Ring:	Steel
O Rings:	Buna N
Lock:	Solid Brass (Steel Shackle)

Warning: SLV's are not to be used for lockout of hydraulic fluid.

Dimensions

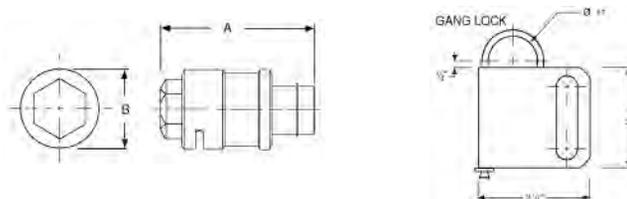

Ordering Information

Model	Model (With Gang Lock)	Port Size	Cv	A (In.)	B (In.)
SLV-25	SLVG-25	1/4" NPT	0.94	2 9/16"	1 1/4"
SLV-37	SLVG-37	3/8" NPT	2.00	2 15/16"	1 7/16"
SLV-50	SLVG-50	1/2" NPT	3.18	3 11/32"	1 5/8"

Note: Use part #LCK100 to order replacement lock and key set.
Use part #2028002 to order replacement gang lock.

Easy Glide Ball Handle Valves (MHL SERIES)



MHL-3/MHL-4

General Specifications	
Flow:	0.14 Cv
Ports:	1/8" NPT
Temperature Range:	-40°F to 250°F
Lubrication:	SAE 10
Pressure Range:	0 to 150 PSI (Air Only)
Seals:	Buna

Low Friction Motion

MHL valves provide either 3-way pilot control (MHL-3) or 4-way directional control (MHL-4). To operate MHL valves, simply move the ball handle across the slot on the valve body. The handle rotates a precision-lapped disc to control the directional flow of air. The hardcoat anodized aluminum disc allows virtually effortless handle motion. The handle will hold in any position. Air exhausts through the disc and out to atmosphere.

Easy To Mount and Repair

Base mount holes make mounting and removal quick and easy. Further, MHL valves are easy to disassemble. By simply removing the ball handle and snap ring, any part worn by use can be found and replaced.

General Purpose 2 & 3-Way Mini Solenoid Valves



MB25-3USC


Dyna-Coil valves are used when you need to convert an electrical signal into a flow of air. 2-way models allow air to flow through the valve when energized. 3-way models allow air to flow through the valve when energized and exhaust when de-energized.

Normally closed means inlet air is blocked until the valve is energized. Normally open means inlet air flows through the valve and is blocked when energized.


General Specifications	
Media:	Air / Max temperature 185° F
Pressure:	Vacuum to 120 PSI
Orifice:	0.038"
Conduit:	1/2" NPS
Response:	20-30 ms
Base:	Aluminum
Mounting Holes(2):	8-32 UNC-2B threads
Lubrication:	None Required
Filtration:	40 Micron Minimum

Basic Dimensions

1/8" and 1/4" CSC Models



1/8" and 1/4" USC Models



Model	Ports	Style	Exhaust	Voltage	Cv (In)	Cv (Exh)	A	B	C	D	E	F	G
MB12-2CSC	1/8" NPT	2-Way NC	None	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	-	2 5/16	1 3/8	1 27/32	1 3/16	1	9/32	.738
MB25-2CSC	1/4" NPT	2-Way NC	None	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	-	2 3/8	1 1/2	1 27/32	1 3/16	1 3/16	5/16	29/32
MB12-3CSC	1/8" NPT	3-Way NC	Free to Atmos.	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2 5/16	1 3/8	1 27/32	1 3/16	1	9/32	.738
MB12-3USC*	1/8" NPT	3-Way NC, NO	Piped	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2 23/32	1 3/8	1 27/32	1 3/16	1	9/32	.738
MB25-3CSC	1/4" NPT	3-Way NC	Free to Atmos.	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2 3/8	1 1/2	1 27/32	1 3/16	1 3/16	5/16	29/32
MB25-3USC*	1/4" NPT	3-Way NC, NO	Piped	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2 27/32	1 1/2	1 27/32	1 3/16	1 3/16	5/16	29/32

* Valve can be piped either normally closed (NC) or normally open (NO)

Note: All models consume 7 watts of power. Lead wires measure 16" in length




USV-100


USV-250

Binary Valves

The USV-100 provides alternating outputs from a single input port. The valve has two outputs which are selected alternately by applying a pulsing, on-off air signal to the input port. USV-100 will not function properly with a sustained signal.




USV-100 Dimensions

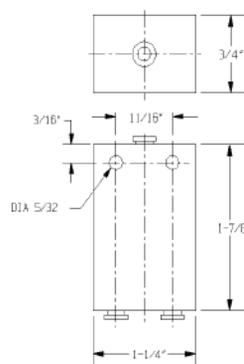

When pressure is applied to port 1, it flows through the valve to provide an output at port 2. When the pressure is released from port 1, the valve changes over so that when pressure is next applied at port 1, air flows out through port 3. Release of the pressure again changes the valve back to its original position. Therefore, each time pressure is applied and released to port 1, outputs 2 and 3 change over. **Note:** The air signal must be fully exhausted to enable the valve to change over properly.

Power models (USV-250) provide the same binary function as the 100 model but, in addition, offer full 4-way control power. They are suitable for direct connection to double-acting air cylinders. The USV-250 features a positive feed back from the outputs, eliminating incorrect sequential operation caused by poor signal performance.

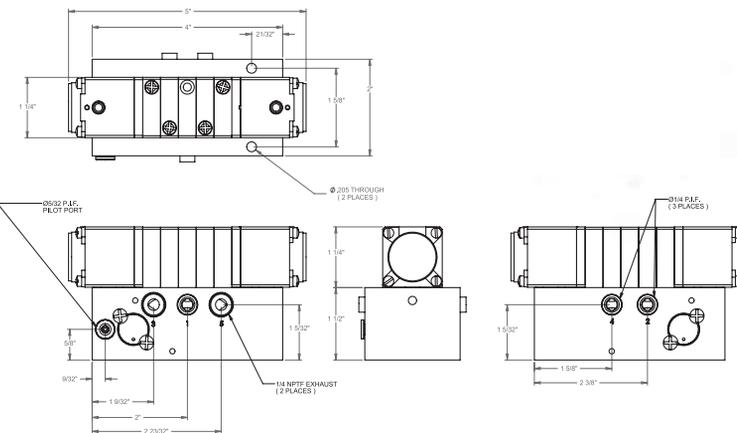

Technical Specification	100 Model	250 Model
Operating Pressure	35-100PSI	35-100PSI
Flow to atmosphere	4 SCFM @ 100 PSI	36.9 SCFM @ 100 PSI
Permissible Mediums	Air and Inert Gas	Air and Inert Gas
Ambient Temp. Range	10°F to 120°F	10°F to 120°F
Lubrication	Recommended	Not necessary
Flow		Cv = 0.75

Air Timers Delay Signal

Air timers are used to delay the air signal coming in or out of an air component. Depending on the model, the delay may be adjusted from 0.75 to 30 seconds. Input port is indicated by a yellow dot.

Timers are available in either normally closed (NC) or normally open (NO) models. Normally closed models are used to time in and normally open models are used to time out. Once set, timers are accurate for repeatability to 10% with regulated air pressure.




General Specifications

Filtration:	40 micron filtration recommended
Lubrication:	30 wt. non-detergent oil
Pressure Range:	50-150 PSI (NC); 40-150 PSI (NO)
Mounting:	(2) 11/64 clearance holes
Life Expectancy:	1,000,000 cycles
Temp Range:	50°F to 120°F
Port Sizes/Material:	1/8" / Acrylic

Model Number	Range	Ports	Length	Width	Height
NC					
KLC-105	0.75-6 sec.	1/8"	4"	1"	1 1/2"
KLC-110	1-11 sec.	1/8"	4"	1"	1 1/2"
KLC-212	15 sec.-2 min.	1/8"	4 7/8"	1 7/8"	1 1/2"
KLC-230	2-30 sec.	1/8"	4 7/8"	1 1/2"	1 7/8"
KLC-260	10-60 sec.	1/8"	4 7/8"	1 7/8"	1 1/2"
NO					
KLH-105	0.75-6 sec.	1/8"	4"	1"	1 1/2"
KLH-110	1-11 sec.	1/8"	4"	1"	1 1/2"
KLH-212	15 sec.-2 min.	1/8"	4 7/8"	1 7/8"	1 1/2"
KLH-230	2-30 sec.	1/8"	4 7/8"	1 1/2"	1 7/8"
KLH-260	10-60 sec.	1/8"	4 7/8"	1 7/8"	1 1/2"


Note: NC timers have a green spool; NO timers have a red spool. For special timers, consult factory.

Timing In (Normally Closed) Circuit

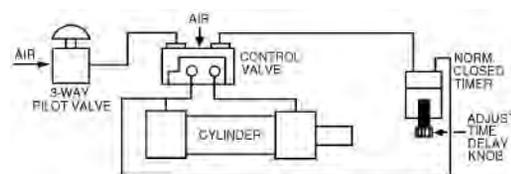

In this circuit, the 3-way valve is actuated and air is sent to the control valve. The control valve shifts, sending air through port A to the cylinder, which extends. Air also flows to the timer where it begins to time to the pre-setting. Once reached, the timer opens, allowing the air to flow through to the control valve's other pilot port, shifting the valve back. Air flows through port B, retracting the cylinder.

Timing Out (Normally Open) Circuit

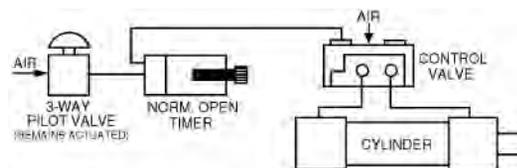

When the 3-way valve is actuated, air flows through the NO timer to the control valve. The 3-way valve remains actuated. The control valve shifts, sending air through port A to the cylinder, which extends. At the same time, the timer begins to time to the pre-setting. Once reached, the timer closes, blocking off the air flow to the control valve, which spring returns. Air flows through port B, retracting the cylinder.

414B
Pressure Type



415B
Bleed Type



Pneumatic Impulse Relay Valves

Impulse relay valves allow you to shift a double-pressure piloted or double bleed piloted valve, even though there are overlapping pilot signals. Relay valves convert a sustained air flow from a three-way pilot valve into a momentary pulse or bleed, which shifts a control valve and then closes.


General Specifications

Mounting:	Mounts directly to control valve with nipple fitting
Body Construction:	Aluminum
Pressure Range:	35 to 125 PSI
Lubrication:	10 wt. non-detergent oil

Note: Required inlet pressure must be delivered all at once.


Model Number	Ports	Type	Length	Width	Height
414B	1/8" NPTF	Pressure	1 59/64"	3/4"	1 1/4"
415B	1/8" NPTF	Bleed	1 59/64"	3/4"	3 11/16"

Sample Circuit Using 414B (Pressure Type)

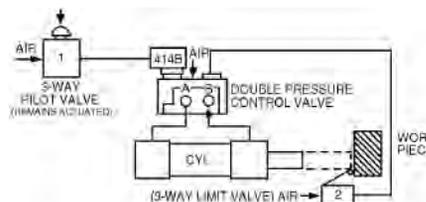

When actuated, the 3-way valve sends a signal to 414B, which emits a signal to the control valve. The 3-way valve remains actuated. The valve shifts, allowing air to flow through port A, extending the cylinder. 414B senses the back pressure caused by the shifted valve, closes, and exhausts. Since the signal from valve #1 is blocked by the closed 414B, valve #2 (when actuated) shifts the control valve back. Air flows through port B, retracting the cylinder.

Sample Circuit Using 415B (Bleed Type)

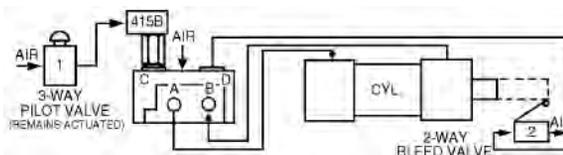


Air enters a double bleed piloted valve, flows through ports C and D, and is blocked by the 415B relay and valve #2. When actuated, the 3-way valve #1 sends an air signal to the 415B. The 3-way valve remains actuated, 415B exhausts, shifting the control valve and extending the cylinder. The 415B senses the back pressure from the shifted valve and closes, blocking off the air flow from valve #1. This allows valve #2 (when actuated) to bleed air, allowing the control valve to shift. Air flows through port B, retracting the cylinder.



Pneumatic Stroke Completion Sensors

Stroke Completion Sensors (SCS) mount directly on cylinder ports to provide an air signal when rod motion stops...even when the full stroke length is not used. Stroke completion sensors automatically adjust to variable strokes, replacing limit and reed switches in clamping, holding and sequencing tasks.

Sensors work by comparing supply pressure to exhaust pressure. Once the pressure drops on the exhaust side of the cylinder, the sensor will emit an air signal. Stroke completion sensors are not recommended for cylinder "inching" operations with pressure held valves.

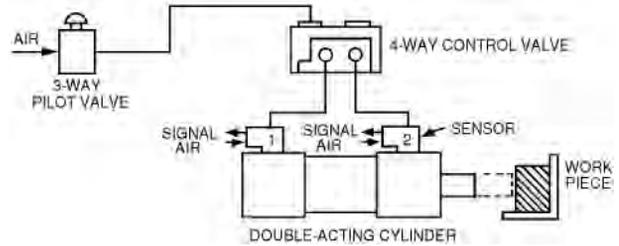

In this sample circuit, sensor #1 provides an air signal when the cylinder rod is retracted. When the four-way control valve shifts, air flows to the cylinder, which extends. This causes sensor #1 to shut off. The cylinder rod stops when it reaches the work piece or end of stroke, causing sensor #2 to emit an air signal. This air signal may be used to actuate another valve or for sequencing operations.


When using a flow control valve in conjunction with a stroke completion sensor, place the flow control valve between the control valve and the sensor.

Specifications & Dimensions


Model Number	Mtg. Thread	Pilot Tubing	Pressure Range	Length	Width	Height
SCS-112	1/8" NPT	5/32" OD	60 to 120 PSI	2 3/16"	29/32"	1"
SCS-250	1/4" NPT	5/32" OD	60 to 120 PSI	2 3/16"	29/32"	1"
SCS-375	3/8" NPT	5/32" OD	60 to 120 PSI	2 3/4"	1 17/64"	1 1/16"
SCS-500	1/2" NPT	5/32" OD	60 to 120 PSI	2 3/4"	1 17/64"	1 1/16"

Temperature Range 5° to 140° F


Dimensions

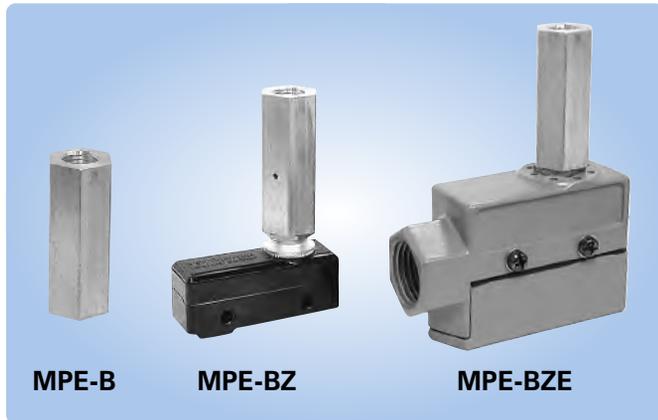


MPE-B (Actuator Head)



MPE-BZ



MPE-BZE



Air to Electric Switches

Air to electric switches convert air signals into electrical signals...ideal for actuating solenoid power valves or other electric components. Switches may be wired normally closed or normally open.

Actuator head model MPE-B may be easily mounted on any plunger-type switch; operating range is 8 PSI (minimum) to 100 PSI (maximum) and is not adjustable to a specific pressure.

Switch models MPE-BZ and MPE-BZE are single pole double throw (SPDT), have a 15 amp capacity for normal, low resistance electrical circuits and are UL and CSA listed. Solder terminals accept up to #14 wire.

Specifications

Model Number	Description
MPE-B	Actuator Head Only
MPE-BZ	Actuator Head and Switch, 15 Amp
MPE-BZE	Actuator Head, Switch and Enclosure, 15 Amp



Ideal For Mobile Equipment Applications

2-position ACV valves can be used for four-way directional control or as a three-way pilot valve. Its function indicator has been designed directly into the control knob and is visible only when the valve is in the energized or open position. In the unoperated (closed) position the indicator ring is concealed within the knob assembly.

ACV features an optional interlock reset port which can be used to automatically return the valve to the closed position. Designed for mobile equipment operations to avoid stall conditions, the interlock feature is used to ensure that the PTO cannot be operated while the vehicle is in motion.

Air Or Electric Reset

The reset port can be connected to the handbrake line to force valve "shut-off" whenever the handbrake is released. This would prevent the simultaneous consumption of energy from auxiliary equipment and the moving vehicle, a situation likely to result in a stall condition or equipment damage. On electrical interlock models, removing the electrical supply will force shutoff.

ACVs are rear ported to simplify dashboard or panel mounting. All mountings are supplied with integral push-in fittings (for 5/32" or 1/4" tube). Simply push the tube directly into the valve.

How To Order

ACV - R25 - AR - B

Family Category
ACV = Air Control Valve


Knob Color
R = Red
B = Black
G = Green

Port Size
25 = 1/4"
6M = 6 mm


Solenoid
A = 12VDC
B = 24VDC

Feature
AR = Air Released
AP = Air Applied
SR = Solenoid with Air Released

Sample Hook-Up To Mobile PTO System

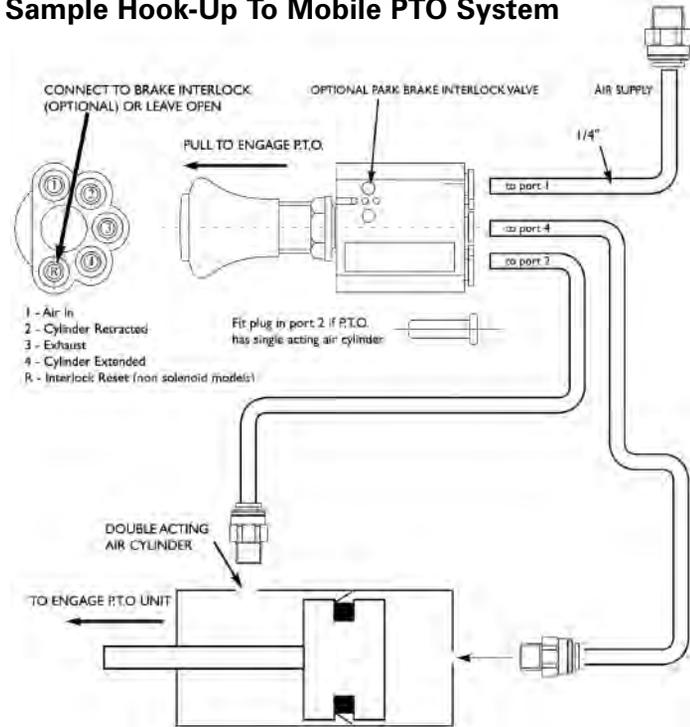

Dimensions 1/4" Models

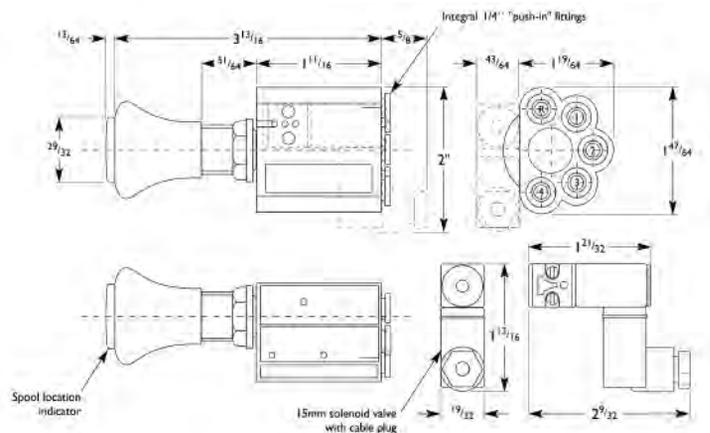


General Specifications	
Media:	Air to 145 PSI (10 Bar)
Min. Pressure to Reset Port :	35 PSI
Flow (5/32" models):	0.053 C _v
Flow (1/4" models):	0.12 C _v
Neck Diameter For Panel Mounting :	1 1/16"
Body:	Plastic
Spool:	Brass
Fittings:	Brass and Plastic
Seals:	PTFE filled Nitrile
Temperature:	-4° to 122°F
Cycle Life:	>15 Million



Smooth Laminar Flow

The unique construction of Dyla-Trol® assures a perfectly tapering flow. This unprecedented smoothness is made possible by the "iris" type orifice mechanism. Where needle-type flow controls generate turbulence as they close, Dyla-Trol® maintains an even 360° laminar flow regardless of the setting.

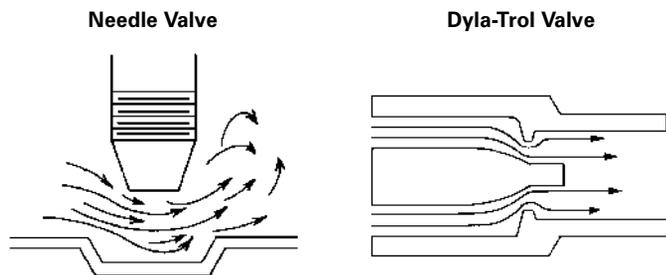

High Repeatability

The fast-acting check mechanism in each free flow model responds to very slight changes in pressure. This guarantees fast resetting and dependable repeatability with each cycle.

Models and Specifications

Flow Direction	MF1-02	MF1-04	MF1-06	MF1-08	MF1-12	MF1-25	MF1-37	MF1-50
Max. Pressure in PSI	250 Air 250 Oil	250 Air 250 Oil	250 Air 250 Oil	250 Air 250 Oil	250 Air 1000 Oil	250 Air 1000 Oil	250 Air 1000 Oil	250 Air 1000 Oil
Max. Flow @ 100 PSI	8 CFM $C_v = 0.1$	7 CFM $C_v = 0.1$	7 CFM $C_v = 0.1$	7 CFM $C_v = 0.1$	47 CFM $C_v = 0.8$	66 CFM $C_v = 1.2$	149 CFM $C_v = 2.6$	173 CFM $C_v = 3.1$
Body	Brass	Brass	Brass	Brass	Aluminum	Aluminum	Aluminum	Aluminum
Length	1 1/4"	2 1/2"	2 7/16"	2 1/2"	2"	2 1/2"	2 7/8"	3 1/4"


Precise-Metering Flow Control

Fine tune the speed of your cylinders with precise-metering Dyla-Trol® valves. No other flow control provides such accurate control of cylinder motion.

For best results locate flow control valves right on the cylinder ports with the "free flow" direction pointing toward the cylinder. Air exhausting from the cylinder will then be metered. Controlling air entering the cylinder produces a less smooth motion.

Note: While Dyla-Trol® are most often used to adjust cylinder speed, they are ideal for use wherever air or oil flow is to be controlled.

TYPICAL CYLINDER HOOK-UP

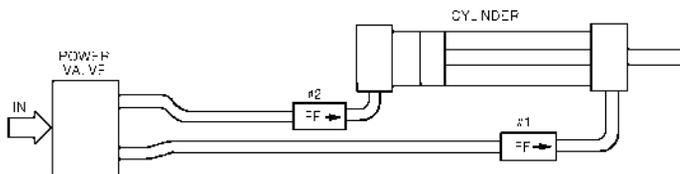

In this circuit, flow control #1 controls the outward movement of the cylinder rod and flow control #2 controls the return speed.

Compact Inline Design

The convenient inline design makes flow setting and plumbing easy. The hexagonal adjusting sleeve, which may be turned by hand, is only slightly greater in diameter than the tubing and has no protrusions to impair hook-up.

Each Valve Factory "Tuned" for Accuracy

To accomplish the perfect orifice concentricity that is necessary to produce the high performance of Dyla-Trols, each sleeve and body set is permanently mated during production.

Temperature Range


-40°F to +250°F

Control

Models MF1-12, MF1-25, MF1-37 and MF1-50 are controlled flow in one direction, free flow in the other.

MF2-12, MF2-25, MF2-37 or MF2-50 are controlled flow in both directions.

Symbols



MF1 Style



MF2 Style



CSV-101LS



CSV-102



CSV-102W



CSV-107


Function of CSV's

Concurrent actuation of the recessed buttons generates a signal. Releasing one or both buttons immediately stops the signal which cannot be re-instituted until both buttons are again actuated concurrently.

Low Stress (LS) models are for high production applications where operator fatigue is a concern. Needing only 6 ounces of force to actuate, LS units ease the stress on worker's hands and wrists and greatly reduce the risk of repetitive motion disorders. Standard models require 18 ounces of force to actuate.


Consult Website for Dimensional Drawings.

CSV-101 & CSV-101LS & CSV-101W

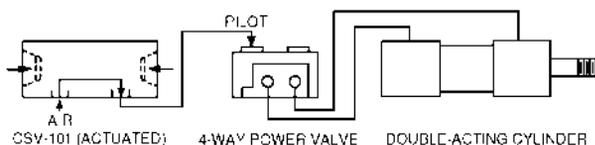


Will actuate any 3 or 4-way air piloted, spring return power valve or small single-acting cylinders. ($C_v = 0.11$)

CSV-102 & CSV-102LS & CSV-102W

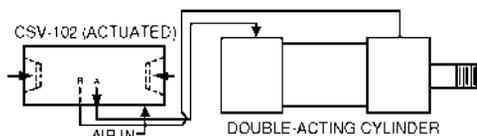

Complete power package containing a 4-way power valve ($C_v=1.00$) for direct actuation of single-acting or double acting air cylinders. Actuation sends a sustained air flow to one cylinder port. Releasing one or both buttons shifts the flow to the other cylinder port. Built-in mufflers reduce sound levels.

CSV-103

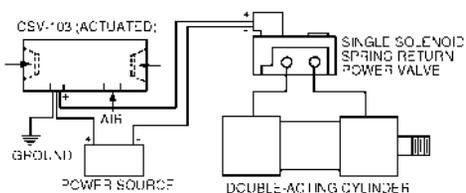

Converts an air signal into an electrical signal for actuating solenoid valves or other electrical devices. Concurrent actuation of the recessed buttons produces an electrical output. Releasing one or both buttons stops the output. The CSV-103 will not recycle until both triggers are released and again actuated concurrently. Internal switch rated at 15 amps, 480 VAC. Includes lead wire and receptacle.

For Safer Operation of Your Machinery


CSVs are two-hand anti-tiedown controls. When used, they provide safer operation of air presses, drill fixtures, clamping fixtures, cylinders, valves, or light assembly equipment. Models 101, 101LS, 102, 102LS and 103 have compact and completely self-contained controls, recessed actuation buttons built in the ends and a universal mount for convenient positioning. For remote two-hand, anti-tiedown operations, see model CSV-107.

CSV-101W & CSV-102W

CSVs are designed for use in a wash-down environment. The units provide the same pilot and power functionality of the CSV-101 and CSV-102, respectively. The logic circuitry is housed in a fiberglass industrial control panel enclosure, providing excellent chemical and corrosion resistance.

CSV-107 Logic Unit Responds To Remote Signals

CSV-107 is designed to actuate 3 or 4-way air piloted, spring return - power valves or directly power smaller single-acting cylinders. A signal can only be initiated by concurrent actuation from two remote inputs. Releasing one or both buttons immediately stops the signal and the unit cannot recycle until both signals are again simultaneously actuated. ($C_v = 0.11$)

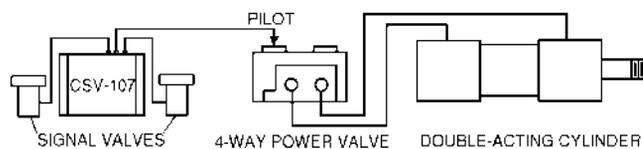

The CSV-107 may be purchased alone or with low stress signal valves (LS1, LS2). For information on Mead Low Stress Valves, which are offered with CSV Low Stress (LS) units, please refer to page 25. Push-to-connect fittings included on all pneumatic models.

Specifications

Model No.	Function	Ports (NPTF)
CSV-101	Actuation of Power Valve	(2) 1/8"
CSV-101 W	Actuation of Power Valve	(3) 1/8"
CSV-101 LS	CSV-101, With Low Stress Actuation	(2) 1/8"
CSV-102	Direct Actuation of Air Cylinder or Air Press	(3) 1/4" Fittings
CSV-102 W	Direct Actuation of Air Cylinder or Air Press	(6) 1/4" Fittings
CSV-102 LS	CSV-102, With Low Stress Actuation	(3) 1/4" Fittings
CSV-103	Electrical Actuation of Solenoid Valve	(1) 1/8"
CSV-107	Remote Logic Unit Only	(3) Fittings
CSV-107 LS1	Logic Unit, (2) LTV-PBG Low Stress Valves	Included for 5/32" OD Tube
CSV-107 LS2	Logic Unit, (2) LTV-PBGF Low Stress Valves	

Note: Operating pressure range is 70 - 100 PSI.

Warning: CSV's are intended to operate pneumatic valves and cylinders. They are not meant to be used on full or partial revolution fly wheel presses, power brakes or other similar devices.

Warning: Actuators for CSV-107 must be positioned so that they may not be accidentally tripped or operated in an unsafe manner. Do not actuate CSV-107 with foot operated valves.

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index



AP-42P

1/4 Ton Arbor Press
Versatile, light-duty press.
Single-acting, spring return.



CP-400P

3/4 Ton Column Press
Column provides infinitely variable daylight settings and permits radial swing.



AP-400P

3/4 Ton Arbor Press
Heavy-duty cast iron frame is extremely rigid.



AP-600P

1 3/4 Ton Arbor Press
Welded steel plate frame. Cylinder mount and table are milled to provide precise rod alignment.

Air Presses Automate Tasks


Economical air powered presses reduce production costs by automating crimping, heat sealing, bending, forming, pressing, swaging, riveting and burnishing operations. Easy hook-up. Just attach to your shop air supply. No wiring, pumps, or motors needed.

Single-Acting Air Presses

Besides the AP-42P shown on this page, Mead offers two other single-acting alternatives. AP-122 combines a 4" bore single-acting cylinder (H-122) with the AP-400M press stand. AP-283 combines a 6" bore cylinder (#6030403) with the AP-600M press stand. A PL-600 cylinder-to-stand adapter plate is required for mounting this cylinder on the stand. Full dimensional drawings are given on the following page.


Press Options

Rod Speed Reduction



To control the downward speed of double-acting presses, place a Mead Dyla-Trol valve (see page 62) in the bottom cylinder port so that incoming air flows freely and exhausting air is metered. Model MF1-25 is suitable for the control of all presses under most conditions.

Two Hand Control Unit



Models with a "C" suffix are supplied with a two hand anti-tiedown unit. Recessed trigger buttons, located in each end of the compact unit, require the press operator to use both hands concurrently to operate the press. Models CP-400C and AP-400C include the CSV-102, which has a built-in power valve. Model AP-600C includes the CSV-101 and a 1/2" power valve (C5-3). All air logic. No electrical wiring. See page 63 for the two hand controls. See pages (22-23) for the power valve.

	1/4 Ton Arbor Press	3/4 Ton Column Press	3/4 Ton Arbor Press	1 3/4 Ton Arbor Press
Press Stand Only	AP-42M	CP-400M	AP-400M	AP-600M
Cylinder Mounted On Stand**	AP-42P	CP-400P	AP-400P	AP-600P
Complete Press with Two Hand Controls (Not Piped)	-	CP-400C	AP-400C	AP-600C
Double Rod Option (DR)	NA	●	●	●
Non-Rotating Option (NR)	NA	●	●	●
Specifications				
Cylinder Bore (In.)	2 1/4	4	4	6
Thrust at 100 PSI (lbs.)	477	1508	1508	3393
Standard Stroke Length (In.)	2 (Spr. Ret)	4*	2 1/2*	4*
Table Width and Depth (In.)	3 x 3	6 7/8 x 8 3/4	5 x 5	8 x 8

Note: Standard column for Column Press is 14" long. Longer column (18" max.) is available on request.

* Additional stroke available to 4" on AP-400 and to 6" on AP-600. Consult factory.


** Consult website for press hookups.

Double Rod Option (DR)




Double-acting press cylinders may be ordered with the piston rod extending from both ends. This minimizes rod deflection and make it possible to adjust stroke length. When a CP-400 is ordered with double rod, spacers are supplied to facilitate adjustment.

Press Speed Boost



Quick exhaust valves increase rod speed by allowing exhaust air to be dumped right at the cylinder instead of passing back through the directional valve. If speed is to be increased in both directions on double-acting presses, use one QEV in each port. Use model QEV-3 with 1/4 ton presses and model QEV-2B on 3/4 and 1 3/4 ton models. See page 69 for more information regarding QEVs.

HP-600P

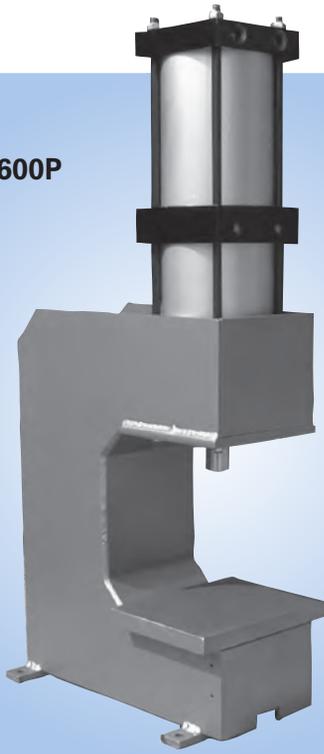

Mead's latest press utilizes multiple stages to achieve a dramatically increased output force. A standard shop air input (110 PSI) can achieve a push output force of up to 6057 lbs. The standard model has two stages, but upon request Mead can provide more stages which means higher output force at an even lower input force.

Economical air powered presses reduce production costs by automating crimping, heat sealing, bending, forming, pressing, swaging, riveting and burnishing operations. Easy hook-up. Just attach to your shop air supply. No wiring, pumps, or motors needed.

Operating Specifications

Temperature Range: -40°F to +250°F (to +400°F on request)

Lubrication: For maximum cylinder life, non-detergent petroleum based oil is recommended. Non-lube seals available.

Filtration: Standard 40 micron filter for maximum life.

Maximum Pressure: 110psi

Maximum Output Force: 6057lbs

Thrust Multiplier: 55*

*To determine thrust at other inlet pressure, multiply factor by desired pressure

Ordering Information

Model #	Description
HP-600M	Press stand only.
HP-600P	Cylinder mounted on stand
HP-600C	Complete press with 2 hand controls (not piped).

Specify:

Throat dimension "T" Min=1/2" Max=9"

Stroke dimension "S" Min=1/4" Max=9"

Sample Part

HP-600P G2 - T8.00 - S4.00

Model

Stages

Stroke

Throat

Contact Mead to consult for more than the standard two stages.

NOTE: Stroke cannot exceed throat.

Available Cylinder Options:

- CR = Cushion Rear
- IPR = Inter-Pilot Rear
- MP = Magnetic Piston

Consult Factory for Other Options
Consult Website for Press Hook-ups

Materials

Rod Bearing: Teflon-impregnated, hardcoated aluminum

Heads: Machined from solid aluminum bar; black anodized

Tubes: Aluminum hard anodized to 60 Rc

Piston: Solid high alloy aluminum

Piston Rod: High tensile ground and polished hard chrome plated steel

Piston and Rod Seals: Wear compensating Buna N vee rings. Self-lubricating seals also available (see Option NL).

Tube Seals: Buna N O-rings


Rod Wiper: Dupont Teflon®

Tie Rods: High tensile steel torqued to allow for flexure.

Stand: Welded steel frame.

Weight: 250 lbs.


Dimensions

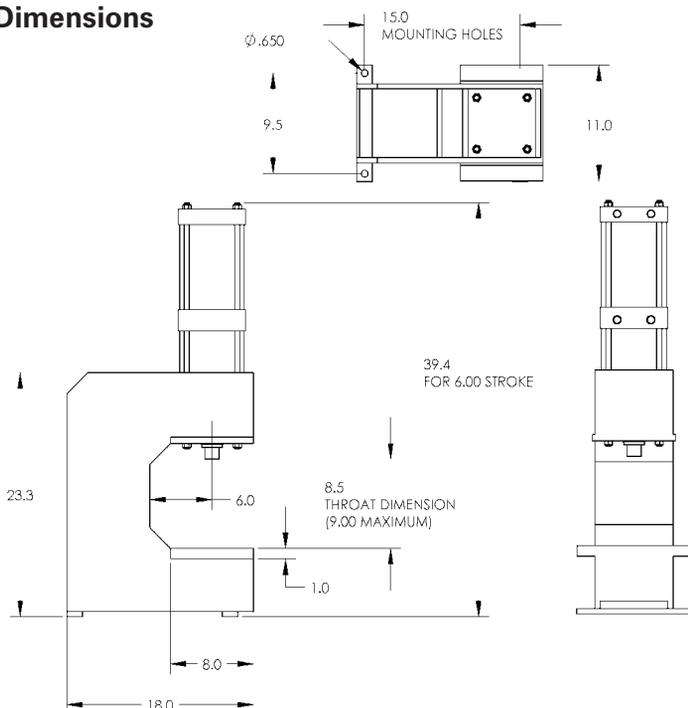

Note: For each inch of stroke overall height increases by 2"

AP-42


Shipping Weight: Stand Only = 9 lbs.
Stand/Cyl. = 10 lbs.

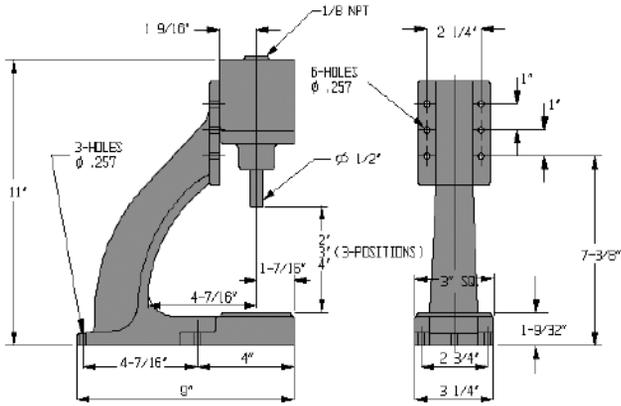

This press combines the AP-42M press stand with a Mead H-42 single-acting cylinder (2 1/4" bore, 2" stroke). Cylinder details are on page 54.

AP-122


Shipping Weight: Stand Only = 45 lbs.
Stand/Cyl. = 52 lbs.

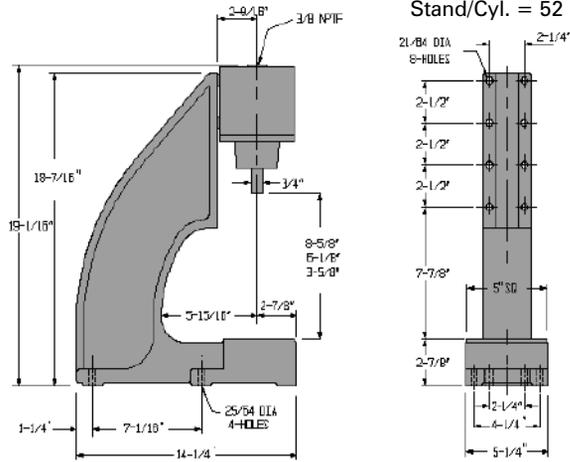

This press combines the AP-400M press stand with a Mead H-122 single-acting cylinder (4" bore, 2 5/8" stroke). Cylinder details are on page 54.

AP-400


Shipping Weight: Stand Only = 45 lbs.
Stand/Cyl. = 52 lbs.

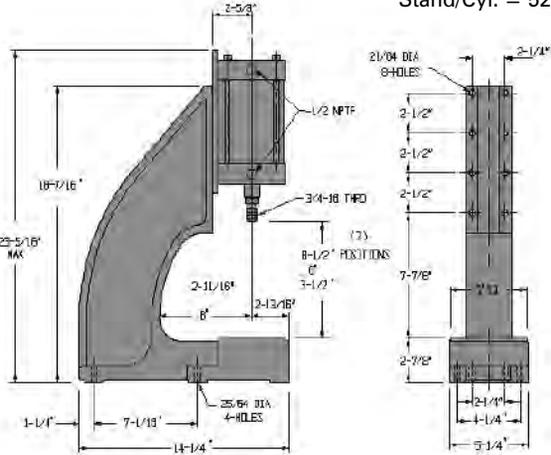

For non-standard double-acting service with strokes up to 4", use pages 36-37 to create a 4" bore cylinder for use with this stand. The PL-400 cylinder-to-stand adapter plate will be required.

CP-400


Shipping Weight: Stand Only = 90 lbs.
Stand/Cyl. = 105 lbs.

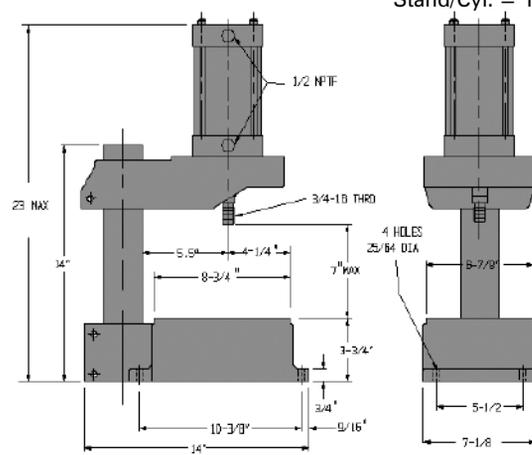

For other stroke lengths, heavy-duty or other options, use pgs. 36-37 to create any 4" bore cylinder for use with this press stand.

AP-283


Shipping Weight: Stand Only = 85 lbs.
Stand/Cyl. = 125 lbs.

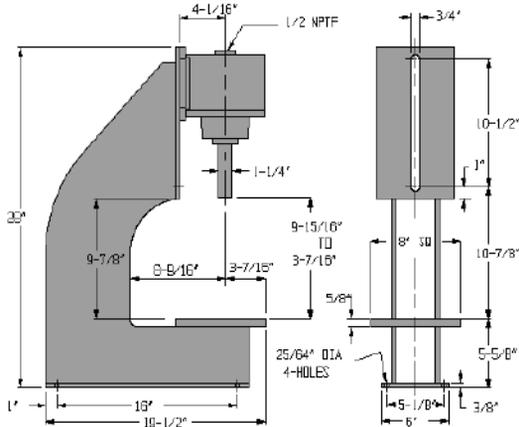

This press combines the AP-600M stand with Mead's #6040303 (H-283 with 3" longer ram, p. 54) single-acting cylinder (6" bore, 3" stroke). A PL-600 cylinder-to-stand adapter plate is required to mount this cylinder.

AP-600

Shipping Weight: Stand Only = 85 lbs.
Stand/Cyl. = 120 lbs.

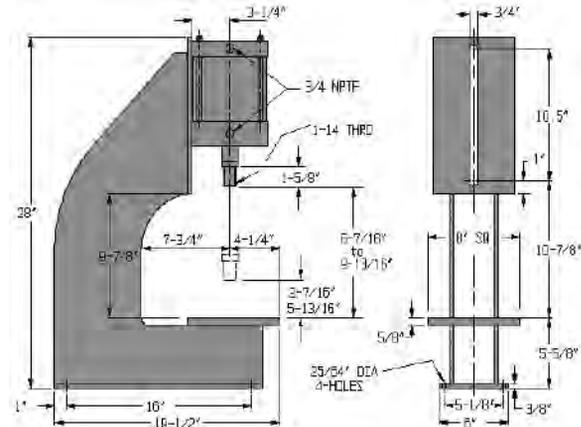

For non-standard double-acting service with strokes up to 6", use pages 36-37 to design a 6" bore cylinder for use with this stand.

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices


Accessories

Index

Air Impact Hammer




AH-65 delivers a consistent, uniform blow. It is designed to accelerate, then strike a tool which may be guided by the supplied tool arm. A spring returns the hammer to the start position after the work is completed. The head must be free with no fixturing or tooling attached directly to it.



The air hammer's impact force may be adjusted from a few ounces to 4,500 lbs. by raising or lowering the air hammer, adjusting the air trip needle valve, or adjusting the air pressure. The air trip mechanism releases the hammer head when the air in the chamber reaches a pre-set level. The hammer head accelerates to the end of its stroke, with a longer stroke (6" maximum) creating greater velocity and greater impact.


All Controls Included

AH-65 is supplied with a CSV-102 two-hand control unit. The CSV-102 requires the operator to use two hands concurrently and also provides the power valve to run the hammer. See pg. 63.

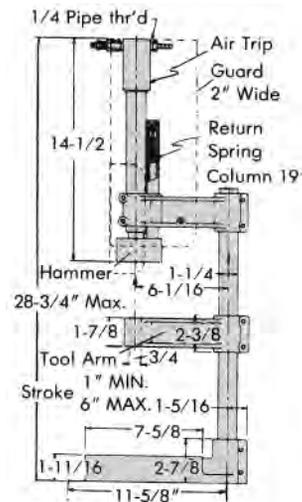

Note: Width is 4 11/16"
Pressure Range: 25-175 PSI

Collet Fixtures

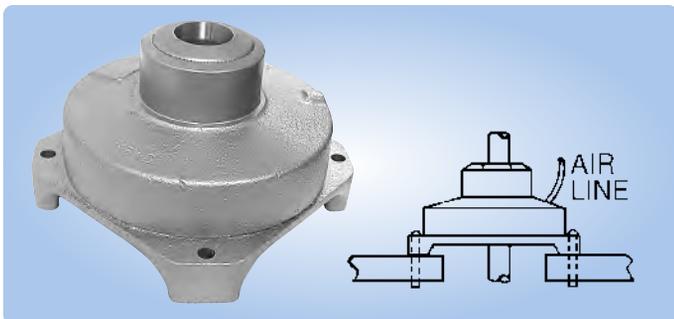


Use collet fixtures to evenly and firmly grip round bars during drilling, machining, positioning, or assembling tasks...without marring the surface of the bars.

Workpieces may pass through the fixture. Model PCF accepts standard 3C collets. Model LS-1 accepts standard 5C collets. A collet wrench is supplied to simplify collet installation and removal. Mead does not offer collets.

Double-acting collet fixtures must be actuated by a four-way valve. Model PCF will prevent a round, smooth bar from turning at up to 10 ft. lbs. of applied torque; model LS-1 at up to 40 ft. lbs. at 100 PSI.

Dimensions & Specifications



Model No.	Applied Holding Pressure @ 100 PSI; Max. 120 PSI	Collet Type	Round Stock Capacity	A (Sq.)	B (Sq.)	C	D (4)
PCF	3,400 lbs.	3C	1/2"	4 7/8"	4"	3 7/16"	.257"
LS-1	7,100 lbs.	5C	1"	7"	5 7/16"	4 9/16"	.390"

Right Angle Flow Controls (RAF and RAFK)

Mead's right-angle flow control valves provide fast, accurate control in a convenient, compact package. Designed specifically for controlling flow to pneumatic actuators, they come standard with push-in fittings, pre-applied Teflon based thread sealant, an adjustment depending on the type and convenient swivel feature for ease of tubing alignment. Both the RAF and RAF-K mount directly to your cylinder's ports. The RAF adjustment is a recessed screw driver slot. The RAF-K has a knob adjustment that can be tightened once set. For precision in-line flow controls, see Mead's Dyla-Trol® flow controls on page 62.


Specifications - RAF

Materials : Black Anodized Aluminum Body
Zinc Plated Brass Fittings
Stainless Steel Needle
Buna N Seals.

Pressure: 15-145 PSI

Temperature: -14°F to 160°F

Cracking Pressure: 5 PSI

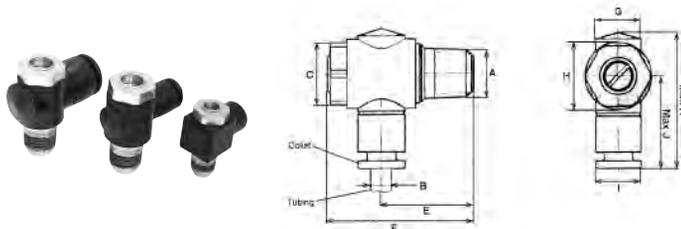


Specifications - RAFK

Materials: Brass-Nickel Plated Body
NBR 70 Seals
C72 Dacromet Shaft Clip

Pressure: 15-145 PSI

Temperature: 0°F to 160°F

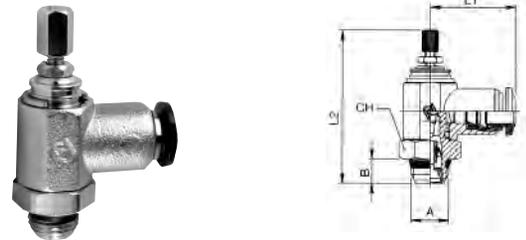

Ordering and Specification:

Model Number	A	B	C	E	F	G	H	I	J	K
RAF-5/32x2	1/8" NPFT	5/32"	.511	.780	1.26	.433	.591	.433	.843	1.24
RAF-4x2	1/8" NPFT	1/4"	.511	.780	1.26	.512	.591	.512	.944	1.33
RAF-4x4	1/4" NPFT	1/4"	.669	1.02	1.61	.512	.748	.512	1.06	1.50
RAF-6x4	1/4" NPFT	3/8"	.669	1.02	1.61	.709	.748	.709	1.06	1.57
RAF-8x8	1/2" NPFT	1/2"	.866	1.14	1.85	.709	.939	.709	1.14	1.73

Part. No.	Tube		B	L1	L2	L2	CH
	O.D.	P ₁ P ₂					
RAFK-2x2	1/8"	1/8"	.217	.827	1.614	1.830	.551
RAFK-5/32x2	5/32"	1/8"	.217	.827	1.614	1.830	.551
RAFK-4x2	1/4"	1/8"	.217	.866	1.614	1.830	.551
RAFK-4x4	1/4"	1/4"	.276	.984	1.850	2.086	.669

Female DIN Solenoid Connectors

Mead's 12mm Industrial B-type DIN solenoids feature a totally encapsulated coil with 3 male prongs, allowing fast and easy connections. A female DIN connector (ordered separately) quickly attaches to the solenoid's prongs and is secured by a single screw.

Mead offers 3 types of DIN connectors to facilitate connections to the solenoid. Model PVD1 is a connector with a 1/2" conduit entry and no lead wires. Model PVD2 also has a 1/2" conduit entry but includes 20" of cabled lead wire. Model PVD3 is a strain relief connector that includes 72" of cabled lead wire.




Model PVD1

Model PVD2

Model PVD3

DIN Connector Hook-Up Diagram (Not Polarity Sensitive)

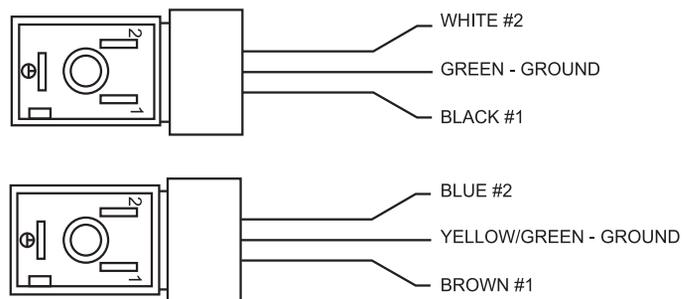

Manifold

Use the #20 die cast aluminum manifold to simplify piping and cut down on plumbing time. A 3/8" NPTF inlet port provides a common air source for up to eight 1/8" NPTF outlets.



Dimensions

Model No.	Length	Height	Width
#20	4"	1"	1 1/2"




Quick Exhaust Valves


Quick exhaust valves (QEV) increase cylinder rod speed by dumping exhaust air directly at the cylinder instead of back through the control valve. Use one QEV in each cylinder port to increase rod speed in both directions.

Using a quick exhaust valve to increase cycling speed allows a smaller, less expensive control valve to be used.

Circuit with Quick Exhaust Valves



Flow Patterns

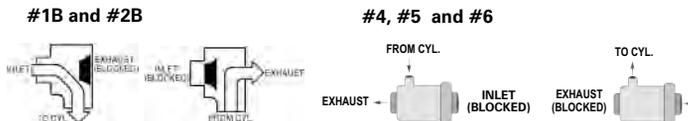

Specifications and Dimensions

Model No.	Port	Cv	Length	Width	Height
#3 QEV	1/8"	.10*	.13‡	1/2"	1 13/16"
#1B QEV	1/4"	2.71*	2.83‡	1 3/4"	2 17/32"
#2B QEV	3/8"	3.13*	3.43‡	1 3/4"	2 17/32"
#4 QEV	1/2"	3.25*	3.52‡	2.89"	1.02"
#5 QEV	3/4"	3.78*	4.08‡	3.43"	1.26"
#6 QEV	1"	4.12*	4.40‡	4.26"	3.15"

* Inlet port through cylinder port ‡ Cylinder port through exhaust port


Pressure: 30 - 125 PSI #3 QEV, #1B QEV and #2B QEV
15 - 150 PSI #4 QEV, #5 QEV and #6 QEV



Shuttle Valves

Use shuttle valves to actuate a cylinder or valve from either of two air sources. Available for 1/8" and 1/4" tubing.

Flow Patterns

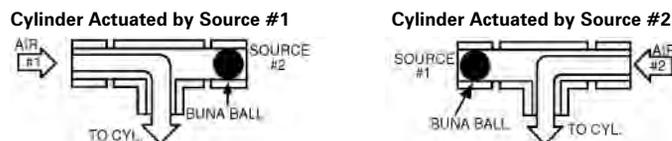

Specifications & Dimensions

Model No.	Port	Cv	Tubing	Body	Length	Width	Height
SV-2	1/8-27*	.04	1/8" O.D.	Brass	2"	7/16" Hex	15/16"
SV-1	1/8"	.32	1/4" O.D.	Alum.	2 3/4"	1"	1"

* 1/8-27 NPT male


Check Valve

Mead check valves are designed to allow full flow in one direction, and check or stop flow in the other direction.

Specifications	
Materials:	Nickel Plated Brass Body and Piston NBR 70 Seals Steel Spring
Pressure:	30-120 PSI
Temperature:	0°F to 160°F
Cracking Pressure:	3 PSI


Check Valve Dimensions

Part. No.	A	L	Es
CV-2	1/8"	1.437	.512
CV-4	1/4"	1.850	.669



Air Silencers & Breathers

MM, MMS, and MML air silencers reduce exhaust noise by approximately 20%. MMB breather vents prevent contaminants from entering the air component. All models are constructed of sintered bronze (MML are also housed in plastic). MML is designed to have 15% less pressure drop than MM or MMS models. MMP air silencers feature a unique stem for quick connections to tube collets.



MMS Silencers not only serve as sound reducers, but are also low cost speed controls. An adjustable needle valve in the top of each MMS allows for the setting of exhaust rates.

Specifications and Dimensions

Model No.	Pipe Size	Length	Width	Height	Per Box
MM-019	#10-32*	45/64"	5/16" Hex	45/64"	20
MMB-125	1/8" NPT	7/16"	7/16" Hex	7/16"	20
MM-125	1/8" NPT	1 1/8"	7/16" Hex	7/16"	20
MMS-125	1/8" NPT	29/32"	1/2" Hex	1/2"	20
MML-125	1/8" NPT	2 1/8"	13/16"	13/16"	20
MMB-250	1/4" NPT	5/8"	9/16" Hex	9/16"	10
MM-250	1/4" NPT	13/8"	9/16" Hex	9/16"	10
MMS-250	1/4" NPT	1 11/64"	9/16" Hex	9/16"	10
MML-250	1/4" NPT	2 1/4"	13/16"	13/16"	5
MMP-250	1/4" O.D. Stem	2 47/64"	13/16"	13/16"	1
MMP-006	6mm O.D. Stem	2 47/64"	23/32"	23/32"	1
MMB-375	3/8" NPT	3/4"	11/16" Hex	11/16"	5
MM-375	3/8" NPT	1 1/2"	11/16" Hex	11/16"	5
MMS-375	3/8" NPT	1 17/64"	11/16" Hex	11/16"	5
MML-375	3/8" NPT	3 7/16"	1 1/4"	1 1/4"	5
MMP-375	3/8" O.D. Stem	3 7/64"	23/32"	23/32"	1
MMP-010	10 mm O.D. Stem	3 7/64"	23/32"	23/32"	1
MMB-500	1/2" NPT	7/8"	7/8" Hex	7/8"	5
MM-500	1/2" NPT	1 7/8"	7/8" Hex	7/8"	5
MMS-500	1/2" NPT	1 17/64"	7/8" Hex	7/8"	5
MML-500	1/2" NPT	3 9/16"	1 1/4"	1 1/4"	5

* Furnished with gasket

Reference
Control Valves
Cylinders
Specialty Valves
Production Devices
Accessories
Index


Special Applications

When you have a difficult or special application, Mead welcomes the opportunity to design the right product for your application. The following are some of the applications where we have designed a product to solve a problem.

Reference




CAR WASH EQUIPMENT



FUEL TREATMENT EQUIPMENT

Control Valves




HOSPITAL EQUIPMENT




DENTAL EQUIPMENT

Cylinders



PRINTING PRESSES



AUTO ASSEMBLY

Specialty Valves



LIQUID DISPENSING APPLICATIONS




NUCLEAR FUEL REFINING

Production Devices



SEWING MACHINES



ROBOTIC APPLICATIONS


Accessories




SHOE ASSEMBLY EQUIPMENT



SAFETY EQUIPMENT



FOOD PROCESS EQUIPMENT



AGRICULTURAL EQUIPMENT

Contact Mead today for help solving your special application needs.



Index

A

- Adjustable Lever Valve 26
- Adjustable Stroke Cylinder . . 54
- Air Clamps 54
- Air Collet Fixtures 67
- Air Cylinders (see Cylinders)
- Air Exhaust Silencers 69
- Air Hammer 67
- Air Piloted Valves 16-19
- Air Presses (See Presses)
- Air Timer 59
- Air to Electric Converter . . . 60
- Air Valves (See Valves)
- Air Tools 67
- Anti-Tie Down Devices 63

B

- Ball Actuated Valves 24-27
- Binary Valves 58
- Bleed Type Valves 24
- Breathers 69
- Button Operated Valves . . 20-31

C

- Cam Operated Valves . . . 26-31
- Capsula Valves 22-23
- Centaur Cylinders 50-51
- Clevis Brackets 39-45
- Clevis Mounted Cylinders 32-51
- Collet Fixtures 67
- Compact Cylinders 53
- Controls, Presses 63
- Controls, Valves 5-63
- Cylinders

- See "Cylinder Finder" 1
- Adjustable Stroke 54
- Clevis Mounted 32-51
- Compact 53
- Cushioned 32-51
- Double Acting 32-51
- Double Rod 32-51
- Dyna-Mation 32-39
- End of Stroke Sensors . . . 60
- Flange Mount (Front) . . 32-39
- Flange Mount (Rear) . . 32-39
- Flat Type 55
- Flush Mounted 32-51
- Foot Mounted 32-57
- HD1 Series 40-47

Cylinders (Continued)

- HD Series 48-49
- Hydraulic 32-49
- Interchangeable (JIC) . . 40-49
- Interchangeable (NFPA) 40-49
- Inter-piloted 35-49
- Low Profile 53
- Miniature 55-56
- Non-Lubricated 32-50
- Nose Mounted 32-50
- Pivot Brackets 32-50
- Pivot Mounted 32-50
- Reed Switches 35-52
- Rod Clevis 37-47
- Rod Eyes 37-47
- Round Type 50-51
- Single Acting 54
- Space Saver 53
- Spring Return 55-56
- Square End 32
- Stroke Sensors 60
- Tie Rod Type 32-49
- Trunnion Mounted . . . 32-49

D

- DIN Connector 68
- DIN Connector Solenoid . . 4-26
- Directional Control Valves . 4-31
- Double Acting Cylinders

 - Centaur 50-51
 - Cushioned 32-49
 - Double Rod 32-49
 - DM1 32-39
 - DM2 35-39
 - Dyna-Mation 32-39
 - Interchangeable (NFPA) 40-49
 - Low Profile 53
 - Non-Lubricated 32-50
 - Round Type 32-51
 - Space Saver 53
 - Tie Rod Type 32-51

- Double Air Piloted Valves 17-27
- Double Bleed Valves 24
- Double Rod Cylinders . . 32-39
- Double Solenoid Valves . . 4-27
- Dura-Matic Valve 24
- Dyla-Trol Flow Controls . . . 62
- Dyna-Coil Valves 58
- Dyna-Mation Cylinders . . 34-39

E

- Electric Switches 60
- Emergency Stop Valves . . 27-29
- End of Stroke Sensors 60
- Exhaust Silencers 69

F

- Fingertip Operated Valves 25-31
- Flange Mounted Cylinders 32-48

 - Front 32-48
 - Rear 32-48

- Flat Cylinders 53-56
- Flow Control Valves

 - Air Exhaust Silencer Type . 69
 - Built In Valve 24
 - Dyla-Trol 62
 - Inline Type 62
 - Right Angle 68

- Flush Mounted Cylinders . 32-48
- Foot Mounted Cylinders . 34-48
- Foot Operated Valves 21-27

 - Pedal Type 21-27
 - Treadle Type 31

- Four Way Valves 4-31

G

- General Purpose Valves . . 30-31

H

- HD1 Cylinders 40-47
- Solid State Switches . . . 35-52
- Hammers, Air 67
- Hand Operated Valves . . 21-61
- Heavy Duty Cylinders . . 40-49
- Hydraulic Cylinders . . . 32-49

I

- Impulse Relay Valves 59
- Isonic Valves 4-19
- Isonic MOD 3+ Valves . . . 4-9
- Isonic 2 & 3-Way Valves . . 10-14
- Isonic 4 Way Valves 16-19

J

- JIC Interchangeable Cylinders . . . 34-49

K

- Knob Actuated Valves . . 26-61

L

- Lever Operated Valves . . 21-57
- Lockout valve 57
- Low Stress Valve 25

M

- Manifold Valves 4-27
- Manifolds 68
- Manual Overrides 4-21
- Micro-Line Valves 28-29
- Mufflers 69

N

- Normally Closed Valves . . 4-61
- Normally Open Valves . . . 4-61
- Nova Valves 20-21

O

- One-Way Roller Leaf Valves 26-28

P

- Palm Operated Valves . . 25-29
- Panel Mounted Valves . . 27-61
- Pilot Valves 16-29
- Pin Plunger Operated Valves . . . 26-29
- Plunger Operated Valves . 26-29
- Poppet Type Valves 11-30
- Press Controls 63
- Presses, Air

 - Arbor Type 64
 - Bench 64
 - Column Type 64
 - Stand 64

- PTO Valves 61
- Pulse Valves 59
- Pushbutton Operated Valves . . . 21-26

Q

- Quick Exhaust Valves 69

R

- Reed Switches 35-52
- Rod Actuated Valves . . . 26-28
- Rod Alignment Couplers . . . 35
- Rod Clevises 35-49
- Rod Eyes 32-37
- Roller Operated Valves . . 26-28
- Round Cylinders 50

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index

S

Safety Devices27-29

Selector Valve58

Shuttle Valves69

Single Solenoid Valves
 Direct Acting6-58
 Piloted6-28

Slide Type Valves57

Solenoid Valves
 DIN Connector Type ...4-29
 Double4-29
 Plug -In Type4-29
 Single (Direct)4-29
 Single (Piloted)4-29

Speed Control Valves
 ... (See Flow Control Valves)

Spool Type Valves
4-31

Spring Return Cylinders ...54

Stacked Valves ...4-19, 24-25

Sub-Base Mounted Valves
22-24

Switches
 Air Operated ...14-22, 24-27
 Bleed Limit24
 Electric60
 Limit26-29
 Reed35-52
 Solid State35-52

T

Three Position Valves27

Three Way Valves6-29

Timers, Air59

Toggle Lever Valves26-29

Treadle Type Foot Valve ...31

Trunnion Mounted Cylinders ..
34-49

Two-Hand Anti Tie Down ...63

Twist Valves26-29

Two Position Valves4-58

Two Way Valves
 Poppets11-30
 Solenoid4-58

V

Valves
 See "Valve Finder"2-3

ACV Valve61

Adjustable Lever26-28

Air Piloted16-29

Air to Electric Converter .60

Ball Actuated26-29

Bleed Type20

Button Operated21-29

Cam Operated26-29

Capsula22-23

Dash Mounted61

DIN Type52

Directional Control ...4-29

Double Air Pilot16-27

Double Bleed20

Double Solenoid4-26

Dura-Matic24

Dyal-Trol62

Dyna-Coil58

Electric Switches60

Emergency Stop27-29

Fingertip Operated27

Flow Control68

Flow Control Air Exhaust

Silencers69

Four Way4-27

Hand Operated21-31

Impulse Relays59

Knob Actuated26-29

Lever Operated21-29

LTV Type26

Manifold4-27

Manual Overrides4-21

MHL Valves57

Micro-Line28

MOD3+ (Isonic)4-9

Nova20

One Way Roller Leaf ...26-28

Palm Operated26-27

Panel Mounted26-61

Piloted14-27

Pin Plunger26-29

Plug In Solenoid4-28

Poppet Type13-29

Press Control63

Pressure Held22

Pressure Released22

Pressure Piloted16-22

PTO61

Pulse Type59

Push Button Operated .26-31

Quick Exhaust69

Rod Actuated26-29

Roller Actuated26-29

Safety27-29

Selector Valve26-29

Shuttle69

Time Delay59

Toggle Lever26-29

Twist26-29

Two Position4-31

Two Way4-31

Vacuum4-31

Reference

Control Valves


Cylinders

Specialty Valves

Production Devices

Accessories

Index

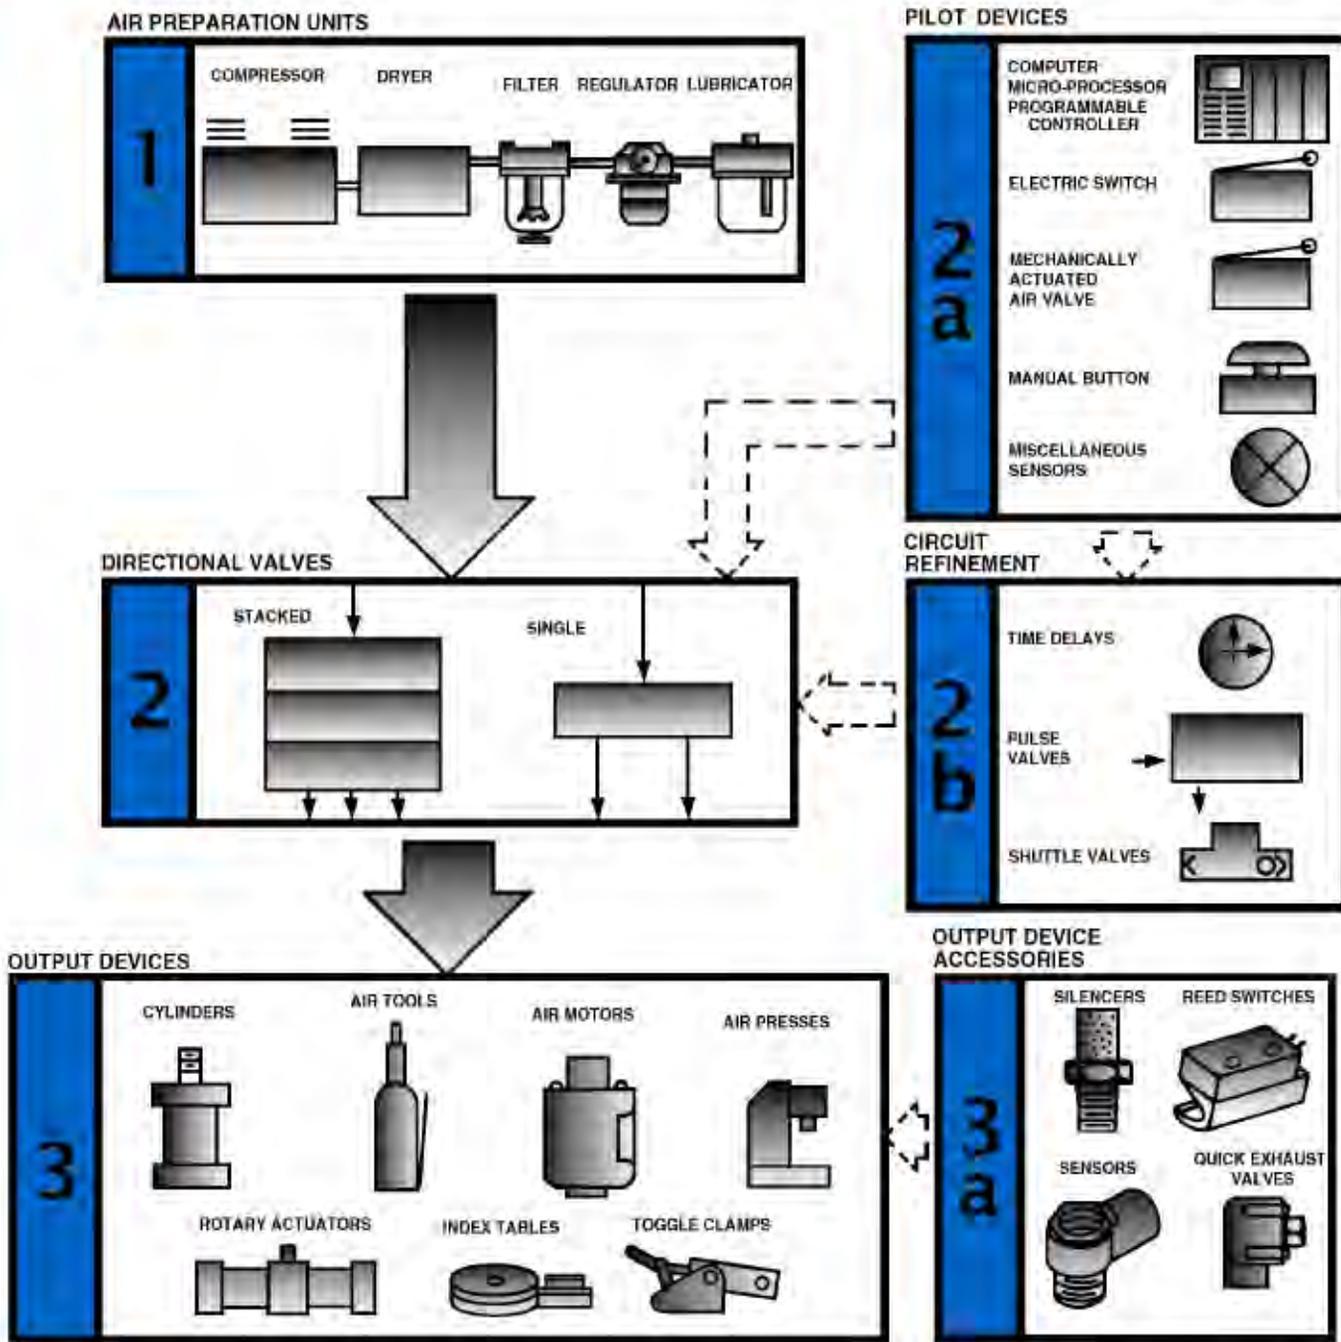

1. Air Preparation Units

Air is compressed by the compressor, moisture is removed by the dryer, cleaned by the filter, adjusted to the correct pressure by the regulator and an oil mist is added by the lubricator. This process results in properly prepared air.

2. Directional Valves

Compressed air is fed to directional valves. Directional valves may be single valves or a stack of two or more valves with a common inlet.

2a. Pilot Devices

Pilot devices are used to shift the directional valves in Step 2.

2b. Circuit Refinement

The output from Step 2a may be refined by using timers, impulse relays, shuttle valves, or other circuit aids.

3. Output Devices

Shown is a sampling of air devices that may be controlled by Steps 1 through 2b.

3a. Output Device Accessories

Output device accessories may be used to control the speed or sense a position in the output device.

MEAD

Pneumatic Automation Components

4114 North Knox Avenue
Chicago, IL 60641
Tel: 773.685.6800
Fax: 773.685.7002
Customer Service Toll Free Number
877-MEAD USA (877-632-3872)
sales@mead-usa.com

Visit our web site at
www.mead-usa.com

YOUR STOCKING DISTRIBUTOR IS:

a **BIMBA** company
www.bimba.com

ISO 9001: 2000 registered

